


XGT Series

Programmable Logic Controller

Fast, Compact, Open Network Solution
Next Generation Technology



Automation Equipment

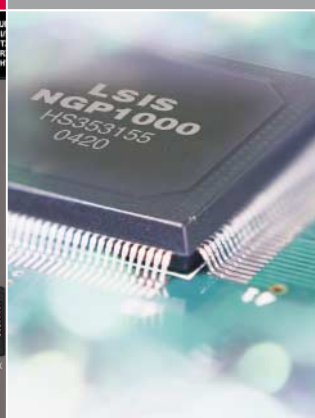


Programmable Logic Controller


XGT Series

XGT series incorporate the latest technological achievements in Programmable Logic Controller, made possible by experience and dedication to quality in design and manufacturing.

Contents

Features	Overview	4
CPU	Features	13
	CPU module	15
	I/O module	20
	Precaution when setting digital I/O module	24
System	XGR Configuration	26
	System configuration method	27
	System configuration	30
	Application	32
Network	General introduction	38
	RAPINet	42
	XGT Ethernet system	44
	XGT Ethernet / IP System	46
	XGT Industrial Optic Ring System	47
	XGT Ethernet switching hub	48
	Computer-Link	50
	Rnet system	52
	DeviceNet system	54
	Profibus system	56
	Computer-Link	58
	Communication example	60
	SMART I/O (Stand alone)	66
	SMART I/O (DeviceNet adapter)	67
	SMART I/O (DeviceNet adapter)	68
	SMART I/O (Profibus-DP adapter)	69
SMART I/O (Rnet adapter)	70	
Features	71	
Special	Analog input module	74
	2Wire Analog input module	76
	Analog output module	78
	Analog input/output module	80
	High-speed counter module	81
	Positioning module [APM]	85
	Positioning module	87
	RTD input module	93
	Thermocouple module	94
Event input module	97	
Software	XG5000 programming	100
	XG-PD programming	110
	APM[Positioning module] Software Package	112
Product	Product list	113
	Dimensions	114
	XGR Dimensions	115

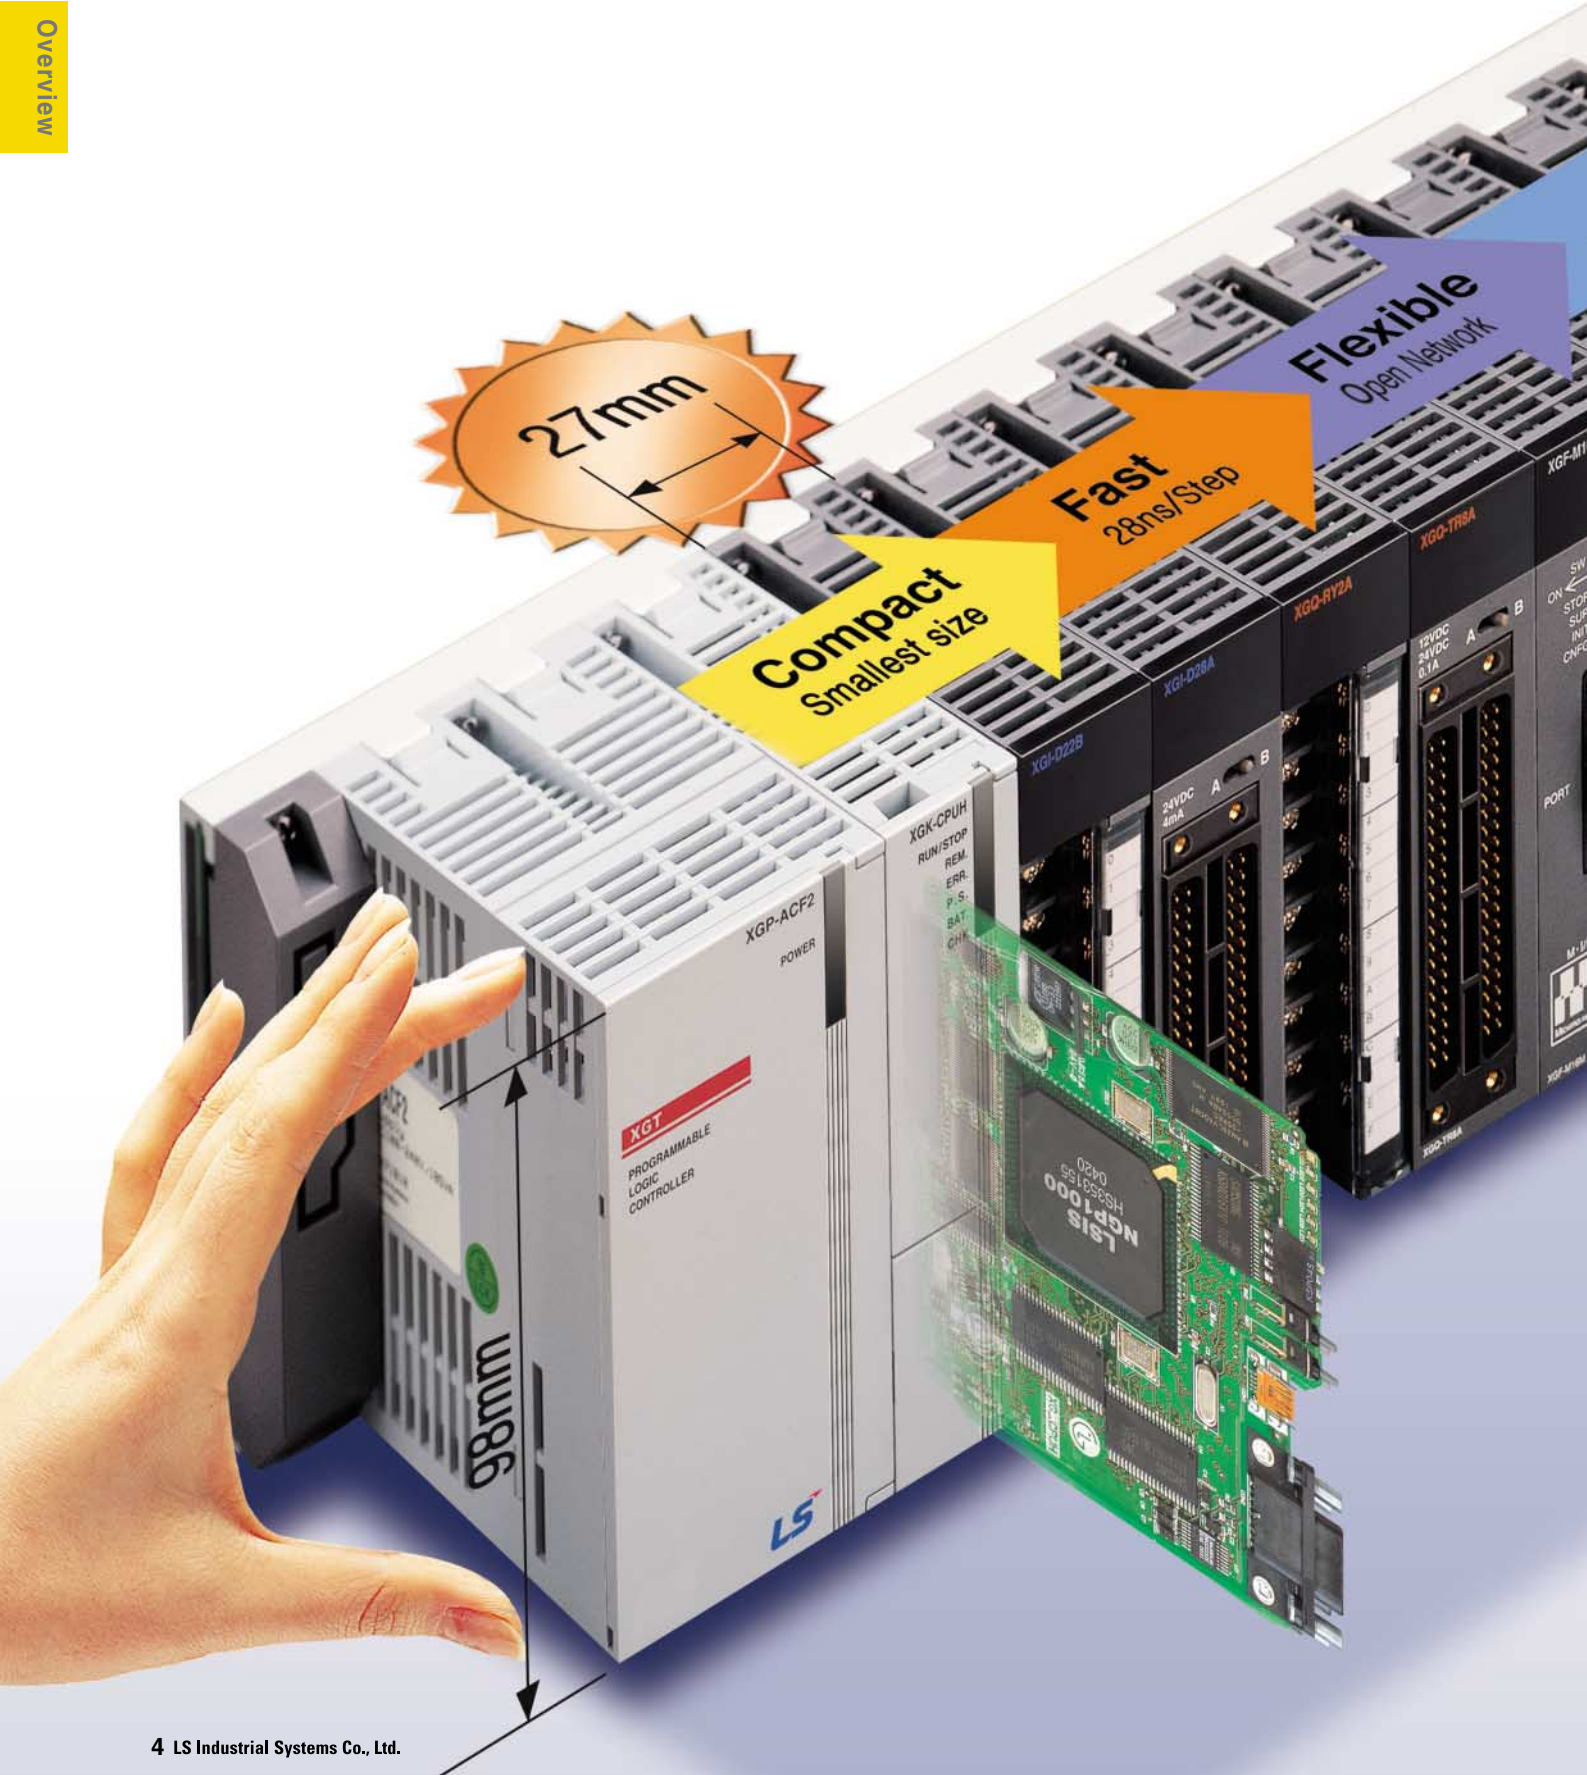

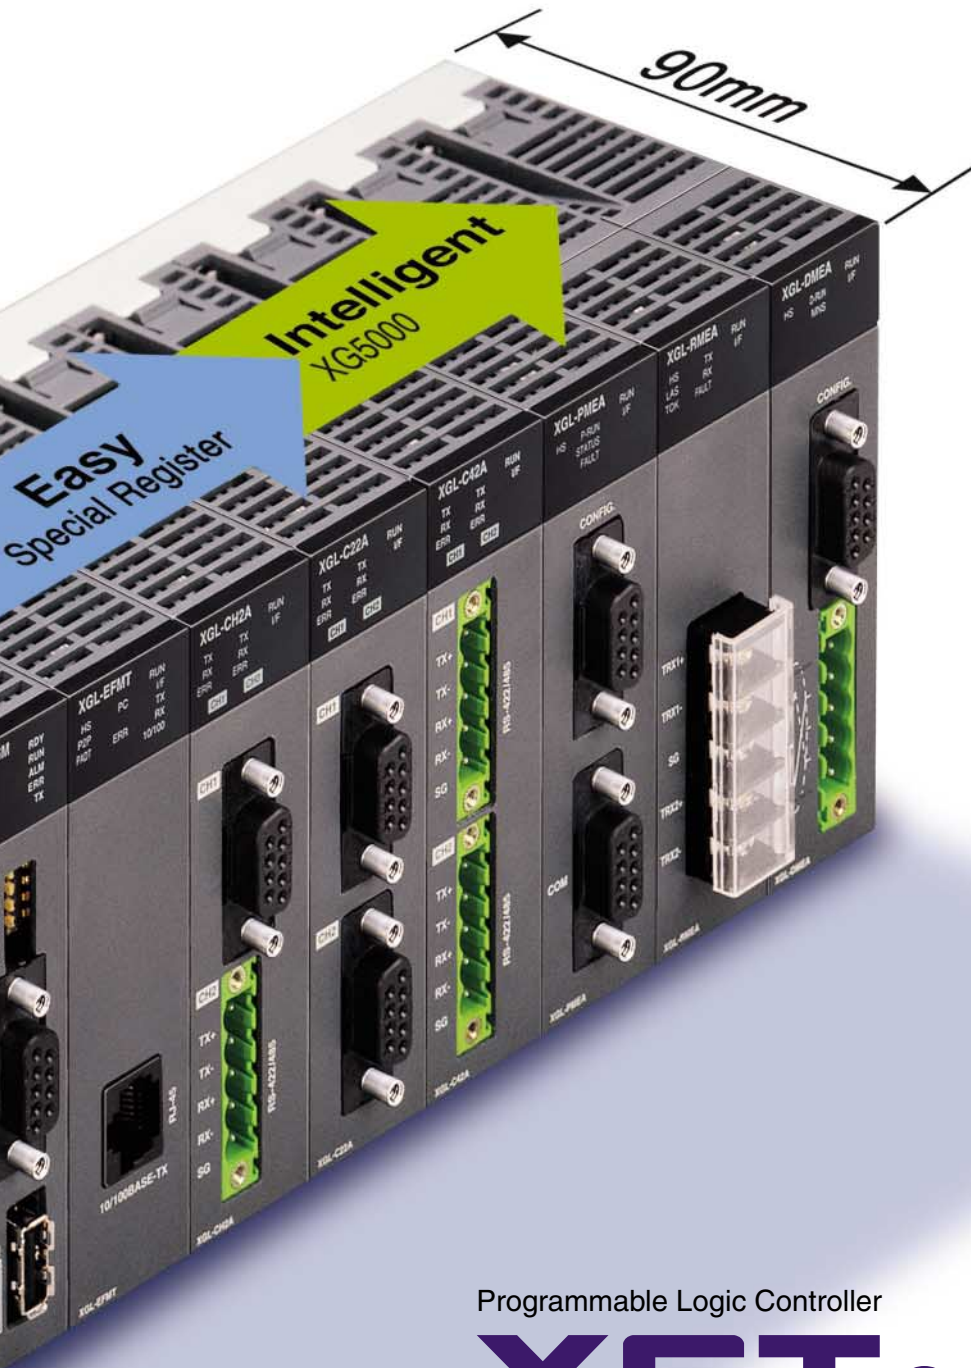


Programmable Logic Controller


XGT Series

neXt Generation Technology

XGT series is the next-generation solution with a new concept providing advanced engineering environment based on open network, fastest processing speed, compact size and user-friendly software.

XGT series is the Industrial Workhorse that can support various applications within the typical industrial plant.

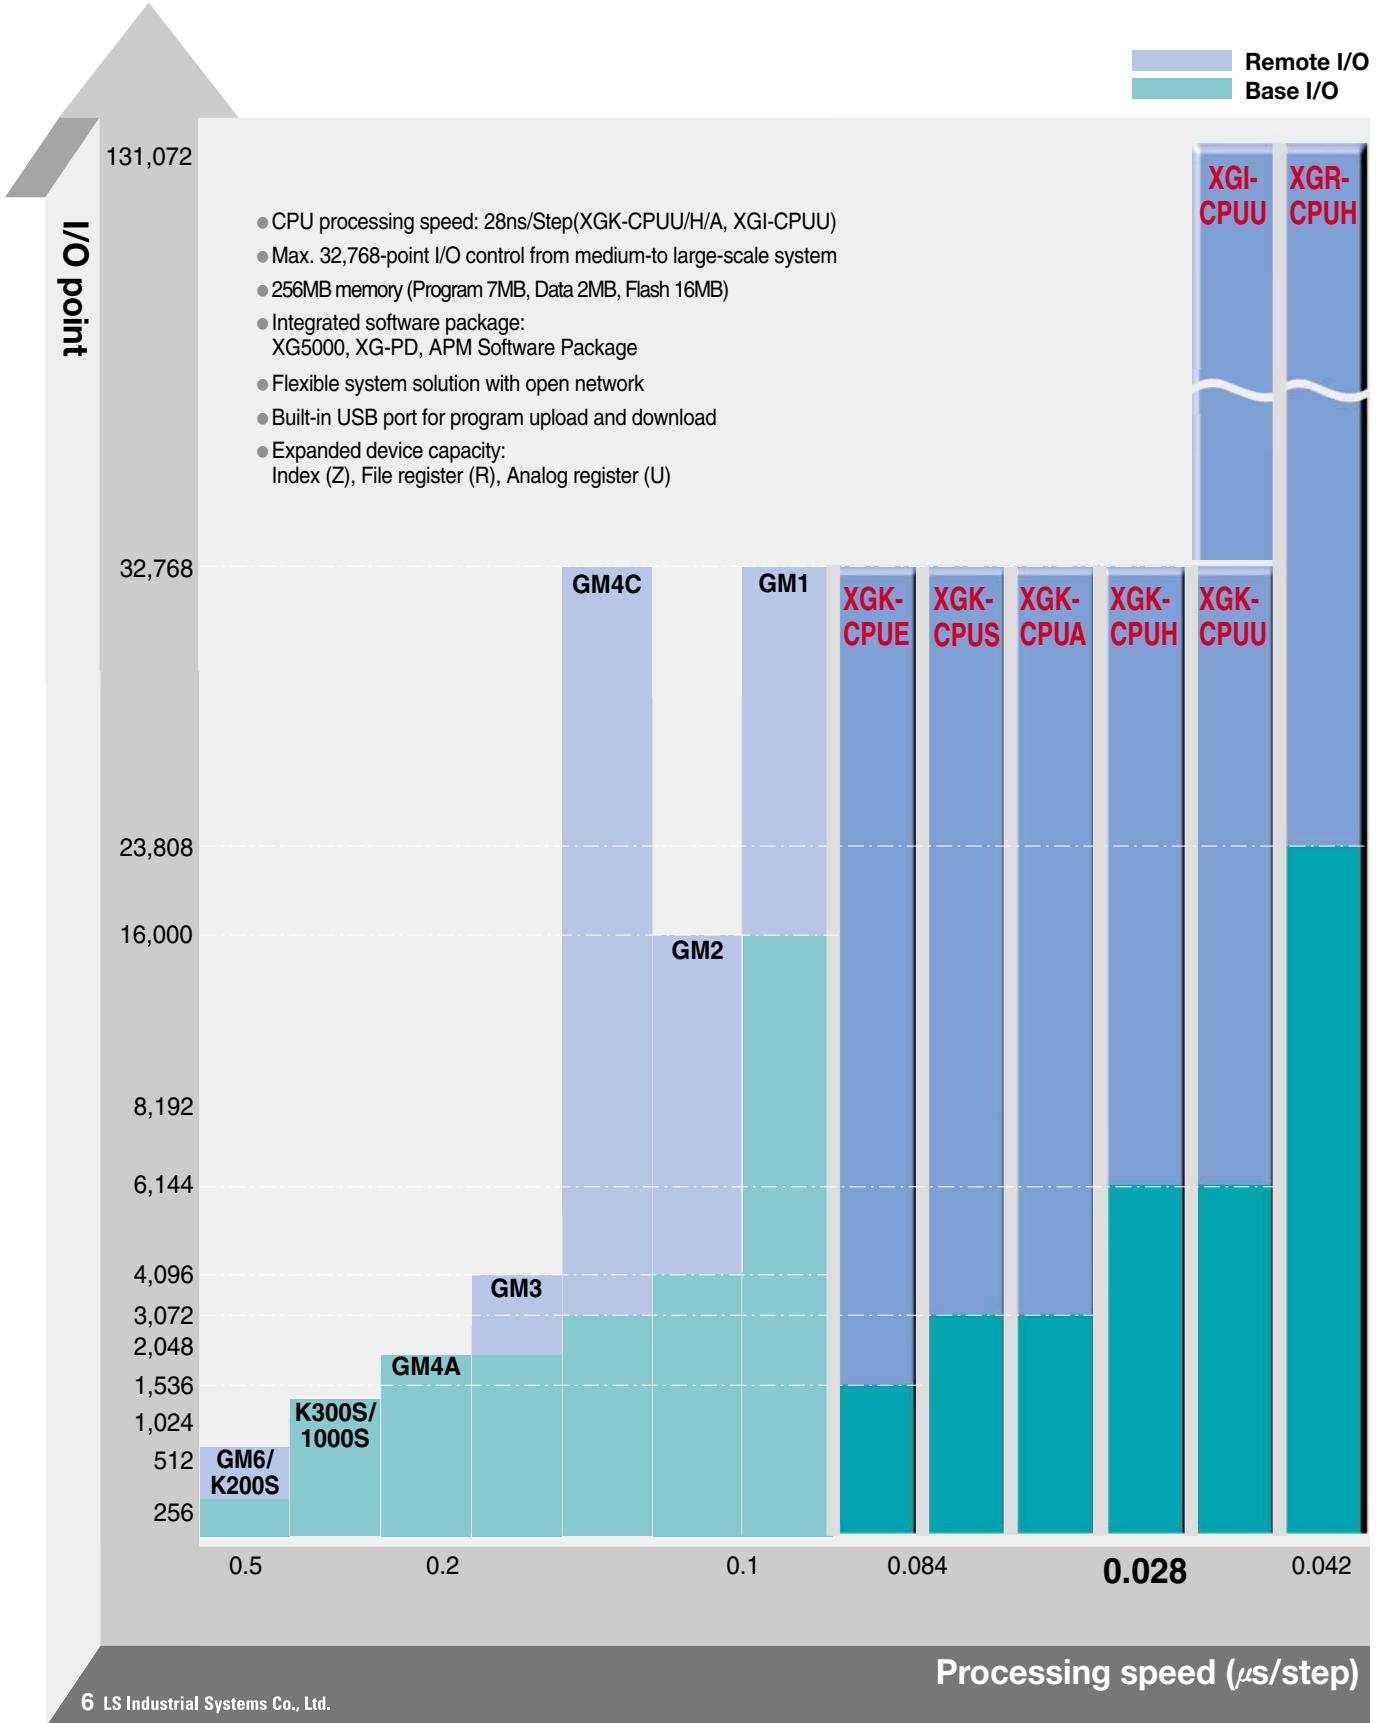

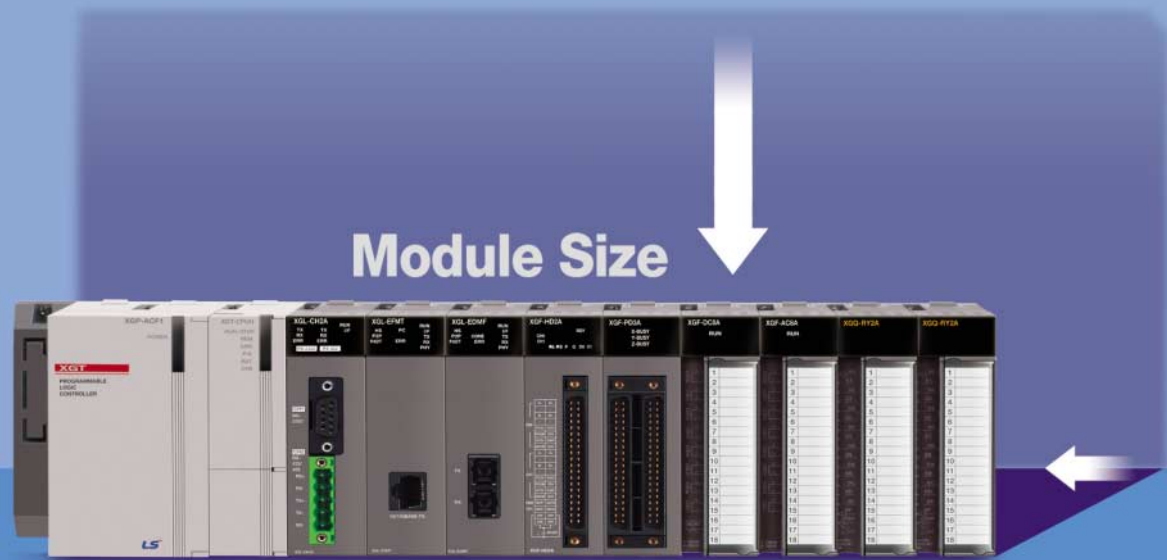


Size Innovation. . . **Compact**

The smallest size

The smallest size (**Dimensions 27 × 98 × 90**) achieves cost-efficiency and various applications.

Item	Power Supply	CPU	8-slot Base
Size (W × H × D)	55 × 98 × 90	27 × 98 × 90	318 × 98 × 15

Speed Innovation. . . Fast

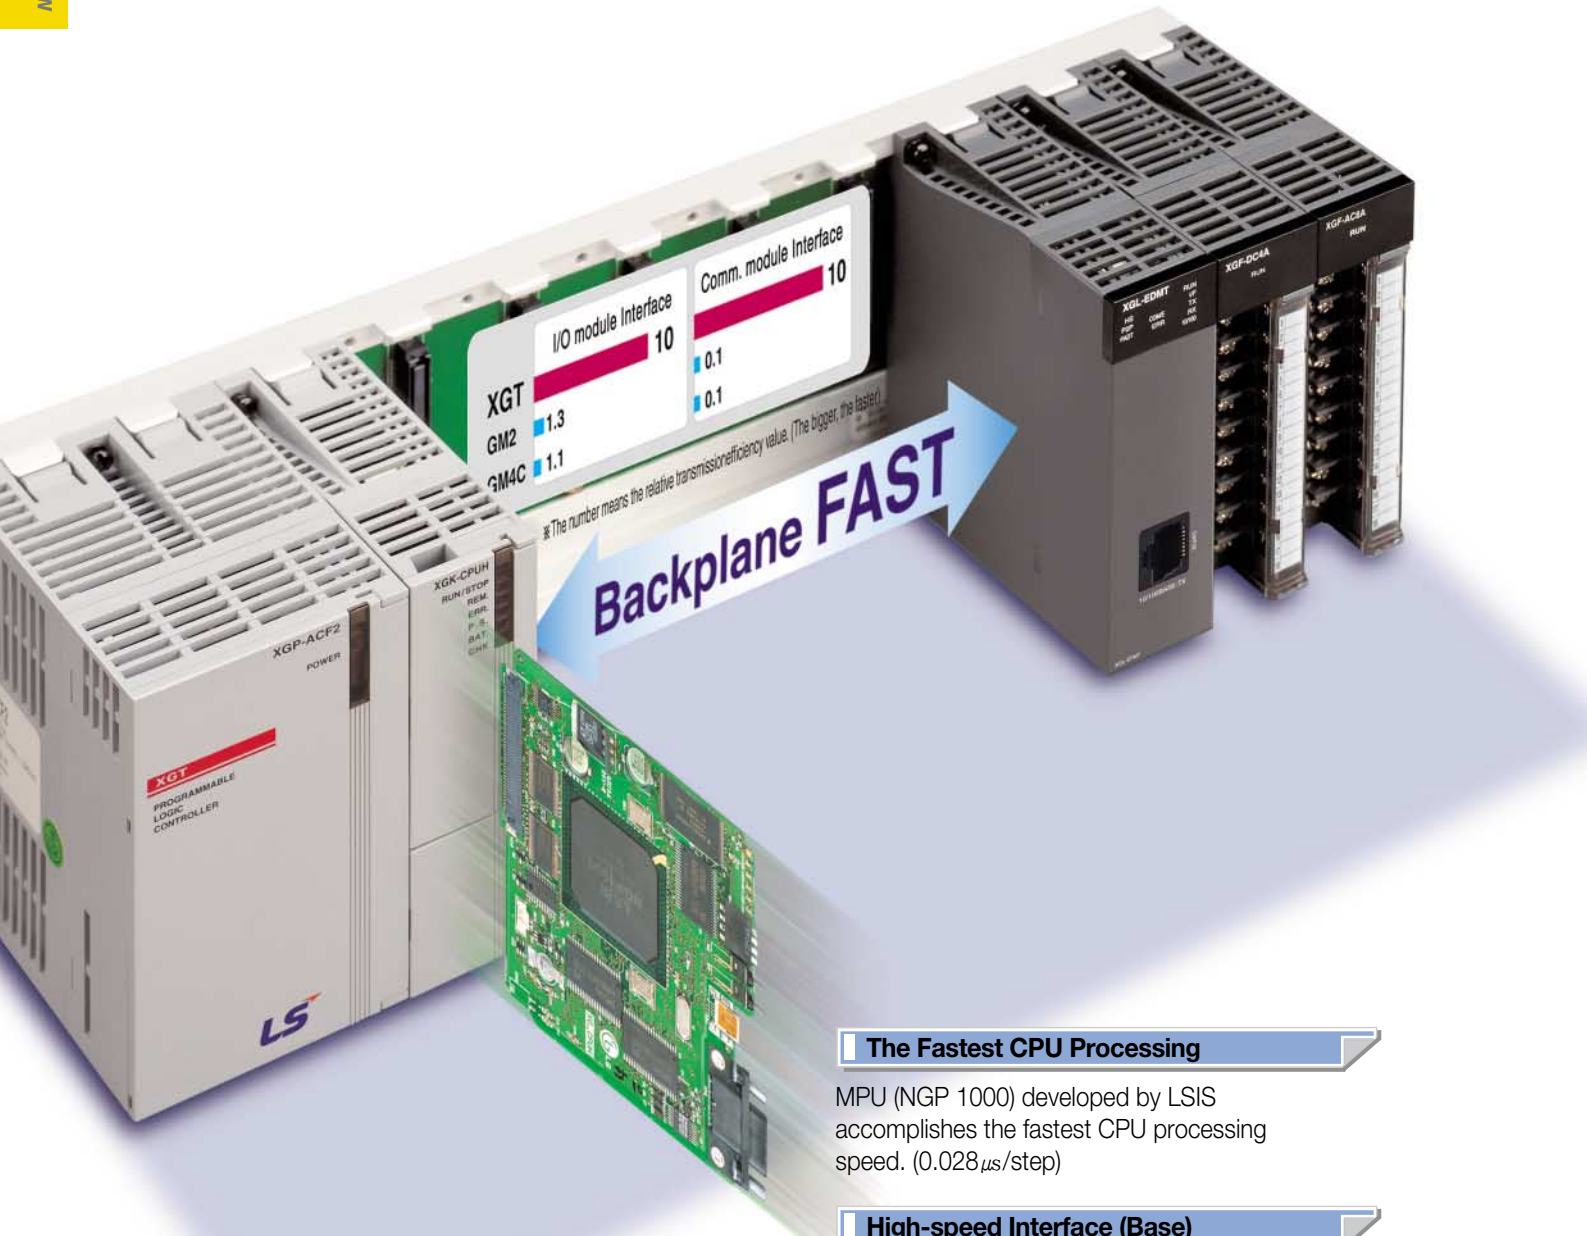

The Fastest CPU Processing

MPU (NGP 1000) developed by LSIS accomplishes the fastest CPU processing speed. (0.028 μ s/step)

High-speed Interface (Base)


Dedicated bus controller and High-speed transmission algorithm achieve high performance of internal interface.

Main Base	Expansion Base
20Mbyte/sec	5Mbyte/sec

Network Innovation. . . Flexible

System Integration of Open Network

XGT series support various communication solutions ranging from field control to information level with Fast Ethernet, Profibus-DP, DeviceNet, MODBUS

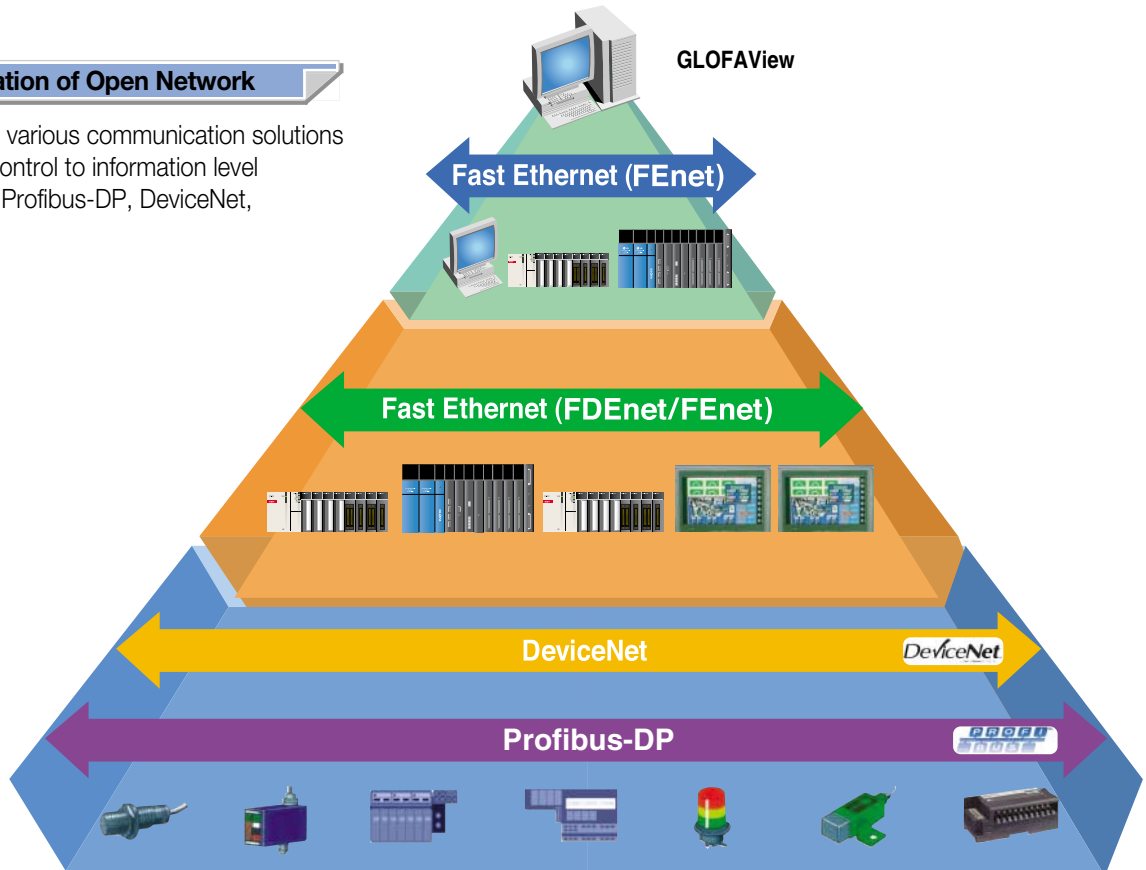

Item	Fast Ethernet		Cnet	Profibus-DP	DeviceNet
	FEnet	FDEnet			
Transmission speed	100 / 10Mbps		300 ~ 115,200bps	Max. 12Mbps	Max. 500Kbps
Transmission distance	100m (Node to Node, UTP/ STP) 2Km (Node to Node, Fiber Optic)		Max 500m (422 / 485)	Max. 1.2Km	Max 500m
Max. number of station	64 (HS link)		32	126	64
Service	HS link	●	-	●	●
	XG protocol	●	-	-	-
	General Protocol	● (MODBUS)	-	● (MODBUS)	-
	P2P	●	●	-	-
	XG5000 I/F	●	●	●	-
E-Mail	●	-	-	-	-
Configuration software	XG-PD			XG-PD & SyCon	
Number of installation	24 (HS link Service: 12, P2P Service: 8)				

Special Register


XGT series expand device memory and support advanced programming environment with Index register (Z), File register (U), and Analog register (U).

R File register
As a non-volatile memory type, data are secured even in times of blackout or CPU reset.

U Analog register
Assigning base, slot and memory buffer of an analog module to device, A/D conversion data can be accessed without analog commands.


Z Index register
Index register is used in the sequence program for array operation.

Example of Analog Register

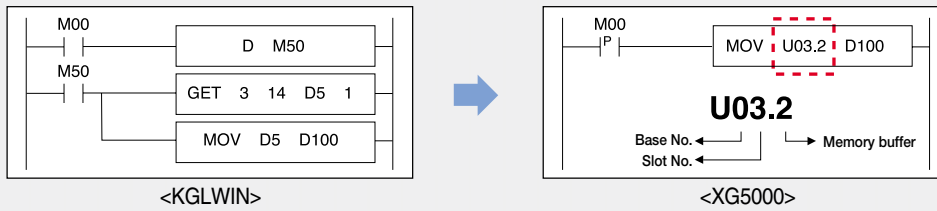

Analog Operation without Programming

Special module setup and operation is achieved by just parameter setting without additional program.

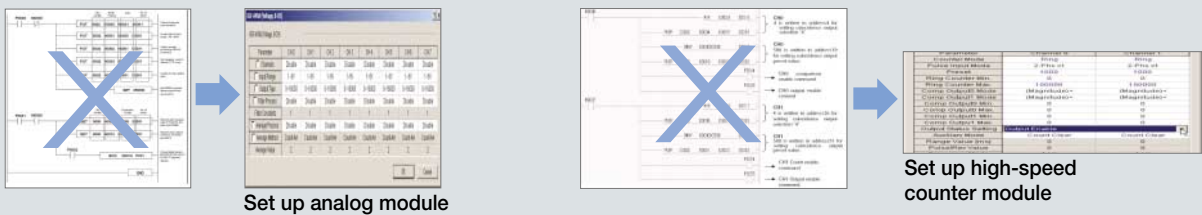


Program Modularization and Task Operation

Available to run multiful programs through medulization of scan programs based on functions and author, and to operate task programs triggered by specific conditions.


	Program type	Description	Number
Scan program	Scan	Executed in every scan	256-task
	Initialization task	Executed only one time when power turns on	1
	Time driven task	Executed with a constant time interval specified in parameter setting	32
Task program	Internal task	Executed by internal condition	32
	External interrupt task	Executed by external interrupt input	32

IEC standard language (XGI): LD, SFC, ST

Ladder Diagram



SFC

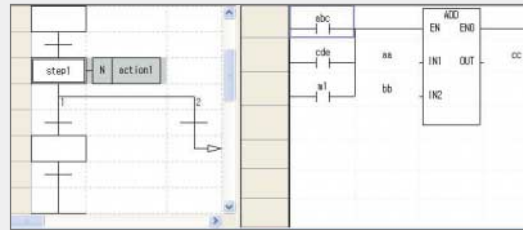

ST

```


19  X2 := (- 0 - SQRT(0))/(2.0*0) ;
20 END_IF ;
21
22
23 // CASE문 예제
24 TV := WORD_BCD_TO_INT(THUMBWHEEL);
25 TV_ERROR := 0;
26 CASE TV OF
27   1,5: DISPLAY := OVEN_TEMP;
28   2: DISPLAY := MOTOR_SPEED;
29   3: DISPLAY := GROSS_TARE;
30   4, 0..10: DISPLAY := ADD(TV, 4);
31 ELSE DISPLAY := 0;
32 TV_ERROR := 1;
33 END_CASE;
34 SMT100 := INT_TO_BCD_WORD(DISPLAY);
35
36 // FOR문 예제
37 SUM := 0;
38 FOR I := 1 TO 3 DO
39   FOR J := 1 TO 2 DO
40     IF FLAG THEN EXIT; END_IF;
41     SUM := SUM + J;
42   END_FOR;
43   SUM := SUM + I;
44 END_FOR;
45
46 X2 := -9.99979858e-002, 0 = 1.000000
47
48
49
50
51
52
53
54
55
56
57 SUM = 15;
58 I = 4;
59 J = 3;
60 FLAG = 0;
61 SUM = 15, J = 3;
62
63 SUM = 15, I = 4;
64

```

ST features


- High-level Language
- Fit for the complicate algorithm
- Various open source (Compatibility)
- Easy data processing
- Convenient text editor

User defined Function block (XGI)

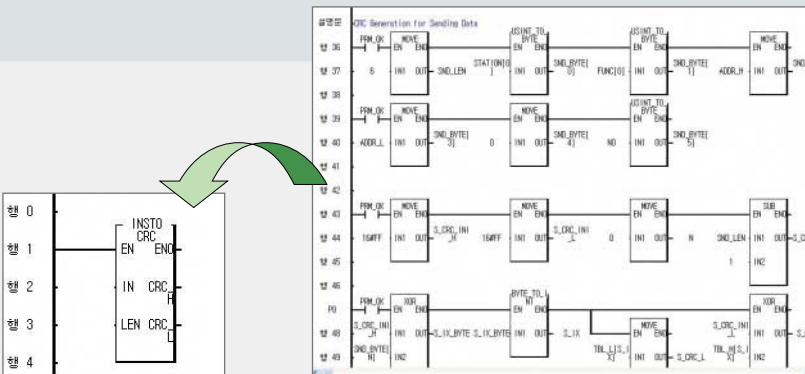

- Standardize the program using function or function block
- Register the standardized program as a library file and reuse the library for another project

Software Innovation. . . Intelligent

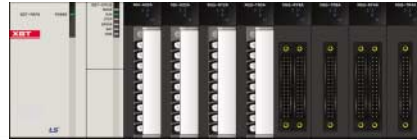

Integrated Programming & Engineering

XG5000 Software Package provides integrated engineering environment from basic programming to different special module setting as well as diagnosis. This package consists of XG5000 (PLC programming), XG-PD (Communication programming) and APM Software Package (Positioning programming).



XG5000

Program Editing & Engineering Software
Windows-based Easy Operation
Multi-PLC Multi-Programming Support
Various Monitoring & Diagnosis Functions




XG-PD

Comm. & Network Parameter Setting
Protocol Editing / Network Diagnosis
Frame Monitoring / Protocol Analysis




APM S/W package

Positioning Parameter Setting
Data Editing in EXCEL
Various Monitoring & Diagnosis
Tracking Function

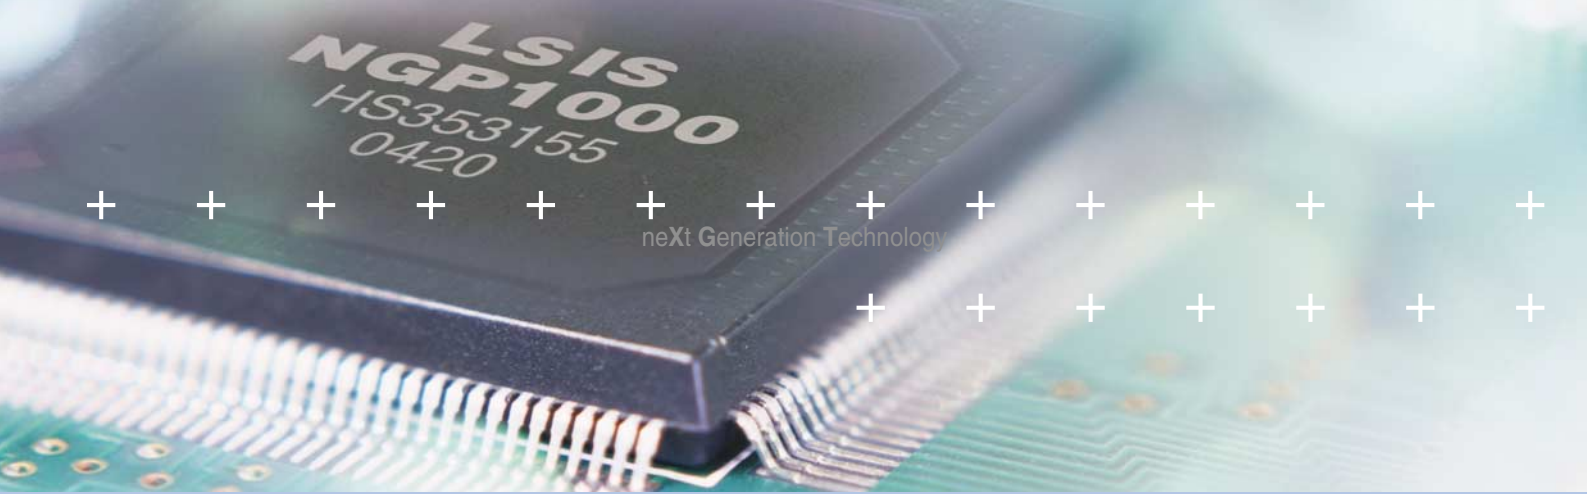

CPU



CPU & System configuration

XGT series contain variety of CPU types for customized solutions which support wide coverage from small/middle- to large size-system control.

IEC based CPU for high-speed and large scale application



XGI-CPUU (IEC Standard)

- Program capacity: 1Mbyte
- I/O points: 6,144
- I/O device point: 131,072 (Remote I/O)
- Processing speed: 28ns/step
- IEC 61131-3 standard programming
 - LD (ladder), SFC (Sequential Function Chart)
 - ST (Structured Text)
 - User defined FB (Function block)
- Powerful built-in PID and Process control
 - Max. 256 loops and variety of process functions
- Utilize the same I/O with XGK CPU
- Enable to convert from GLOFA PLC program to XGI program



XGI-CPUH (IEC Standard)

- Program capacity: 512Kbyte
- I/O points: 6,144
- I/O device point: 131,072 (Remote I/O)
- Processing speed: 28ns/step
- IEC 61131-3 standard programming
 - LD (ladder), SFC (Sequential Function Chart)
 - ST (Structured Text)
 - User defined FB (Function block)
- Powerful built-in PID and Process control
 - Max. 256 loops and variety of process functions
- Utilize the same I/O with XGK CPU
- Enable to convert from GLOFA PLC program to XGI program

Premium CPU for high-speed and large scale application



XGK-CPUU (Ultra capacity)

- Program capacity: 128K steps
- I/O points: 6,144
- I/O device point: 32,000 (Remote I/O)
- Processing speed: 28ns/step

XGK-CPUH (High performance)

- Program capacity: 64K steps
- I/O points: 6,144
- I/O device point: 32,000 (Remote I/O)
- Processing speed: 28ns/step



XGK-CPUA (Advanced)

- Program capacity: 32K step
- I/O point: 3,072
- I/O device point: 32,000 (Remote I/O)
- Processing speed: 28ns/step

General sequence controller PLC CPU



XGK-CPUS (Standard)

- Program capacity: 32K steps
- I/O points: 3,072
- I/O device point: 32,000 (Remote I/O)
- Processing speed: 84ns/step





XGK-CPUE (Economic)

- Program capacity: 16K step
- I/O point: 1,536
- I/O device point: 32,000 (Remote I/O)
- Processing speed: 84ns/step

CPU & System configuration / CPU module

System composition

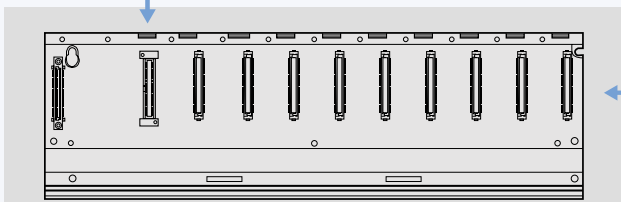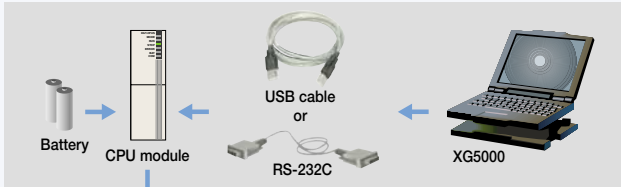


Main Base (XGB-M□□A)



Expansion cable (XGC-E□□□)


Item	Type	Description
Expansion cable	XGC-E041	Expansion cable 0.4m
	XGC-E061	Expansion cable 0.6m
	XGC-E121	Expansion cable 1.2m
	XGC-E301	Expansion cable 3.0m
	XGC-E501	Expansion cable 5.0m
	XGC-E102	Expansion cable 10m
Expansion terminator	XGC-E152	Expansion cable 15m
	XGT-TERA	Expansion terminator

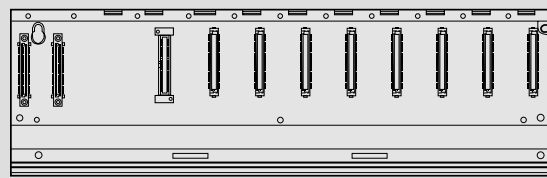


Expansion base (XGB-E□□A)

Item	Main base	Expansion base
4 Slot	XGB-M04A	XGB-E04A
6 Slot	XGB-M06A	XGB-E06A
8 Slot	XGB-M08A	XGB-E08A
12 Slot	XGB-M12A	XGB-E12A

• XG5000 Cable (RS-232C)

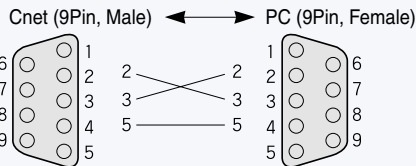

Power module (XGP-□□□□)



Input module (XGI-□□□□)



Output module (XGO-□□□□)



Special module (XGF-□□□□)



Communication module (XGL-□□□□)

CPU module			
Type	I/O point		
XGI-CPUU/XGI-CPUH	6,144 (IEC type)		
XGK-CPUU/CPUH	6,144		
XGK-CPUA	3,072		
XGK-CPUS	3,072		
XGK-CPUE	1,536		
Item	Type	Description	
USB cable	USB-301A	USB downloading cable	
RS-232C cable	KIC-050A	RS-232C downloading cable	
Power module			
AC	Free Voltage	XGP-ACF1	DC5V 3A
		XGP-ACF2	DC24V 0.6A
DC	220V	XGP-AC23	DC5V 6A
		XGP-DC42	DC5V 8.5A
DC	220V	XGP-AC23	DC5V 8.5A
		XGP-DC42	DC5V 6A
Item	Input module		
8 points	AC110V	AC220V	DC24V
	-	XGI-A21A	XGI-D21A
16 points	XGI-A12A	-	XGI-D22A
	-	-	XGI-D22B
32 points	-	-	XGI-D24A
	-	-	XGI-D24B
64 points	-	-	XGI-D28A
	-	-	XGI-D28B
Item	Output module		
8 points	Relay	Triac	Transistor
	XGQ-RY1A	-	-
16 points	XGQ-RY2A	XGQ-SS2A	XGQ-TR2A
	XGQ-RY2B	-	XGQ-TR2B
32 points	-	-	XGQ-TR4A
	-	-	XGQ-TR4B
64 points	-	-	XGQ-TR8A
	-	-	XGQ-TR8B
Item	Input/Output mixed module		
-	16-point DC input	16-point TR output	
Special module			
Analog input	XGF-AV8A	Voltage input type, 8Ch	
	XGF-AC8A	Current input type, 8Ch	
	XGF-AD8A	Voltage/ Current input, 8Ch	
	XGF-AD4S	Voltage/ Current input, 4Ch (Isolated)	
Analog output	XGF-AD16A	Voltage/ Current input, 16Ch	
	XGF-AW4S	2-wire, Voltage/ Current input, 4Ch (Isolated)	
	XGF-DV4A	Voltage output type, 4Ch	
	XGF-DC4A	Current output type, 4Ch	
Analog Input/Output	XGF-DV8A	Voltage output type, 8Ch	
	XGF-DC8A	Current output type, 8Ch	
	XGF-DV4S	Voltage output, 4Ch (Isolated)	
	XGF-DC4S	Current output, 4Ch (Isolated)	
High-speed counter	XGF-AH6A	Input: 4Ch, Voltage/ Current Output: 2Ch Voltage/ Current	
	XGF-HO2A	Pulse (OC) input type, 2Ch	
Positioning	XGF-HD2A	Pulse (LD) input type, 2Ch	
	XGF-P01A-P03A	Open collector, 1~3axis	
	XGF-PD1A-PD3A	Line drive, 1~3axis	
	XGF-P01H-P04H	Open collector, 1~4axis	
Temperature control	XGF-PD1H-PD4H	Line drive, 1~4axis	
	XGF-TC4S	Thermocouple input, 4Ch	
Temperature controller	XGF-RD4A	RTD input, 4Ch	
	XGF-RD4S	RTD input, 4Ch (Insulated)	
Event input	XGF-TC4UD	Temperature controller, 4 loops, Universal input	
	XGF-SOEA	DC24V, 32points	
Communication module			
RAPIenet	XGL-EIMT	RAPIenet Twisted fair 2Ch	
	XGL-EIMH	RAPIenet Fiber optic/Twisted fair 1Ch	
	XGL-EIMF	RAPIenet Fiber optic 2Ch	
	XOL-EIMT	RAPIenet Twisted fair 2Ch For PC	
Cnet	XOL-EIMF	RAPIenet Fiber optic 2Ch For PC	
	XGL-CH2A	RS-232C/RS-422	
	XGL-C22A	RS-232C, 2Ch	
	XGL-C42A	RS-422, 2Ch	
Ethernet (Open)	XGL-EFMF	Fiber optic, Master, SC type	
	XGL-EFMT	Twisted pair, Master, RJ-45	
	XGL-ESHF	Fast Ethernet, Industrial Ring module	
	XGL-EHST	Fast Ethernet, Switching hub	
Ethernet (Dedicated)	XGL-EDMF	Fiber optic, Master, SC type	
	XGL-EDMT	Twisted pair, Master, RJ-45	
EtherNet/IP	XGL-EIPT	Industrial Ethernet, 2ports	
Rnet	XGL-RMEA	Rnet, Master, TP	
DeviceNet	XGL-DMEA	DeviceNet, Master	
Profibus-DP	XGL-PMEA	Profibus-DP, Master	
Fnet	XGL-FMEA	Dedicated network	

CPU

Specifications

Item	Description	Standard			
Ambient temperature	0 ~ 55 °C				
Storage temperature	-25 ~ +70 °C				
Ambient humidity	5 ~ 95%RH (Non-condensing)				
Storage humidity	5 ~ 95%RH (Non-condensing)				
Vibration resistance	Occasional vibration		10 times each direction (X, Y and Z)	IEC 61131-2	
	Frequency	Acceleration			Pulse width
	10 ≤ f < 57Hz	-			0.075mm
	57 ≤ f < 150Hz	9.8m/s ² (1G)			-
	Continuous vibration				
	Frequency	Acceleration			Pulse width
10 ≤ f < 57Hz	-	0.035mm			
57 ≤ f < 150Hz	4.9m/s ² (0.5G)	-			
Shock resistance	· Peak acceleration: 147 m/s ² (15G) · Duration: 11ms · Half-sine, 3 times each direction per each axis		IEC 61131-2		
Noise resistance	Square wave impulse noise	± 1,500p-p		LSIS Standard	
	Electrostatic discharge	± 4KV		IEC 61131-2, IEC 1000-1-2	
	Radiated electromagnetic field noise	27~500MHz, 10V/m		IEC 61131-2, IEC 1000-1-3	
	Fast transient/ Burst noise	0.25KV		IEC 61131-2, IEC 1000-1-4	
Operating Ambience	Free from corrosive gases and excessive dust				
Altitude	Up to 2,000m				
Pollution degree	Less than equal to 2				
Cooling	Air-cooling				

* Pollution degree 2 is nonconductive pollution of the sort where occasionally a temporary conductivity caused by condensation must be expected.

Item	Description					Remarks
	XGK-CPUE	XGK-CPUS	XGK-CPUA	XGK-CPUH	XGK-CPUU	
Operation method	Cyclic execution of stored program, Time-driven interrupt, Process-driven interrupt					
I/O control method	Batch processing by scan synchronization (Refresh), Direct input/output by instructions					
Program language	Ladder diagram, Instruction list					
Number of instructions	Basic					42
	Application					600
Processing speed	Sequence instruction (μs)		0.028μs/step			
	Application instruction (μs)		0.084μs/step			
	Floating instruction (μs)		±: 0.602μs (S), 1.078μs (D) ×: 1.106μs (S), 2.384μs (D) ÷: 1.134μs (S), 2.66μs (D)			
Program capacity	16K Steps	32K Steps	32K Steps	64K Steps	128K Step	
I/O points (available to install)	With 16-point I/O		384	768	768	1536
	With 32-point I/O		768	1536	1536	3072
	With 64-point I/O		1536	3072	3072	6144
Data area	P	P0000 ~ P2047F (32768 points)				I/O relay
	M	M0000 ~ M2047F (32768 points)				Auxiliary relay
	K	K000 ~ K2047F (32768 points)				Special relay
	L	L000 ~ L11263F (32768 points)				Link relay
	F	F000 ~ F2047F (32768 points)				Keep relay
	T	100ms: T0000 - T0999				Timer (Adjustable)
		10ms: T1000 - T1499				
		1ms: T1500 - T1999				
	C	0.1ms: T2000 - T2047				Counter
		C0000 ~ C2047				
S	S00.00 ~ S127.99				Step controller	
D	D0000 ~ D19999		D0000 ~ D32767			Register
U	U0.0-U1F.31	U0.0-U3F.31	U0.0-U3F.31	U0.0-U7F.31		Analog resistor
Z	128points				Index register	
File register	RAM: 1 block		RAM: 2 blocks			1 block: R0 ~ R32767
	Flash: 2M byte, 32 blocks					
Program type	Total program					256
	Initialization					1 (LINT)
	Time-driven					32
	External					32
Operation mode	Internal					32
	RUN, STOP, DEBUG					
Self-diagnosis	Execution, Delay, Memory error, I/O error, Battery error, Power error					
Programming port	RS-232C (1Ch), USB (1Ch)					MODBUS slave
Data retention at power failure	Set "retain" at data declaration					
Max. expansion stage	2	4	4	8		
Current consumption (mA)	960		960			
Weight (Kg)	0.12		0.12			

Specifications

Item		XGI-CPUU	XGI-CPUH	Remarks	
Operation system		Reiterative operation, fixed cycle operation, constant scan			
I/O Control system		Scan synchronous batch processing system(refresh system), direct system by command			
Program language		Ladder Diagram, SFC (Sequential Function Chart), ST (Structured Text), IL (Read only)			
No. of commands	Operator	18			
	Basic function	136 types + real number operation function			
	Basic function block	43			
	Dedicated function block	Dedicated function blocks by special function modules, communication dedicated function block(P2P)			
Operation processing speed (basic command)	Basic	0.028 μ s/step			
	MOVE	0.084 μ s/step			
	Real number operation	\pm :0.392 μ s(S), 0.924 μ s(D) \times :0.896 μ s(S), 2.240 μ s(D) \div :0.924 μ s(S), 2.254 μ s(D)		S: Single real number D: Double real number	
Program memory capacity		1Mbyte	512Kbyte	Including upload program	
I/O points(installable)		6,144points			
Max. I/O memory contact)		131,072points			
Data memory	Symbolic variable area(A)	512KB (max. 256KB retain settable)			
	I variable(I)	16Kbyte			
	Q variable(Q)	16Kbyte			
	Direct variable	M	256KB (max. 128KB retain settable)		64kbyte per block
		R	64Kbyte * 2block		
		W	128Kbyte		System flag
	Flag variable	F	4Kbyte		PID flag
		K	16Kbyte		High speed link flag
		L	22Kbyte		
U		8Kbyte			
Flash area		2Mbyte, 32block		Controllable by R device	
Timer		No point limit Time range: 0.001~ 4,294,967.295 second(1,193 hours)		20 bytes of symbolic variable area per point	
Counter		No point limit Coefficient range : 64 bit expression		8 bytes of symbolic variable area per point	
Program structure	Total no. of programs	256			
	Initialization task	1			
	Fixed cycle task	32			
	Internal device task	32			
Operation mode		RUN, STOP, DEBUG			
Restart mode		Cold, Warm			
Self diagnosis		Operation delay monitoring, memory fault, I/O fault, battery fault, power fault and etc			
Built-in function		Modbus slave, PID			
Download port		RS-232C(1CH), USB(1CH)			
Data protection in case of power failure		Retain area setting by basic parameters			
Max. base extension		8		Total length :15 m	
Current consumption(mA)		960			
Weight (kg)		0.12			

XGK system configuration

Item	XGK-CPUE	XGK-CPUS	XGK-CPUA	XGK-CPUH	XGK-CPUU																																																																	
Max. expansion stage	1 stages	3 stages	3 stages	7 stages	7 stages																																																																	
Max. installation of module	24 modules	48 modules	48 modules	96 modules	96 modules																																																																	
Max. number of I/O point	1,536	3,072	3,072	6,144	6,144																																																																	
Max. expansion distance	15m																																																																					
Assignment of I/O number (Fixed)	<ul style="list-style-type: none"> 64 points are assigned to each slot of base regardless of installation of module. I/O numbers equivalent to 12 slots are assigned to a base. The starting number of base '0' is P0000. Refer to the following figure regarding the I/O number assignment of 12 slots <table border="1"> <thead> <tr> <th>Slot number:</th> <th>0</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> <th>9</th> <th>10</th> <th>11</th> </tr> </thead> <tbody> <tr> <td>Power</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>CPU</td> <td>64 points</td> <td>64 points</td> <td>64 points</td> <td>64 points</td> <td>64 points</td> <td>64 points</td> <td>64 points</td> <td>64 points</td> <td>64 points</td> <td>64 points</td> <td>64 points</td> <td>64 points</td> </tr> <tr> <td></td> <td>P0</td> <td>P40</td> <td>P80</td> <td>P120</td> <td>P160</td> <td>P200</td> <td>P240</td> <td>P280</td> <td>P320</td> <td>P360</td> <td>P400</td> <td>P440</td> </tr> <tr> <td></td> <td>P3F</td> <td>P7F</td> <td>P11F</td> <td>P15F</td> <td>P19F</td> <td>P23F</td> <td>P27F</td> <td>P31F</td> <td>P35F</td> <td>P39F</td> <td>P43F</td> <td>P47F</td> </tr> </tbody> </table>					Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	Power													CPU	64 points	64 points	64 points	64 points	64 points	64 points	64 points	64 points	64 points	64 points	64 points	64 points		P0	P40	P80	P120	P160	P200	P240	P280	P320	P360	P400	P440		P3F	P7F	P11F	P15F	P19F	P23F	P27F	P31F	P35F	P39F	P43F	P47F
Slot number:	0	1	2	3	4	5	6	7	8	9	10	11																																																										
Power																																																																						
CPU	64 points	64 points	64 points	64 points	64 points	64 points	64 points	64 points	64 points	64 points	64 points	64 points																																																										
	P0	P40	P80	P120	P160	P200	P240	P280	P320	P360	P400	P440																																																										
	P3F	P7F	P11F	P15F	P19F	P23F	P27F	P31F	P35F	P39F	P43F	P47F																																																										
I/O assignment (Variable)	<ul style="list-style-type: none"> I/O point is assigned automatically according to the installed module. I/O parameter is used to install modules. The starting number of base '0' is P0000. 16 points are assigned automatically to the slot of special or communication module Refer to the following figure regarding the I/O number assignment of 12 slots. <table border="1"> <thead> <tr> <th>Slot number:</th> <th>0</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> <th>9</th> <th>10</th> <th>11</th> </tr> </thead> <tbody> <tr> <td>Power</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>CPU</td> <td>16 points</td> <td>16 points</td> <td>32 points</td> <td>64 points</td> <td>16 points</td> <td>32 points</td> <td>32 points</td> <td>64 points</td> <td>32 points</td> <td>16 points</td> <td>32 points</td> <td>32 points</td> </tr> <tr> <td></td> <td>P00</td> <td>P10</td> <td>P20</td> <td>P40</td> <td>P80</td> <td>P90</td> <td>P110</td> <td>P130</td> <td>P170</td> <td>P190</td> <td>P200</td> <td>P220</td> </tr> <tr> <td></td> <td>P0F</td> <td>P1F</td> <td>P3F</td> <td>P7F</td> <td>P8F</td> <td>P10F</td> <td>P12F</td> <td>P16F</td> <td>P18F</td> <td>P19F</td> <td>P21F</td> <td>P23F</td> </tr> </tbody> </table>					Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	Power													CPU	16 points	16 points	32 points	64 points	16 points	32 points	32 points	64 points	32 points	16 points	32 points	32 points		P00	P10	P20	P40	P80	P90	P110	P130	P170	P190	P200	P220		P0F	P1F	P3F	P7F	P8F	P10F	P12F	P16F	P18F	P19F	P21F	P23F
Slot number:	0	1	2	3	4	5	6	7	8	9	10	11																																																										
Power																																																																						
CPU	16 points	16 points	32 points	64 points	16 points	32 points	32 points	64 points	32 points	16 points	32 points	32 points																																																										
	P00	P10	P20	P40	P80	P90	P110	P130	P170	P190	P200	P220																																																										
	P0F	P1F	P3F	P7F	P8F	P10F	P12F	P16F	P18F	P19F	P21F	P23F																																																										


The standard I/O number assignment is 64 points. (Fixed)

XGI system configuration


Item	XGI-CPUH	XGI-CPUU																																																				
Max. expansion stage	7																																																					
Max. installation of module	96																																																					
Max. number of I/O point	1,536 (for 16point I/O module) 3,072 (for 32point I/O module) 6,144 (for 64point I/O module)																																																					
Max. expansion distance	15m																																																					
I/O assignment	<ul style="list-style-type: none"> 64 points are assigned to each slot of base regardless of installation of module. No limit in installation of special module Special module is controlled by function block and the memory assignment is done automatically Refer to the following figure regarding the I/O assignment of 12 slots <table border="1"> <thead> <tr> <th>Slot number:</th> <th>0</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> <th>9</th> <th>10</th> <th>11</th> </tr> </thead> <tbody> <tr> <td>Power</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>CPU</td> <td>16 points</td> <td>16 points</td> <td>32 points</td> <td>64 points</td> <td>16 points</td> <td>32 points</td> <td>32 points</td> <td>64 points</td> <td>32 points</td> <td>16 points</td> <td>32 points</td> <td>32 points</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p> $\%I \times 0.8.0 \sim 31$ $\%Q \times 0.9.0 \sim 15$ $\%Q \times 0.10.0 \sim 31$ $\%Q \times 0.11.0 \sim 31$ </p>		Slot number:	0	1	2	3	4	5	6	7	8	9	10	11	Power													CPU	16 points	16 points	32 points	64 points	16 points	32 points	32 points	64 points	32 points	16 points	32 points	32 points													
Slot number:	0	1	2	3	4	5	6	7	8	9	10	11																																										
Power																																																						
CPU	16 points	16 points	32 points	64 points	16 points	32 points	32 points	64 points	32 points	16 points	32 points	32 points																																										

Expansion system composition

1. The following figure is the example of expansion system with the fixed I/O point type of XGK-CPUH.
2. The address of I/O point is adjustable by XG5000 parameter.

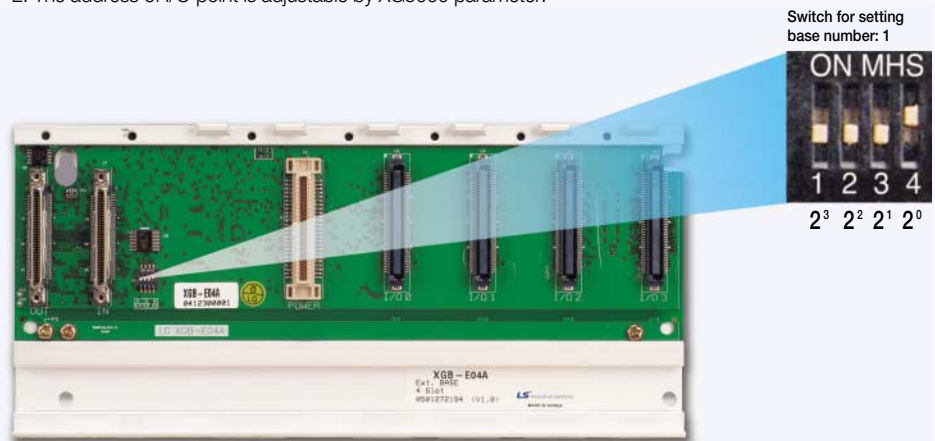

The lowest expansion base should be connected to the upper stage with expansion terminator(XGF-TERA).

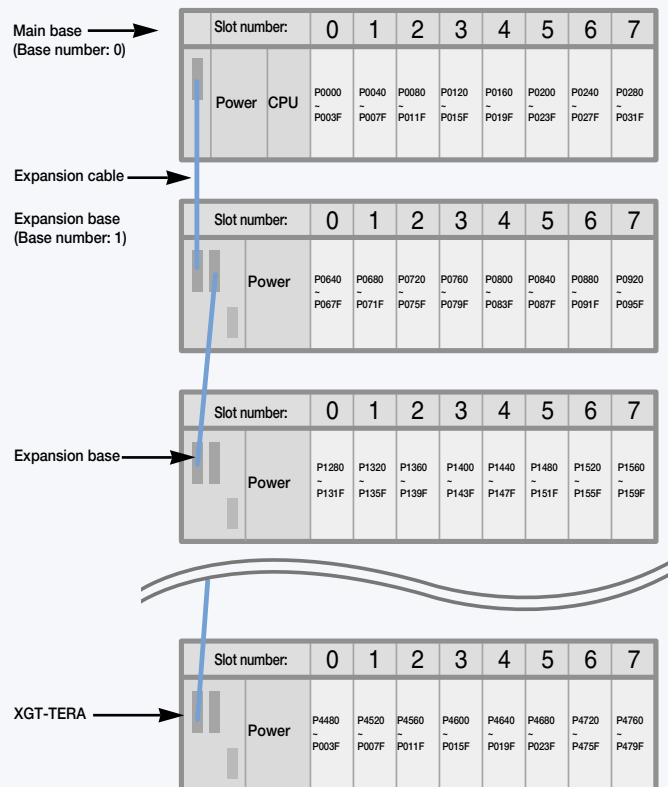

XGT-TERA should be installed at the end of the last expansion base.

Features

- 8, 16, 32, 64 points I/O module
- Operation monitoring by LED display
- Easy maintenance: Terminal block type, one-touch installation of module



Input module specifications




Input type		DC input						AC input		
Type		XGI-D21A	XGI-D22A	XGI-D22B	XGI-D24A	XGI-D24B	XGI-D28A	XGI-D28B	XGI-A12A	XGI-A21A
Input point		8	16		32		64		16	8
Rated input voltage		DC24V						AC100~120V	Free voltage	
Rated input current		4mA						8mA	17mA	
ON voltage/current		19V or more / 3mA or less						AC80V or more / 5mA or less	AC130V or more / 10mA or less	
OFF voltage/current		DC11V or more / 1.7mA or less						AC30V or more / 1mA or less	AC60V or more / 2mA or less	
Response	Off→On	1ms/5ms/10ms/20ms/70ms (set by CPU parameter) Initial value: 3ms						15mA or less		
	On→Off	1ms/5ms/10ms/20ms/70ms (set by CPU parameter) Initial value: 3ms						25mA or less		
Common (COM)		8 points/COM	16 points/COM		32 points/COM		16 points/COM	8 points/COM		
Insulation method		Photocoupler								
Current consumption (mA)		20	30		50		60	30	20	
Weight (Kg)		0.1	0.12		0.1		0.15	0.13	0.13	

Output module specifications

Input type		Relay			Transistor				Triac		
Type		XGQ-RY1A	XGQ-RY2A	XGQ-RY2B	XGQ-TR2A	XGQ-TR2B	XGQ-TR4A	XGQ-TR4B	XGQ-TR8A	XGQ-TR8B	XGQ-SS2A
Output point		8	16		16		32		64		16
Rated load voltage		DC12/24V, AC110/220V				DC12/24V				AC110/220V	
Rated output current	1 point	2A			0.5A		0.1A				0.6A
	Common	5A			4A		2A				4A
Response time	Off→On	10ms or less			1ms or less				1ms or less		
	On→Off	12ms or less			1ms or less				0.5cycle +1ms or less		
Common (COM)		1 point/COM	16 points/COM		32 points/COM				16 points/COM		
Insulation method		Relay			Photocoupler						
Current consumption (mA)		260	500		70		130		230		300
Weight (Kg)		0.13	0.17	0.19	0.11		0.1		0.15		0.2
Surge killer		-			Varistor		Zener diode				Varistor
External power supply		-			DC				-		




Note) B1, B2 of 32, 62 points terminal (connector) are shorted inside of the product.

Wiring diagram for input modules

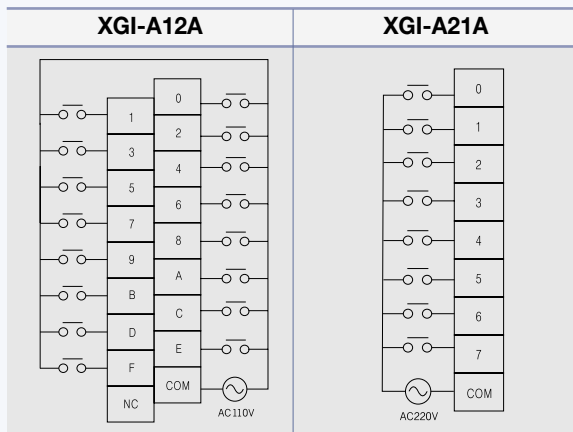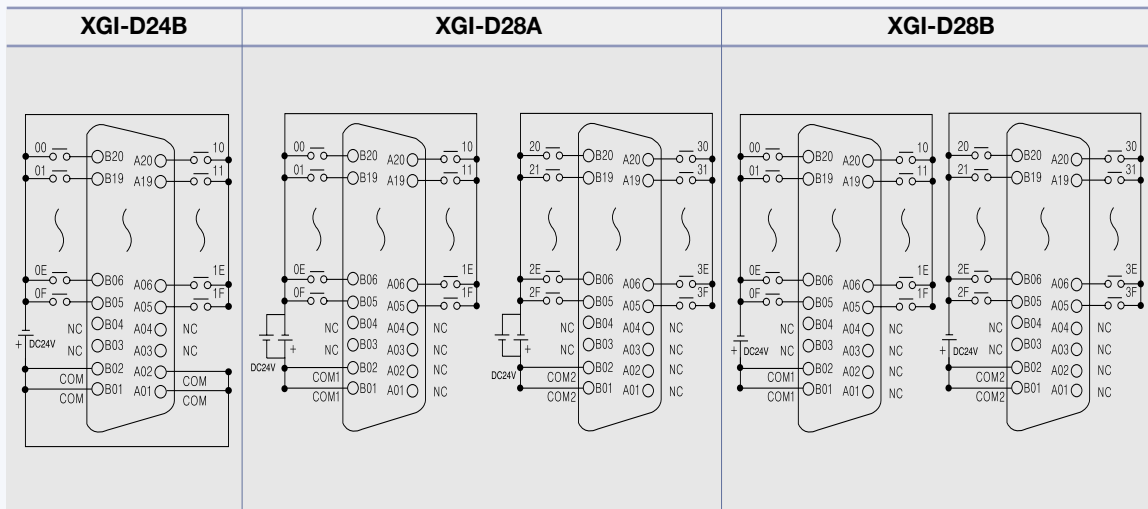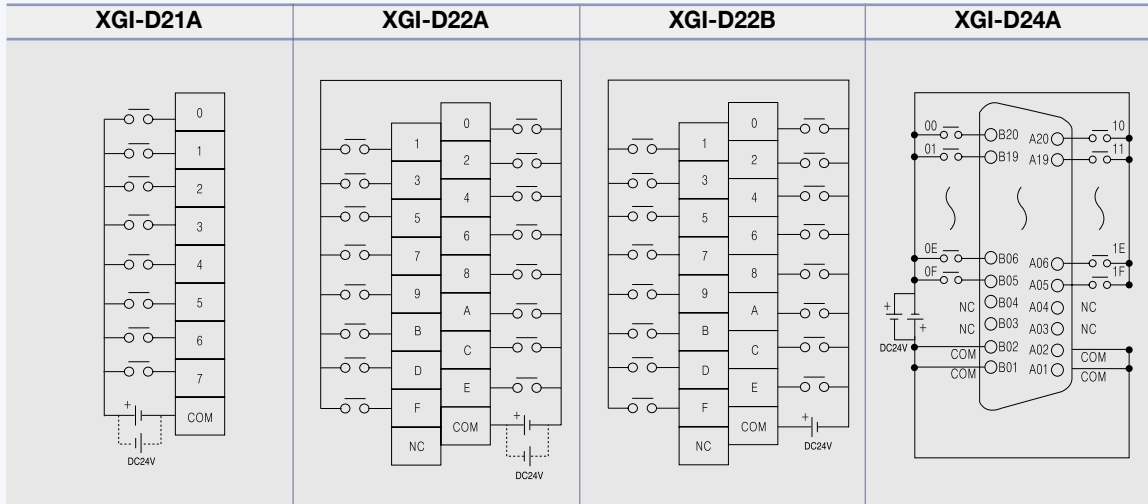

Wiring diagram for output modules


CPU

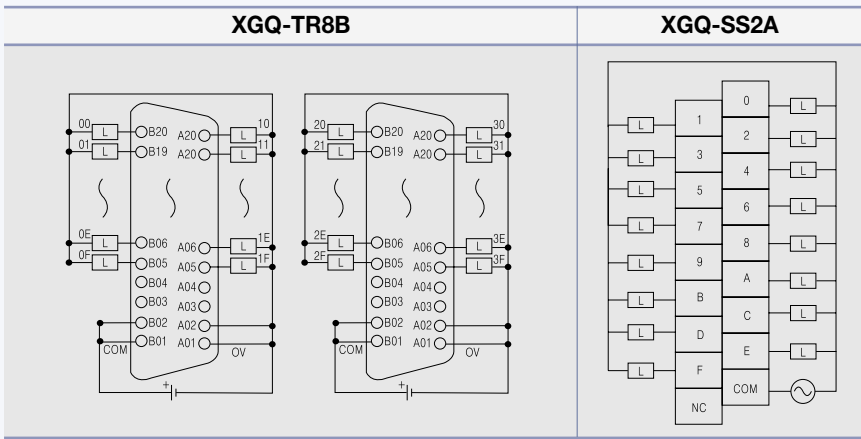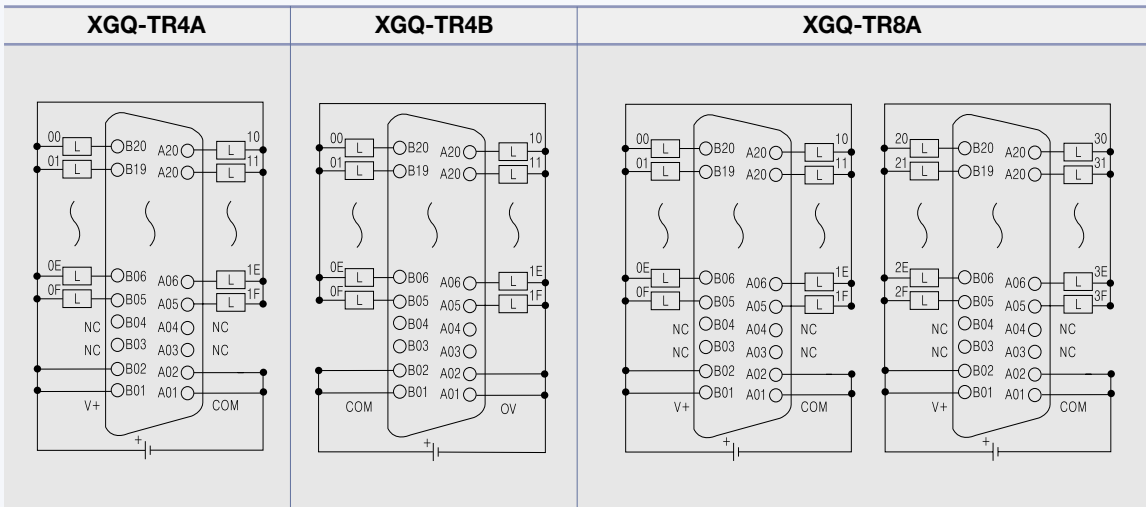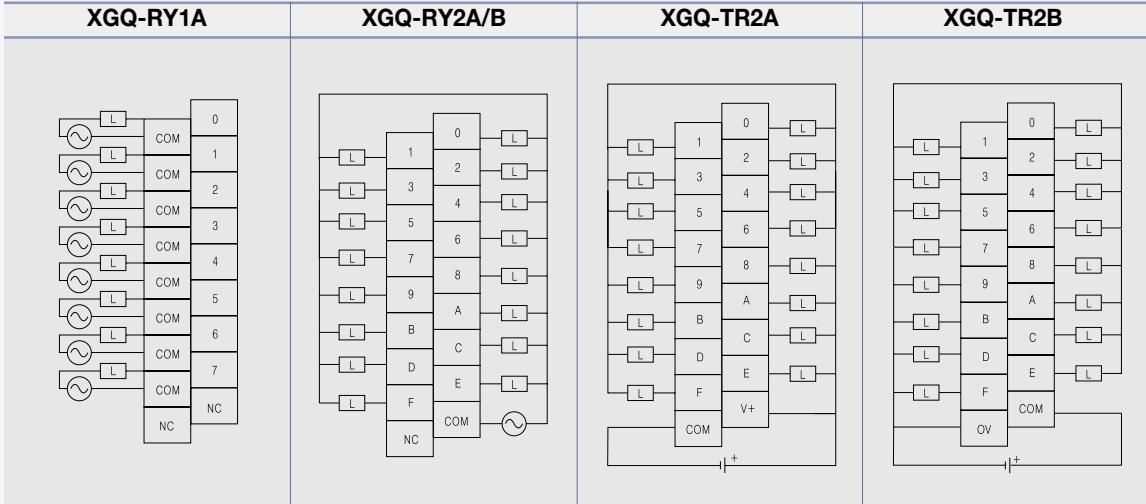

Input/output mixed type (XGH-DT4A)

Input		Output	
Input points	16 points	Input points	16 points
Insulation method	Photo coupler	Insulation method	Photo coupler
Rated input voltage	DC24V	Rated input voltage	DC12/24V
Rated input current	4mA	Rated input current	DC10.2~26.4V
Input voltage range	DC20.4~28.8V	Input voltage range	0.1A/point, 1.6A/COM
Insulation pressure	AC560Vrms / 3Cycle	Insulation pressure	0.1mA or less
On voltage/current	DC19V or more / 3mA or more	On voltage/current	0.7A/10ms or less
Off voltage/current	DC11V or more / 1.7mA or more	Off voltage/current	Zener diode
Input resistance	5.6 kΩ	Input resistance	DC 0.2V or less
Response	Off→On (Setting by CPU parameter) Initial value: 3ms	Response	Off→On 1ms or less
	On→Off (Setting by CPU parameter) Initial value: 3ms		On→Off 1ms or less (rated load, resistance load)
Common (COM)	16 points/COM		
Operation display	LED lighting when output is ON		
Internal current consumption	100mA		
External connection	40-point connector		
Weight (kg)	0.1		


Wiring diagram for mixed type

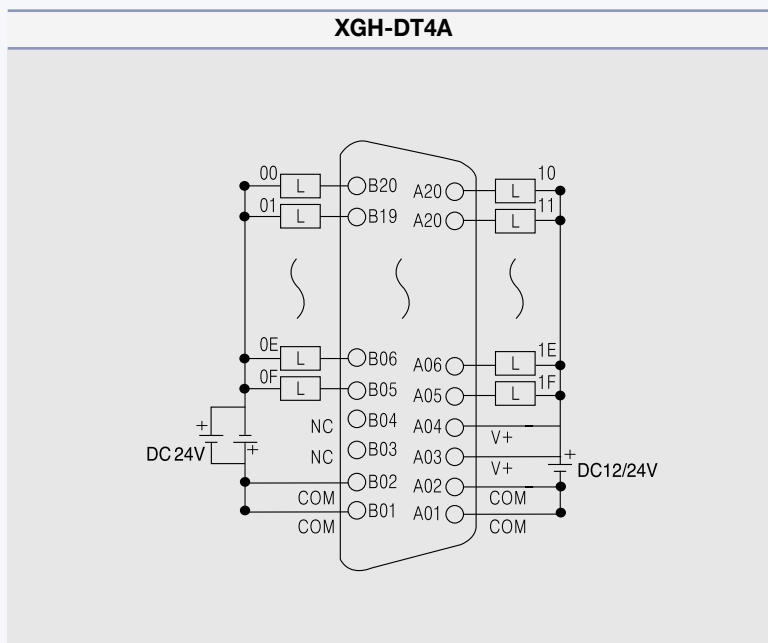

* Input address for XGK CPU is P00~P0F and Output address is P10~P1F when it is installed on the slot 0.
 Input address for XGI CPU is %IX0.0.0~%IX0.0.15 and Output address is %QX0.0.16~%QX0.0.31


Precaution during installation of I/O module

- XGT has 2 kinds of digital input type: Current sink input, Current source input. For DC input module has different wiring depending on the input type, digital input type should be selected with consideration about connected input device.
- Max. number of simultaneous input point differs according to the module type. Therefore, review specification of input module before its application.
- Use an interrupt module when a response of high-speed input is demanded. But only one interrupt module can be installed per CPU module.
- If switching frequency is high or inductive switching load is used, the lifespan of relay output module will be reduced. Therefore, it is recommended to use transistor output module or triac output module.
- When driving an inductive load with output module, set the maximum switching frequency as 'ON' for 1 second and 'OFF' for 1 second.
- When using counter or timer with DC/DC converter, it is possible to have inrush current which cause a break down. Therefore to reduce an effect of inrush current, connect resistor or inductor to load or use the module whose max. load current is high.

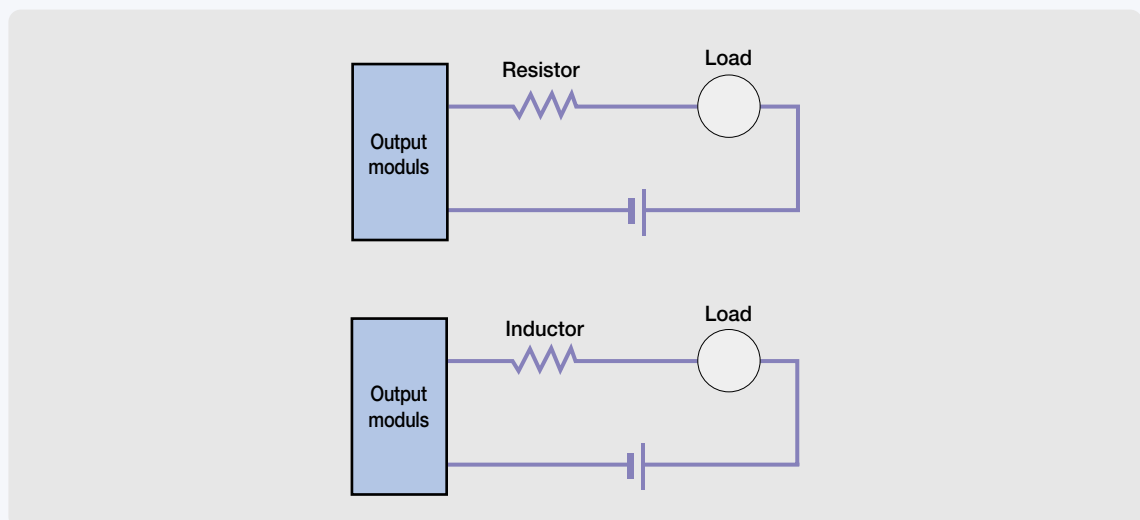


- Fuse of output module is not exchangeable to prevent a damage of external wiring when output module has a short-circuit.
- The number of simultaneous 'ON' points varies depending on input voltage, ambient temperature. Refer to the specification of input module.

- The following graph presents the relay lifespan of relay output module. It shows the maximum lifespan of relay which is used in the relay output.

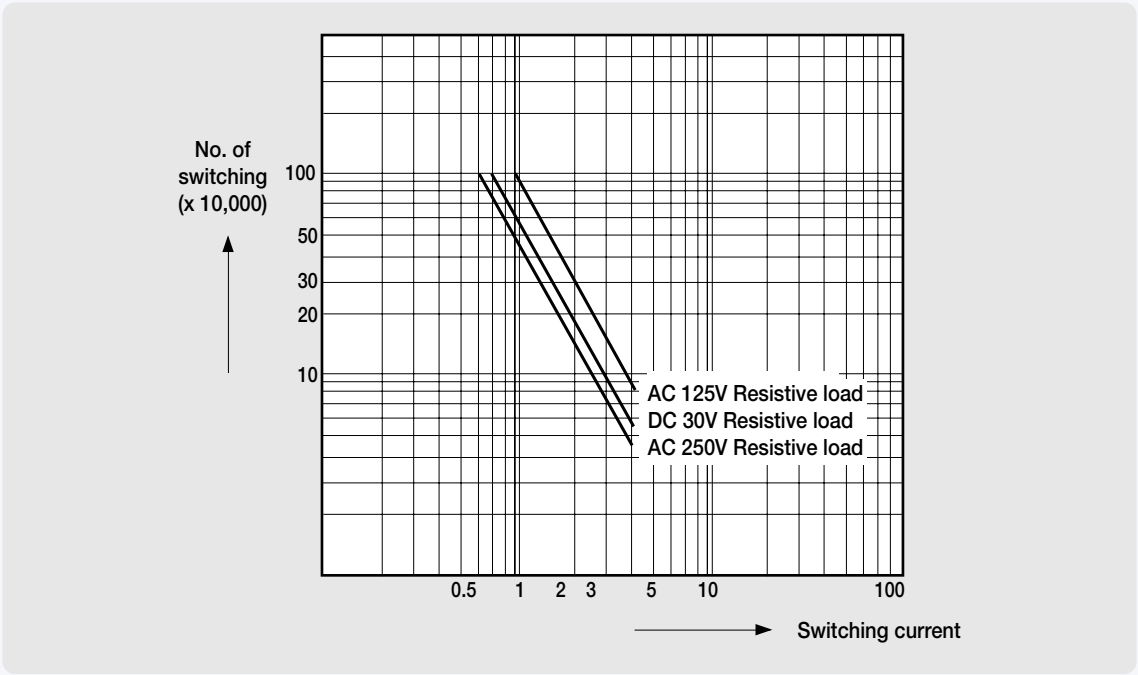

- Compressed terminal attaching sleeve cannot be mounted to XGT terminal block. The following picture shows appropriate compressed terminals for terminal block.

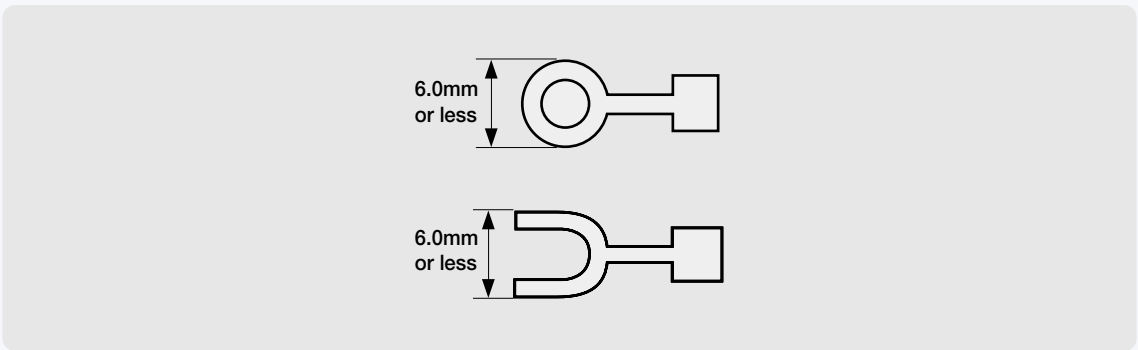

- Use 0.3~0.75mm² twisted pair, below 2.8mm thickness cable for connecting to terminal block.
- Be careful when choosing and using the cable since the permissible current differs according to the insulation thickness.
- Joint torque of fixed screw and terminal block screw of the module needs to be within the range in the following table.

Joint	Joint torque range
I/O module terminal block screw (M3)	42~58 N · cm
I/O module terminal block fixed screw (M3)	68~89 N · cm

- Thermal protector is built in transistor module. Thermal protector is a function that protects PLC from an overload and overheating.



XGR



Redundancy system

Redundancy system for high-speed process control based on IEC



- Processing speed: 42ns/step
- I/O Points: Max. 131,072
- Total memory: 32MB (Program 7MB, Data 2MB, Reserved 7MB, Flash 16MB)
- Switching over time: 50ms
- Built-in 256 PID loops control



High performance

- Processing speed: 42ns/step
- CPU synchronization via fiber optic cable
- I/O Points: Max. 131,072
- Total memory: 32MB (Program 7MB, Data 2MB, Reserved 7MB, Flash 16MB)
- Switching over time: 50ms

Easy expansion installation using network

- Max. 31 expansion base
Distance: Fiber 2km (Max. expansion 60km), Twisted pair 100m (Max. expansion 3km)
- Program upload and download via expansion base
- No limit to install the communication master on the expansion base

Enhanced maintenance via system history and network ring configuration

- Convenient system analyze using Operation history, Error history, System history
- Ring configuration to prevent a line disconnection error
- Network monitoring, Protocol monitoring function
- Error channel monitoring via flag
- Graphic display for the system configuration
- Safe module exchange via Wizard

IEC 61131-3 Standard language

- LD, ST, SFC, IL (read only)
- Program configuration and data type based on IEC

Variety of communication function

- Easy interface using Open network (Ethernet, Profibus-DP, DeviceNet, RS-232C, RS-422/485, etc)
- Max. 24 communication module installation on the expansion base (High speed link 12, P2P 8)
- Network diagnosis via network and frame monitoring
- PLC link via dedicated communication base on Ethernet (RAPIEnet)

Variety of input and output module

- 8 / 16 / 32 / 64 points (8 / 16 points Relay output)
- Input / Output / Mixed module

Enhanced analog function

- Enable to install the analog module on the expansion base (Max. 250, Analog input 139)
- Insulated type and Temperature module
- Easy to set the parameter via I/O parameter and flag
- Debugging function via special module monitoring

Integrated programming & engineering environment


- XG5000 : Easy to program, various monitoring functions and enhanced editing function
- XG-PD : Convenient setup for communication and network parameter
- XG-PDAPM software package: Software package for positioning module

XGR Configuration

- Base, Power, CPU, Network redundancy
- Dual port and 3 kinds of media (Twisted-Twisted, Optic-Optic, Twisted-Optic)




System

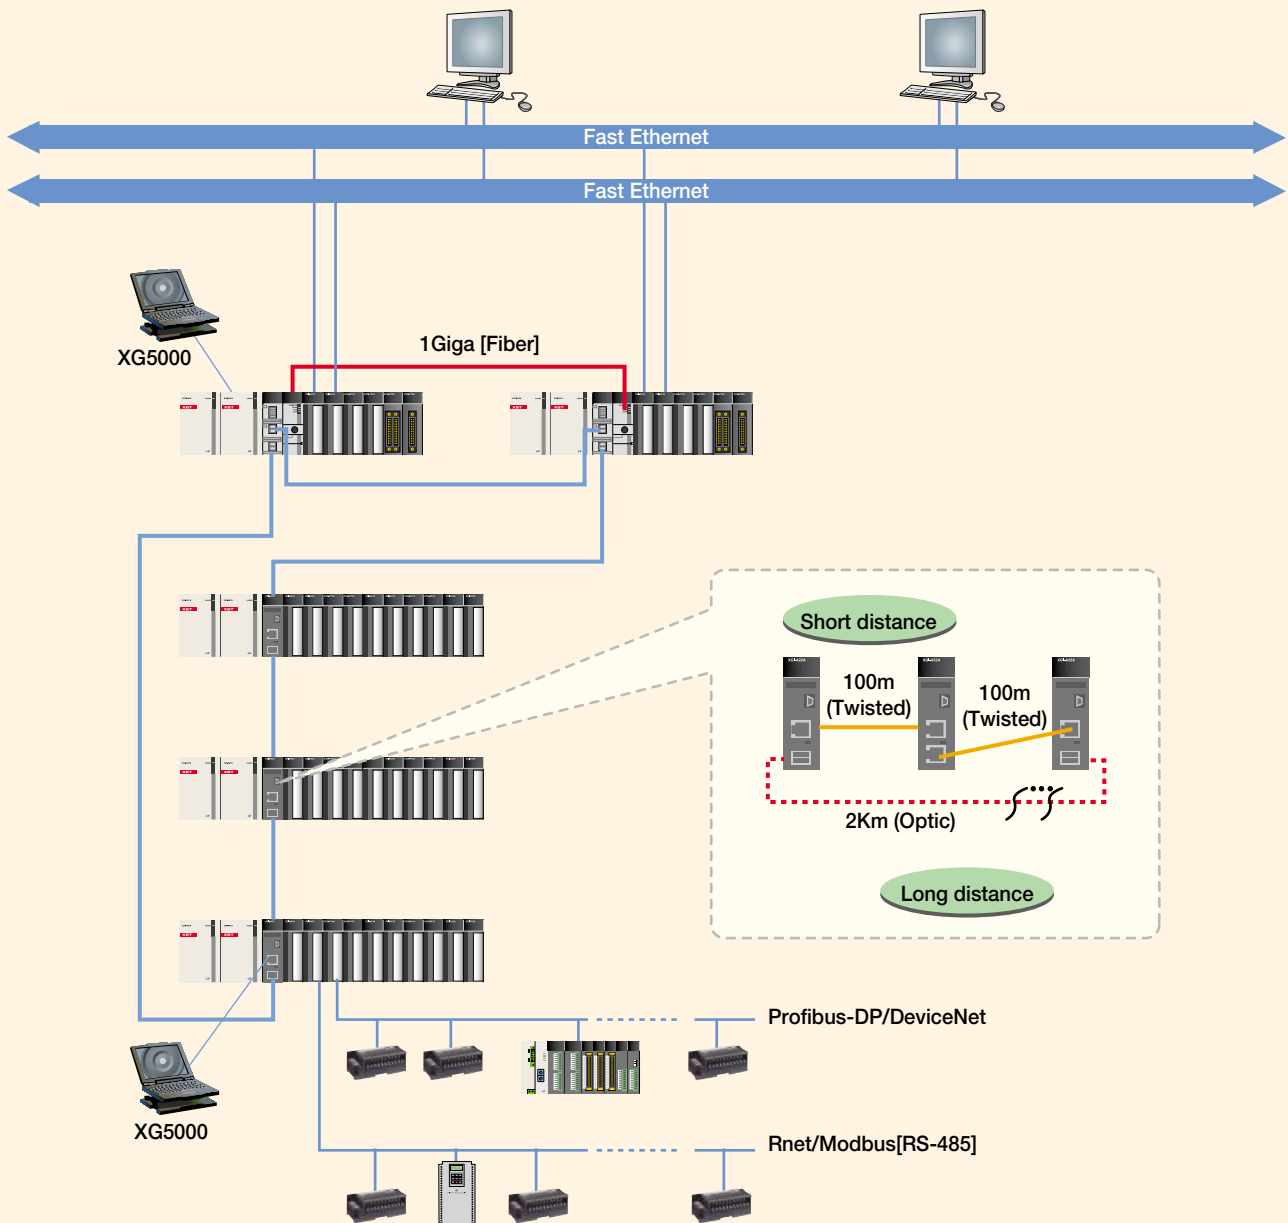

Redundancy system / System configuration method

System configuration

Fiber-optic

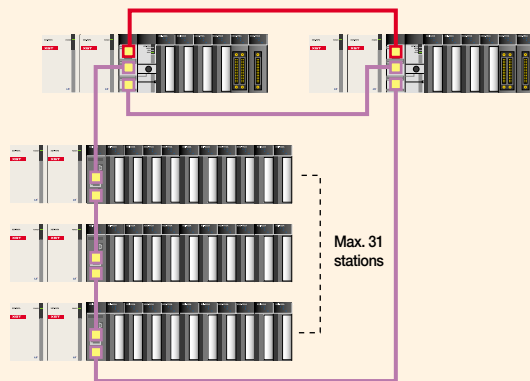

XGR-CPUH/F


- Main CPU
- Fiber optic: Max. distance 2Km



XGR-DBSF

- Expansion drive module
- Fiber optic: Max. distance 2Km (Installed on the expansion base)
- Max. 31 stations

Twisted pair

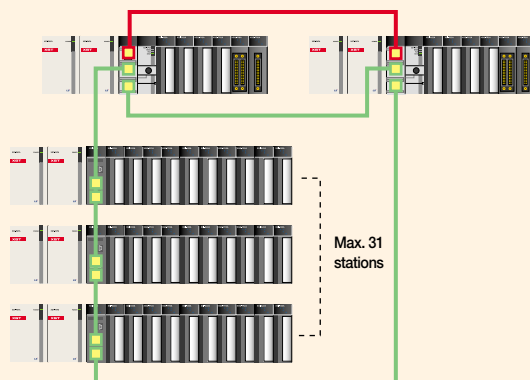

XGR-CPUH/T


- Main CPU
- Twisted fair: Max. distance 100m



XGR-DBST

- Expansion drive module
- Twisted fair : Max. distance 100m (Installed on the expansion base)
- Max. 31 stations

Hybrid (Twisted pair + Fiber Optic)

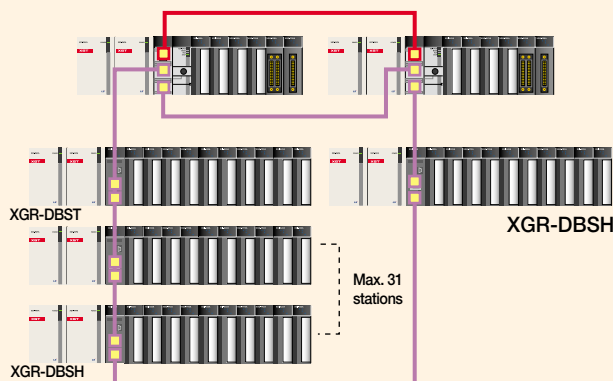

XGR-CPUH/T XGR-CPUH/F

- Main CPU
- Fiber optic: Max. distance 2Km
- Twisted fair: Max. distance 100m





XGR-DBSH


- Expansion drive module
- Fiber optic: Max. distance 2Km
- Twisted fair: Max. distance 100m (Installed on the expansion base)
- Max. 31 stations

* Max. expandable distance: Fiber optic 60km, Twisted fair 3km
 * CPU synchronization cable: 2m, 5m

System configuration

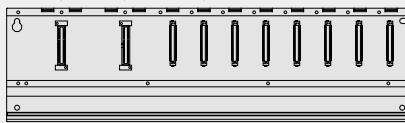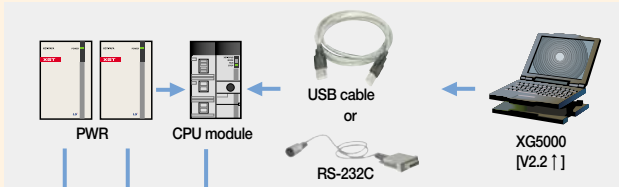



Main base [A Side] XGR-M06P

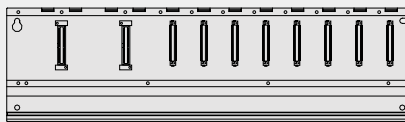

Main base [B Side] XGR-M06P

Main base

- 2 types of CPU (Fiber optic, Twisted fair)
- Power: AC110V, AC220V
- 6slot base: enable to install 6 communication modules

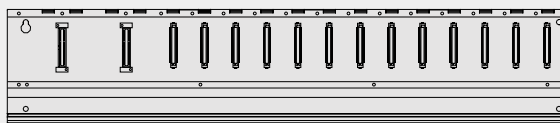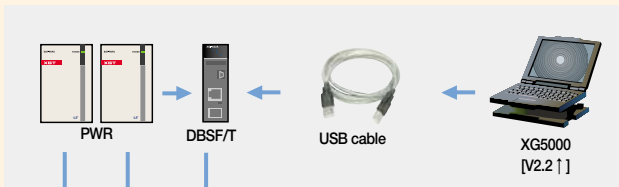

Expansion base XGR-E12P

Expansion base

- Power: 8.5A/AC110V, 8.5A/AC220V
- Expansion drive: Fiber optic, Twisted fair, Hybrid
- EFM* and EIM*: not available with 12slot base

CPU module	
Type	I/O point
XGR-CPUH/T [Twisted fair]	131,072 points
XGR-CPUH/F [Fiber optic]	

Type	I/O point
USB-301A	USB downloading cable
K1C-050A	RS232C downloading cable
XGC-F201	CPU synchronization cable: 2m
XGC-F501	CPU synchronization cable: 5m

Power	
Type	I/O point
XGR-AC12	110V 5.5A (Main base)
XGR-AC13	110V 8.5A (Expansion base)
XGR-AC22	220V 5.5A (Main base)
XGR-AC23	220V 8.5A (Expansion base)

CPU module	
Type	I/O point
XGI-CPUU/XGI-CPUH	6,144 (IEC type)
XGK-CPUU/CPUH	6,144
XGK-CPUA	3,072
XGK-CPUS	3,072
XGK-CPUE	1,536

Item	Type	Description
USB cable	USB-301A	USB downloading cable
RS-232C cable	K1C-050A	RS-232C downloading cable

Power module			
AC	Free Voltage	XGP-ACF1	DC5V 3A DC24V 0.6A
		XGP-ACF2	DC5V 6A
DC	220V	XGP-AC23	DC5V 8.5A
		XGP-DC42	DC5V 6A

Item	Input module		
	AC110V	AC220V	DC24V
8 points	-	XGI-A21A	XGI-D21A
16 points	XGI-A12A	-	XGI-D22A
	-	-	XGI-D22B
32 points	-	-	XGI-D24A
	-	-	XGI-D24B
64 points	-	-	XGI-D28A
	-	-	XGI-D28B

Item	Output module		
	Relay	Triac	Transistor
8 points	XGQ-RY1A	-	-
16 points	XGQ-RY2A	XGQ-SS2A	XGQ-TR2A
	XGQ-RY2B	-	XGQ-TR2B
32 points	-	-	XGQ-TR4A
	-	-	XGQ-TR4B
64 points	-	-	XGQ-TR8A
	-	-	XGQ-TR8B

Item	Input/Output mixed module	
	16-point DC input	16-point TR output

Special module		
Analog input	XGF-AV8A	Voltage input type, 8Ch
	XGF-AC8A	Current input type, 8Ch
	XGF-AD8A	Voltage/ Current input, 8Ch
	XGF-AD4S	Voltage/ Current input, 4Ch (Isolated)
Analog output	XGF-AD16A	Voltage/ Current input, 16Ch
	XGF-AW4S	2-wire, Voltage/ Current input, 4Ch (Isolated)
	XGF-DV4A	Voltage output type, 4Ch
	XGF-DC4A	Current output type, 4Ch
	XGF-DV8A	Voltage output type, 8Ch
	XGF-DC8A	Current output type, 8Ch
Analog Input/Output	XGF-DV4S	Voltage output, 4Ch (Isolated)
	XGF-DC4S	Current output, 4Ch (Isolated)
High-speed counter	XGF-AH6A	Input: 4ch, Voltage/ Current Output: 2Ch Voltage/ Current
	XGF-HO2A	Pulse (OC) input type, 2Ch
Positioning	XGF-HD2A	Pulse (LD) input type, 2Ch
	XGF-P01A-P03A	Open collector, 1-3axis
	XGF-P01A-P03A	Line drive, 1-3axis
	XGF-P01H-P04H	Open collector, 1-4axis
Temperature control	XGF-P01H-P04H	Line drive, 1-4axis
	XGF-TC4S	Thermocouple input, 4Ch
	XGF-RD4A	RTD input, 4Ch
Temperature controller	XGF-RD4S	RTD input, 4Ch (Insulated)
	XGF-TC4UD	Temperature controller, 4 loops, Universal input
Event input	XGF-SOEA	DC24V, 32points

Communication module		
RAPIEnet	XGL-EIMT	RAPIEnet Twisted fair 2Ch
	XGL-EIMH	RAPIEnet Fiber optic/Twisted fair 1Ch
	XGL-EIMF	RAPIEnet Fiber optic 2Ch
	XOL-EIMT	RAPIEnet Twisted fair 2Ch For PC
Cnet	XOL-EIMF	RAPIEnet Fiber optic 2Ch For PC
	XGL-CH2A	RS-232C/RS-422
	XGL-C22A	RS-232C, 2Ch
Ethernet (Open)	XGL-C42A	RS-422, 2Ch
	XGL-EFMF	Fiber optic, Master, SC type
	XGL-EFMT	Twisted pair, Master, RJ-45
	XGL-ESHF	Fast Ethernet, Industrial Ring module
Ethernet (Dedicated)	XGL-EHST	Fast Ethernet, Switching hub
	XGL-EDMF	Fiber optic, Master, SC type
EtherNet/IP	XGL-EDMT	Twisted pair, Master, RJ-45
Rnet	XGL-EIPT	Industrial Ethernet, 2ports
DeviceNet	XGL-RMEA	Rnet, Master, TP
Profibus-DP	XGL-DMEA	DeviceNet, Master
Fnet	XGL-PMEA	Profibus-DP, Master
	XGL-FMEA	Dedicated network

Specification

Item	Description		Remark
	XGR-CPUH/F	XGR-CPUH/T	
Media	Fiber optic	Twisted pair	
Operation method	Cyclic execution, Periodic operation, Interrupt operation, Fixed scan		
I/O control method	Scan synchronized batch processing method (Refresh method)		
Program language	LD (Ladder Diagram), ST (Structured Text), SFC (Sequential Function Chart), IL (Read only)		
Number of Instructions	Operator	18	
	Standard function	130 + Real type function	
	Standard function block	41	
	Special function/ function block	Special function block, Process control function block	
Processing speed	LD	0.042 μ s/Step	
	MOV	0.126 μ s/Step	
	Real type	\pm : 0.602 μ s(S), 1.078 μ s(D) x : 1.106 μ s(S), 2.394 μ s(D) \div : 1.134 μ s(S), 2.66 μ s(D)	S: Real type D: Long real type
I/O points	23,808 points (31 stage *12 slot *64 points)		
I/O memory	I: 131,072 points, Q: 131,072 points (Total: 1131,072)		
DRAM	Program memory	7MB	Including Upload, Parameter, System area
	Data memory	2MB	
	Reserved memory	7MB	
Flash memory	16MB		*Battery back-up memory: 8MB
Data memory	Direct variable	256k Byte	
	Auto allocated variable	512k Byte	
	Timer	No limitation, Range: 0.001sec ~ 4,259,967.295sec (1,193hours)	
	Counter	No limitation, Range: -32,768 ~ +32,767	
	Flag	System: 4k Byte Communication: 64k Byte Special: 2k Byte (32 base, 16 slot, 32 channel)	L, N area U area: Analog device area R area: read/write (Command, XG5000)
File register	64k Byte *2		
Program	Number of program blocks	256	
	Initial task	1 (_INT)	
	Cycle task	32	
	Internal device task	32	
Operation mode	RUN, STOP, DEBUG		
Restart mode	Warm, Cold		
Self diagnostic functions	Watchdog timer, Memory error, I/O error, Battery error, Power Supply error		
Program download	RS-232C (1CH), USB (1CH)		
Data retain	Auto allocated variable: set by variable definition Direct variable: set by parameter		
Max. expansion base	31 stages		


Specification

Item	Hardware	Remark
CPU module	2 slot / Fiber, Twisted fair	
Expansion drive module	1 slot / Fiber, Twisted fair, Hybrid	
Base	Main base: 6 slot, Expansion base: 12 slot	
Power	AC110V	5V-5.5A
	AC220V	5V-5.5A
	AC110V	5V-8.5A
	AC220V	5V-8.5A
Expansion method and Max. expansion base	31 stages by network	
Base number setting	Rotary switch of expansion drive module	
Distance between expansion bases	Twisted fair: 100m (3km), Fiber: 2km (60km)	
Master/Standby switching over time	50ms or less	


Available modules for each base

	Base	Available modules
1	Main base	CPU, Ethernet module (XGL-EFMx), RAPIEnet module (XGL-EIMx) * x: T (Twisted fair), F (Fiber optic), H (Hybrid)
2	Expansion base	I/O modules for XGI (Ethernet based communication module should be installed on Main base Number of communication module: 12 for High-speed link, 8 for P2P Number of analog module: Analog input (139), Analog output (250)


Water power generation or Dam door control

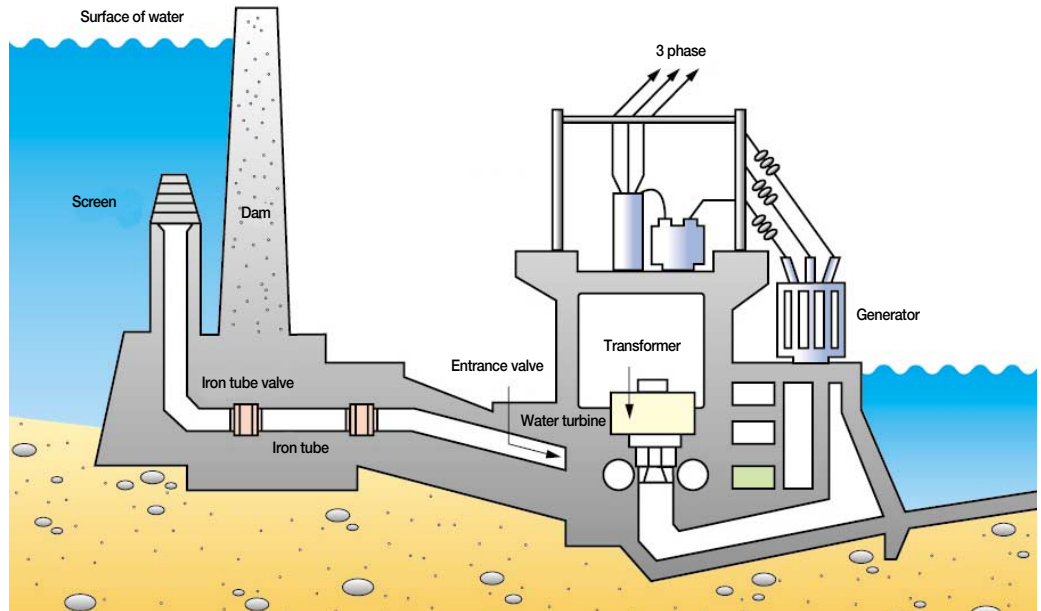

System configuration

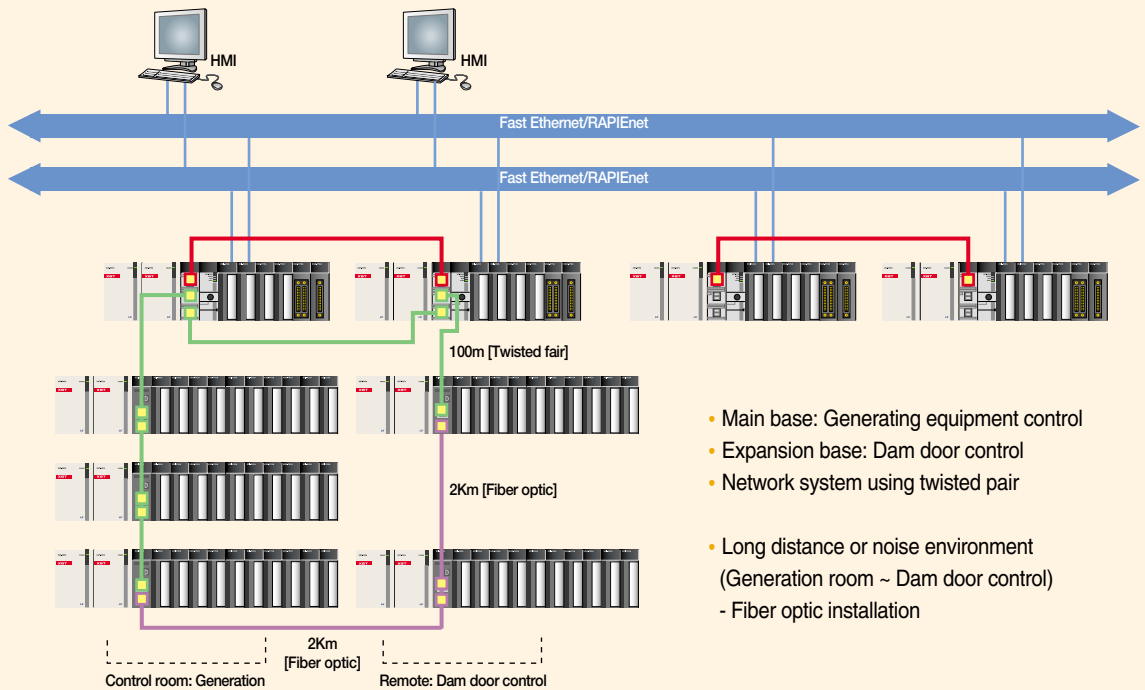


Generating boiler control

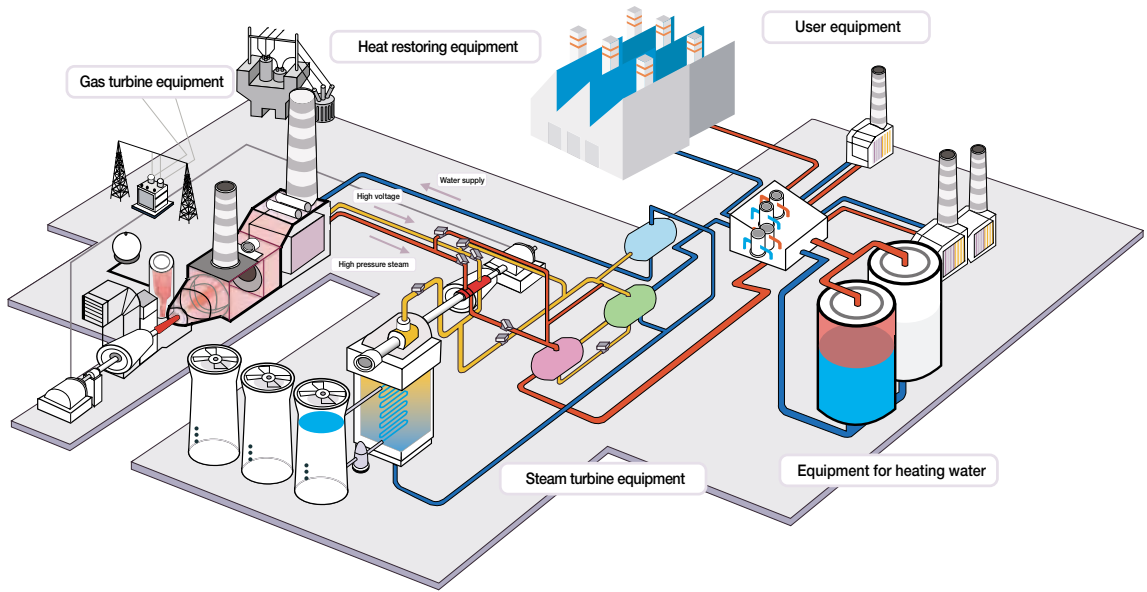


System


System configuration

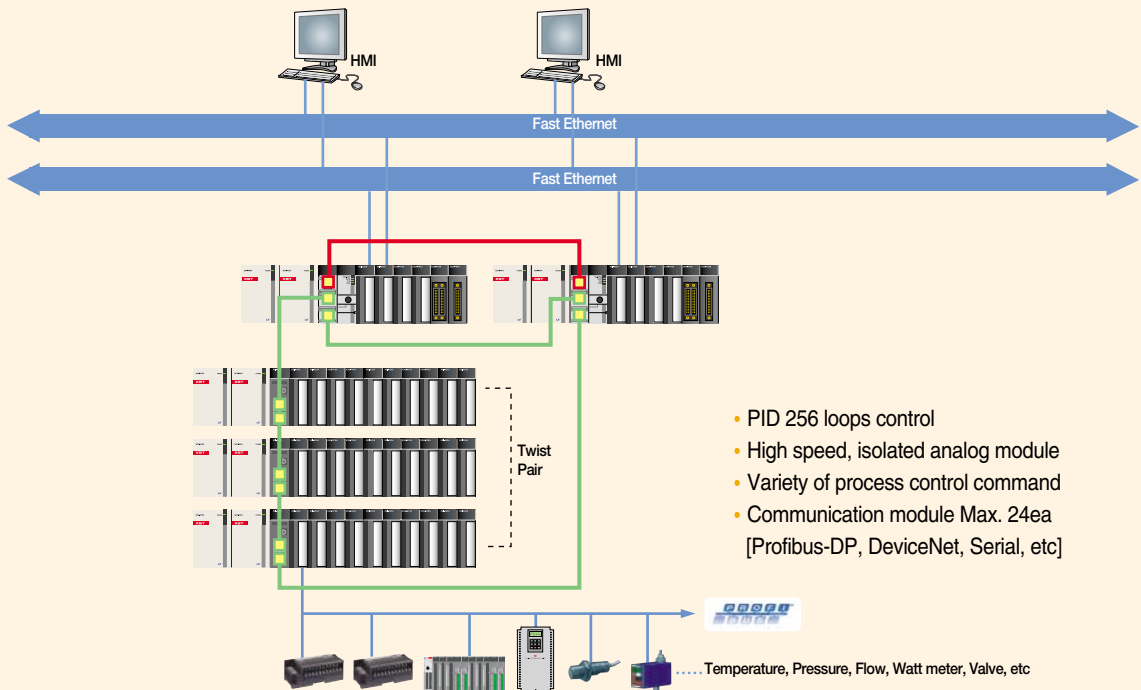


Stage control

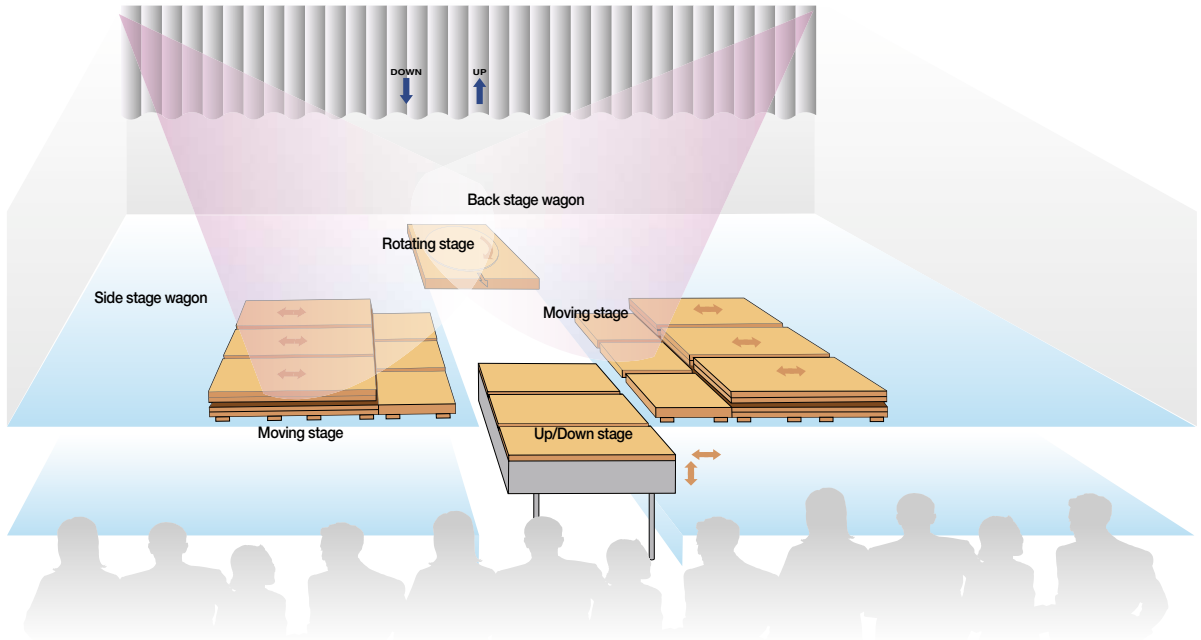


System configuration

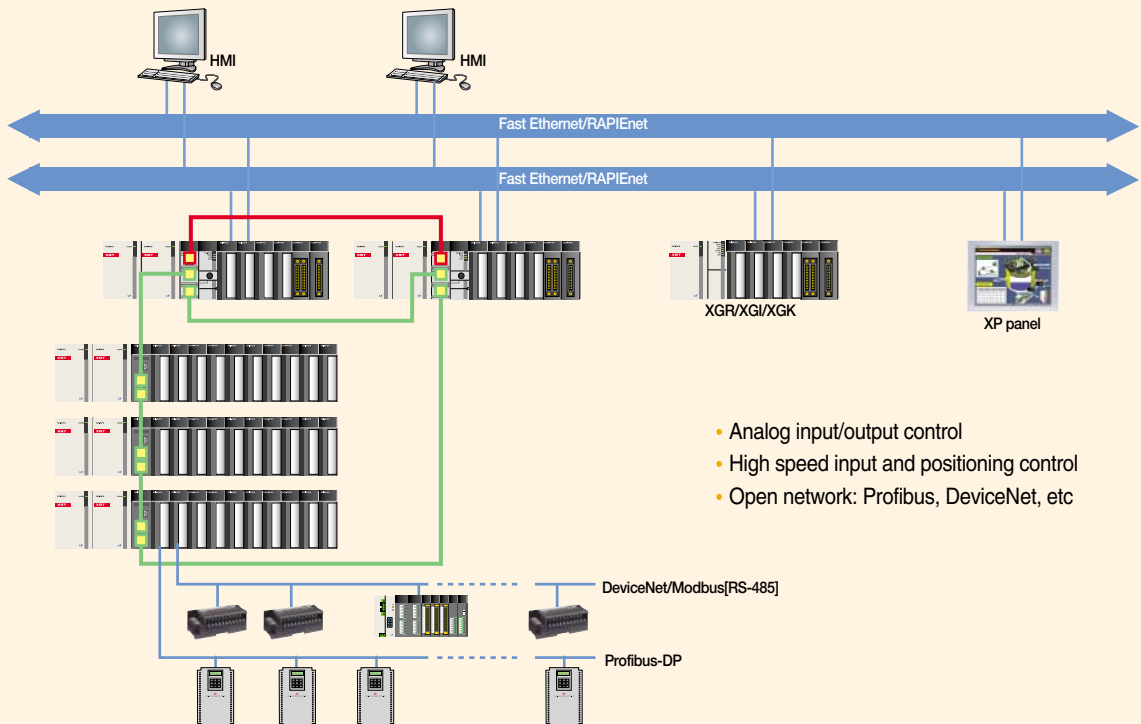


Water processing control

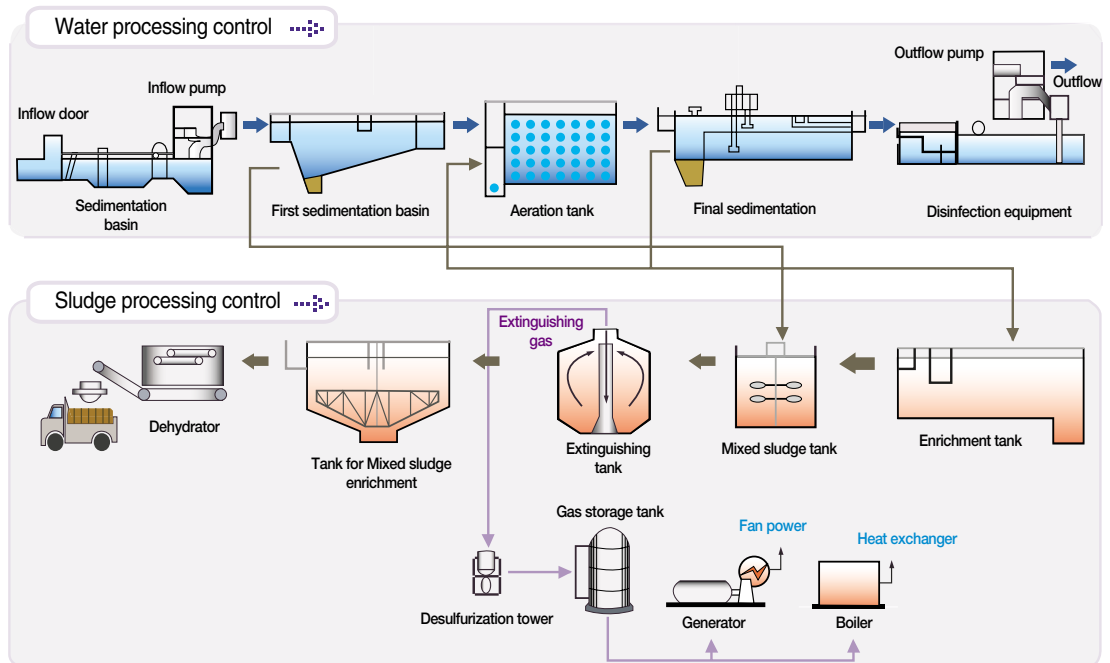


System configuration

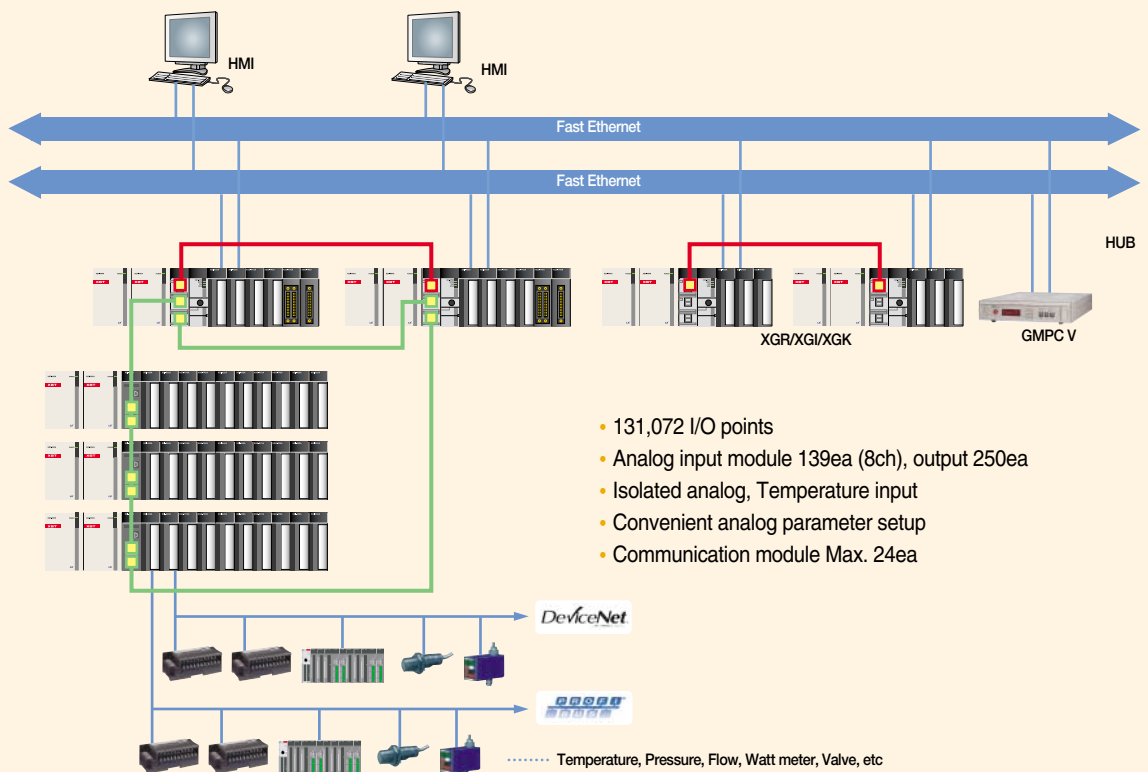


Incinerator control

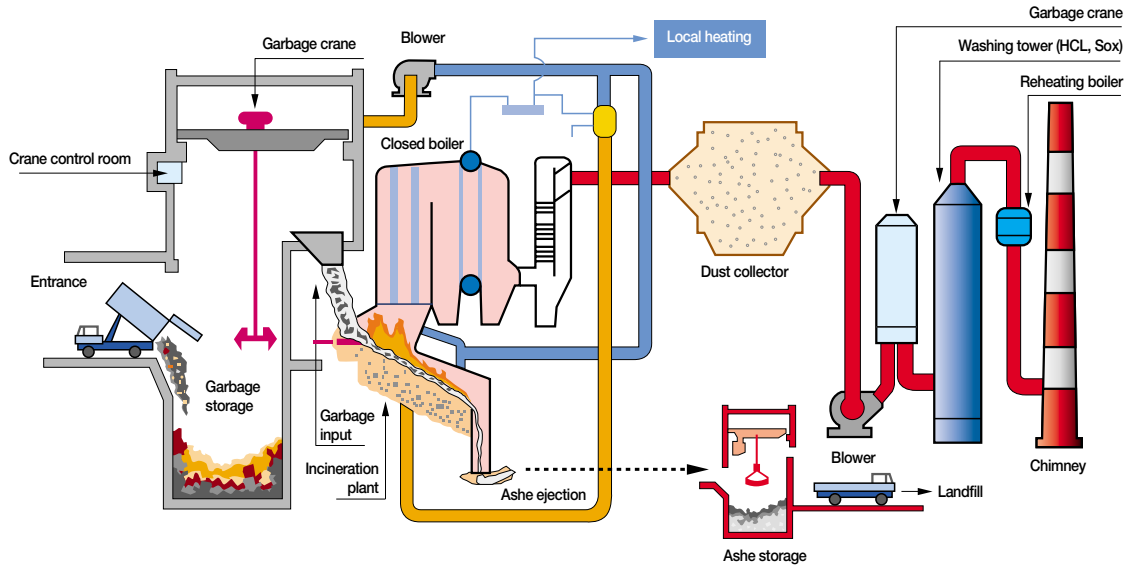


System configuration

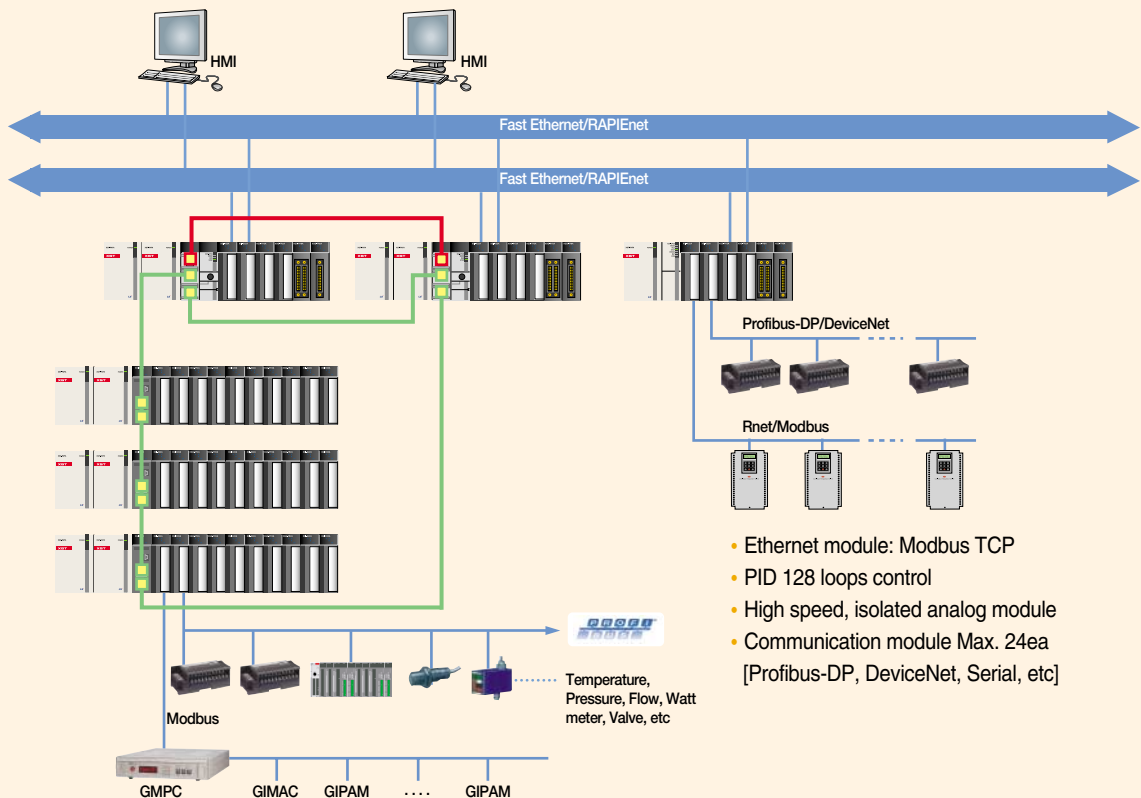

Broad casting system

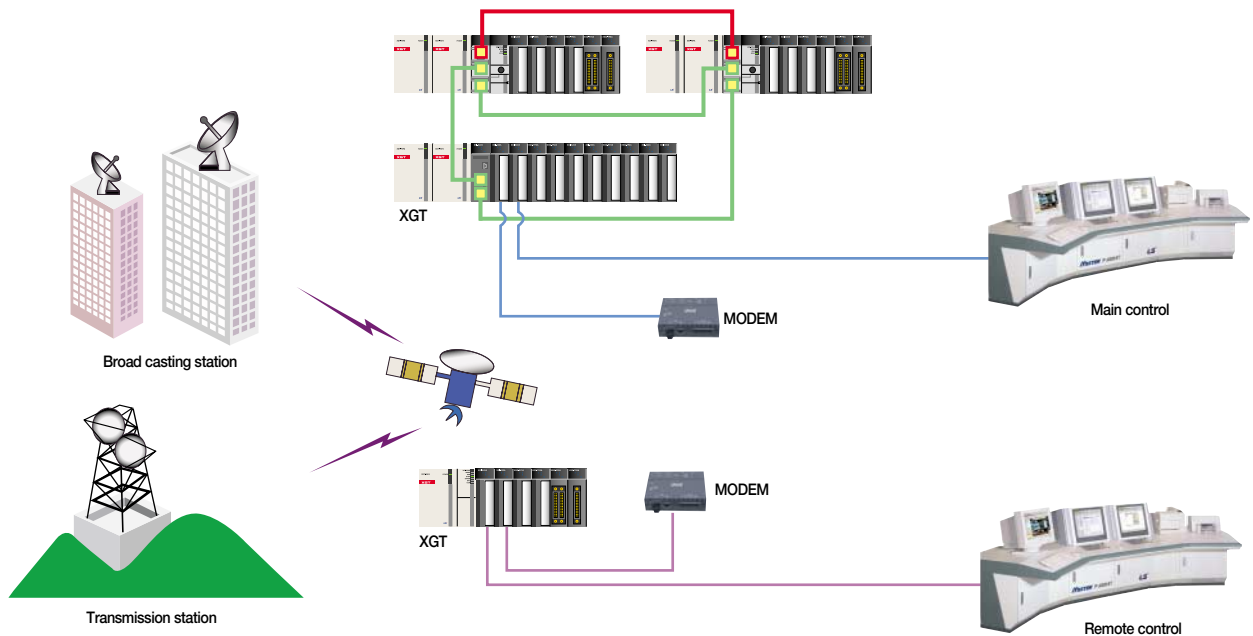

System configuration

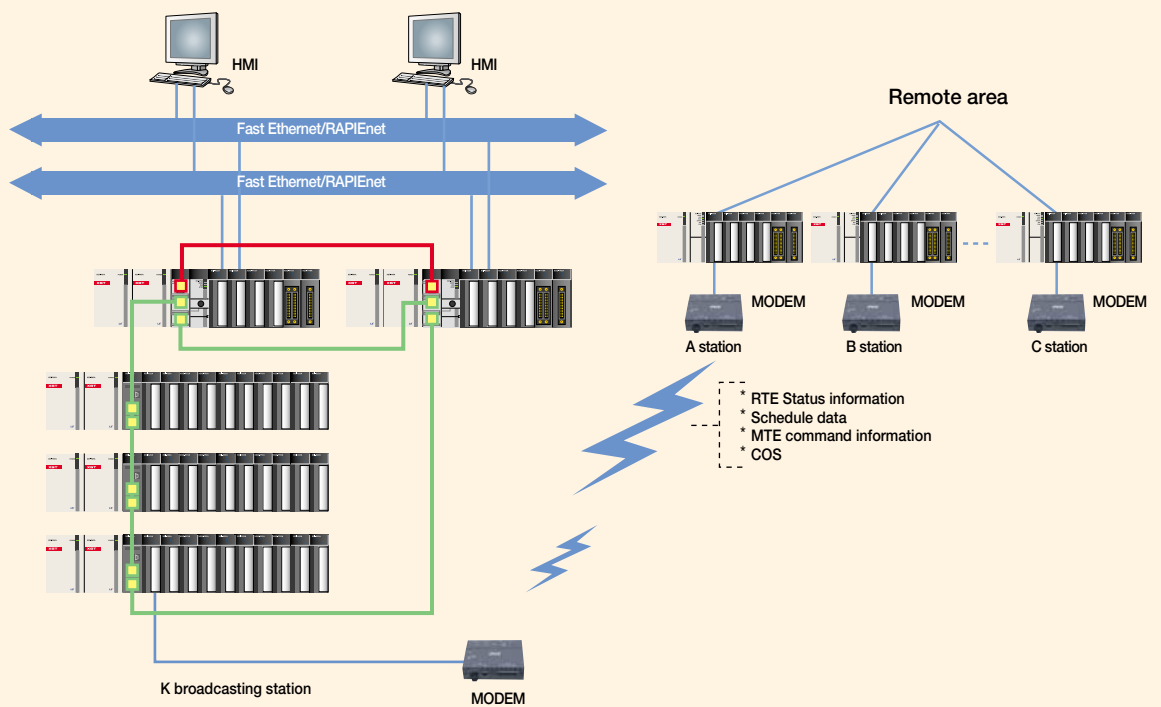



Network

Network

Along with Ethernet, Profibus-DP, and DeviceNet, XGT series provide the maximum in control integration and communication flexibility.





XGT



RAPIenet

- Communication speed: 100Mbps
- Dual port [T.Pair/F.Optic/Hybrid]
- Built-in high performance industrial switch
- Cyclic Communication[Broadcast Service]
 - 1block:200word
 - Send 64block / Receive 128block
- Event Communication[Peer to Peer Service]



XGT Fnet

- Dedicated network for LS PLC
- Easy high-speed link parameter setup
- 1Mbps high-speed communication
- Max. 750m
- Max. 6ea repeater available (Max. expansion 5.25km)
- Network management through Auto scan



XGT Fast Ethernet (FEnet)

- 10/100Mbps Industrial high-speed Ethernet
- 10/100Base-TX, 100Base-FX (Optical)
- Open Ethernet (FEnet) and LSIS dedicated Ethernet (FDEnet)
- High reliability and performance with 32-bit processor
- Various connection to MMI S/W (XGT, MODBUS/TCP)



XGT Rnet

- Communication speed: 1Mbps
- Communication distance: Max. 750m
- Max. 6 repeaters (up to 5.25km)
- Network management using Auto-scan (Slave module information)



XGT Ethernet / IP

- EtherNet/IP Conformance Test Suite Version 2.10
- 100BASE-TX/100Mbps full duplex
- No additional switch or hub (built-in switch)
- Wiring reduction and flexible installation
- Auto cross over function
- Various diagnostic function and network status information



XGT Dnet (DeviceNet)

- Connectable to other PLCs and devices
- Compliance of the ODVA standard
- Flexible communication speed setting: 125/250/500Kbps
- Multi-drop and T branch connection
- Communication distance: Max. 500m
- Convenient parameter setting through SyCon/HS link parameter



XGT Cnet


- RS-232C/485/422 communication
- Long-distance communication via modem connection
- Various connection to MMI S/W (XGT, MODBUS RTU, MODBUS ASCII)
- User-defined communication support
- Convenient P2P master (XGT, MODBUS)



XGT Pnet (Profibus-DP)

- Optimum communication for a master automation device and distributed slave I/O devices
- Fast slave communication omitting application layer
- Communication distance: Max. 1200m
- Convenient parameter setting through SyCon/HS link parameter

Features

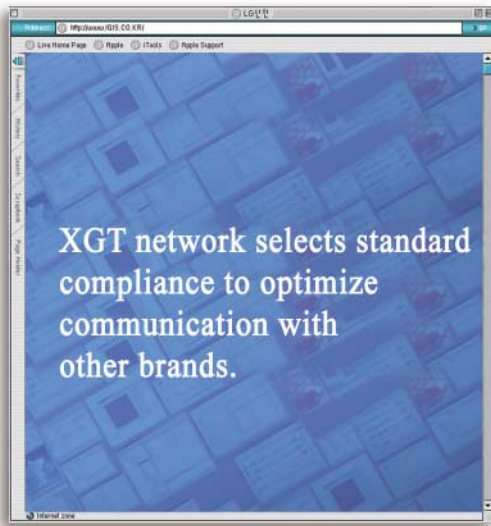

RAPIenet


- Communication speed: 100Mbps
- Dual port (T.Pair / F.Optic / Hybrid)
- Built-in high performance industrial switch
- Cyclic Communication (Broadcast Service)
 - 1block:200word
 - Send 64block / Receive 128block
- H/W based Dual port Full duplex Switching
- Real-time / Non real-time service

XGT Fast Ethernet

- 10/100Mbps Industrial high-speed Ethernet
- 10/100Base-TX, 100Base-FX (Optical)
- Open (Information level) Ethernet: FEnet
 - LSIS dedicated (Between LS PLCs) Ethernet: FDEnet
- High reliability and performance with 32-bit processor
- Various connection to MMI S/W (XGT, MODBUS)
- Enhanced network diagnosis

XGT Ethernet / IP

- EtherNet/IP Conformance Test Suite Version 2.10
- 100BASE-TX/100Mbps full duplex
- No additional switch or hub (built-in switch)
- Wiring reduction and flexible installation
- Auto cross over function
- Various diagnostic function and network status information

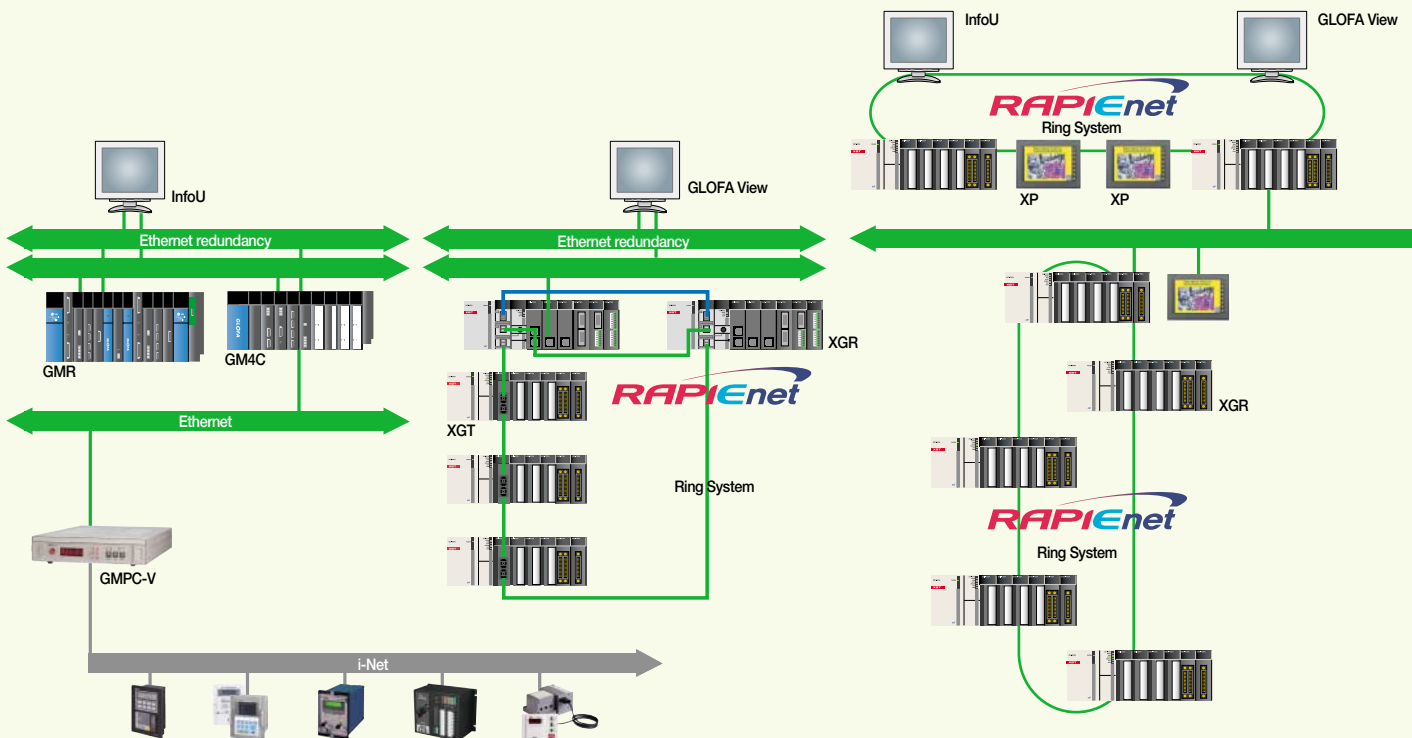

XGT Cnet

- RS-232C/485/422 communication
- Long-distance communication via modem connection
dedicated line modem connection
- Various connection to MMI S/W
(XGT, MODBUS RTU, MODBUS ASCII)
- User-defined communication
- Convenient P2P master (XGT, MODBUS)

XGT Fnet

- Dedicated network for LS PLC
- Easy high-speed link parameter setup
- 1Mbps high-speed communication
- Max. 750m
- Max. 6ea repeater available (Max. expansion 5.25km)
- Network management through Auto scan

XGT Rnet

- High-speed communication: 1Mbps
- Long communication distance: Max. 750m
- Max. 6 repeaters (up to 5.25km)
- Network management using Auto-scan
(Slave module information)

XGT Dnet (DeviceNet)


- Connectable to other PLCs and control device
- Compliance of the ODVA standard
- Flexible communication speed setting: 125/250/500Kbps
- Multi-drop and T branch connection
- Long communication distance: Max. 500m

XGT Pnet (Profibus-DP)

- Optimum communication for a master automation device
and distributed slave I/O devices
- Fast slave communication omitting application layer
- Long communication distance: Max. 1200m
- Communication using High-speed link parameter

No. of network module available

Item	XGK / XGI / XGR CPU
Total network module	24
High-speed link module	12
P2P service	8

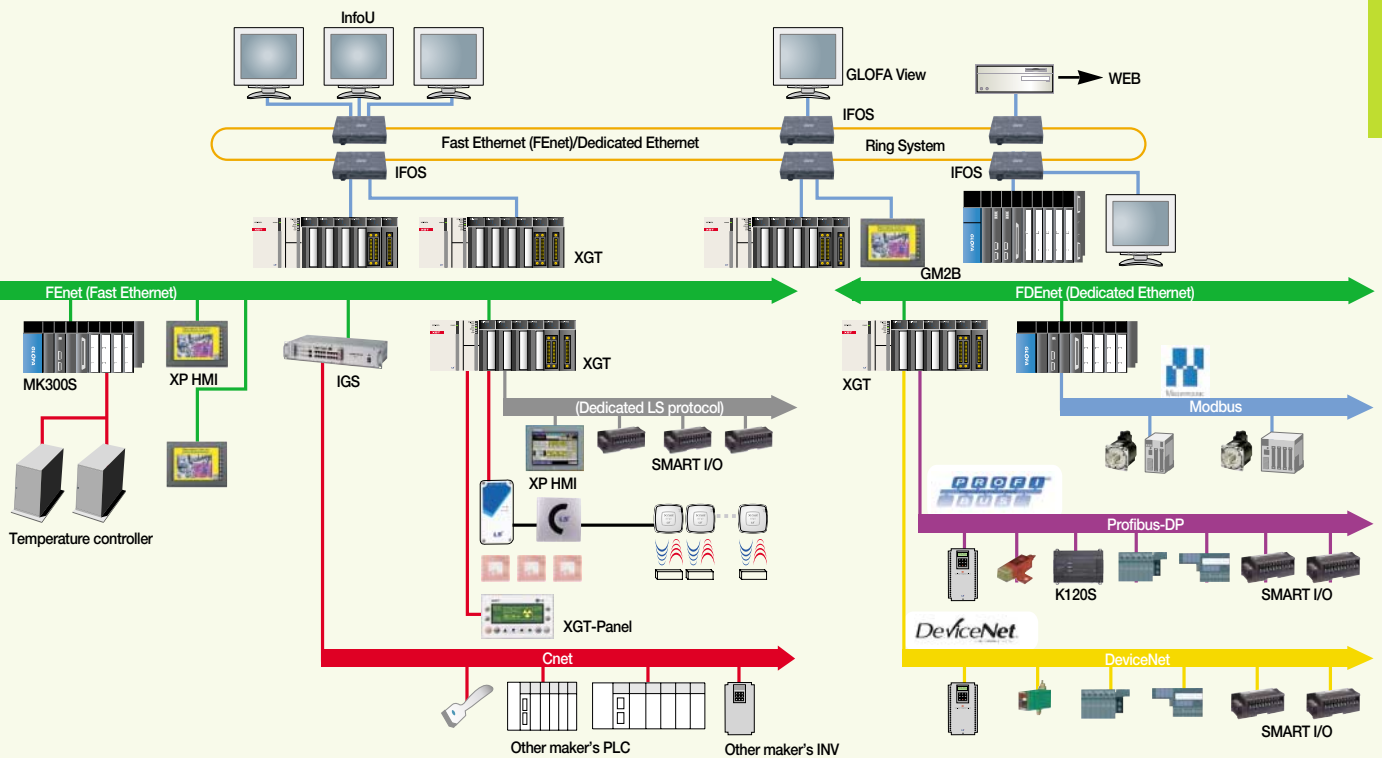



Features

100Mbps Dual Port Ethernet


- Communication speed: 100Mbps
- Dual port (T.Pair / F.Optic / Hybrid)
- Built-in high performance industrial switch
- Cyclic Communication (Broadcast Service)
 - 1block: 200word
 - Send 64block / Receive 128block
- Event Communication (Peer to Peer Service)

Hardware based Full duplex switching

- Dual port full duplex switching (Forwarding/Receiving)
- Real-time / Non real-time service (Frame)

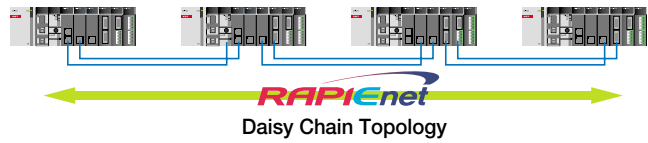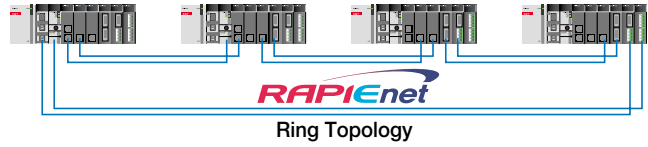


Redundancy System

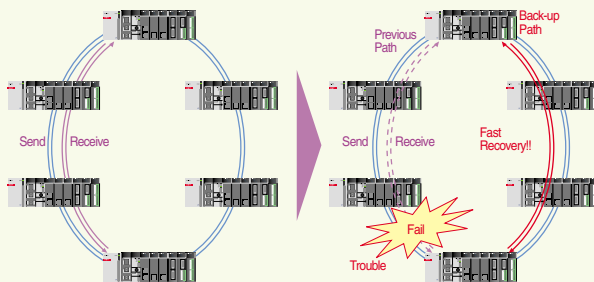


Hybrid System

- Twisted pair, Fiber optic, Hybrid(T.P+F.O)

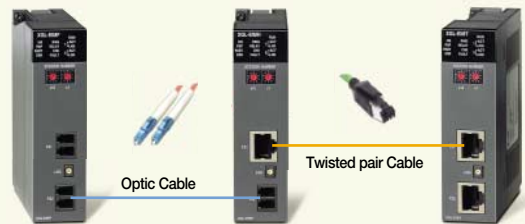

Intelligent Diagnostic Functions

- Alarm for station number collision
- Cable distance measurement (Twisted pair cable)
- Convenient wiring using auto cross over
- Various diagnosis and Network status information
 - (a) CPU status
 - (b) Communication module status
 - (c) Communication service (HS link, Dedicated service, P2P) status
 - (d) Auto scan function to supply module information within the network
 - (e) Packet and Data ring monitoring receiving to Communication module
 - (f) Module diagnosis via network

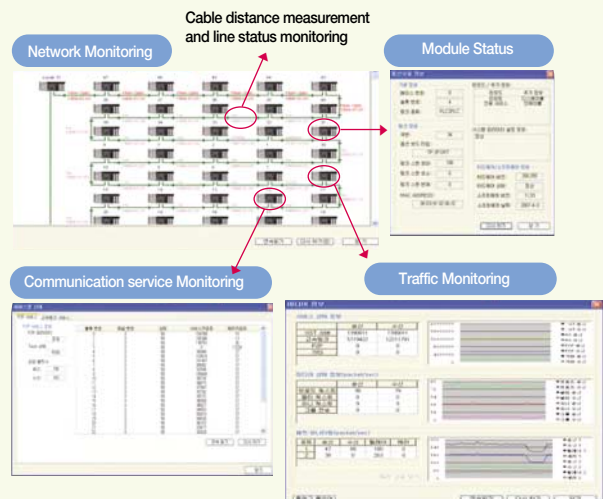

Specification


Item		Specification	
		100BASE-FX	100BASE-TX
Transmission	Transmission speed	100Mbps	100Mbps
	Media	Fiber optic	Twisted pair
	Transmission method	Base band	
	Topology	Daisy Chain, Ring topology	
	Distance (Node to node)	2 km	100 m
	Max. distance (Node to node)	128km	6,400m
	Max. Node	64 nodes	
	Max. Protocol	1,516 bytes	
	Media access method	CSMA/CD	
	Frame error check	CRC 32 = $X^2+X^6+X^9+...+X^2+X+1$	
Max. Number of installation	For PLC	12	
	For PC	1	
Mountable slot	For PLC	Main base ~ 7 th Expansion base (XGK-CPUH/XGI-CPUU)	
		Main base ~ 3 rd Expansion base (XGK-CPUS/CPUA)	
		Main base ~ 1 st Expansion base (XGK-CPUe)	
For PC	PCI slot		
	Communication method	P2P	High speed link
Communications device	Data block	Client / Server	Multicast, Unicast
	Data per block	700 word x 64Block	12,800 word
	PLC ↔ PLC	•	•
	PLC ↔ PC	Available soon	•
Fail Safe	Dual communication line	•	
	Recovery Time	Within 10m	
Network diagnosis	Bypass of the fail station	•	
	Cable distance measurement	•	
	Station number collision detection	•	
Dimension (mm)	For PLC	98(H) x 27(W) x 90(D)	
	For PC	18(H) x 120(W) x 174(D)	
Current consumption (mA)	For PLC	Twisted pair: 330, Fiber optic: 670, Mixed: 510	
	For PC	Twisted pair: 630, Fiber optic: 630	
Wight (g)	For PLC	Twisted pair: 102, Fiber optic: 109, Mixed: 105	
	For PC	Twisted pair: 104, Fiber optic: 128	



XGL-EIMF : Fiber optic 2ports
 XGL-EIMH : Twisted pair port/ Fiber optic 1 port
 XGL-EIMT : Twisted pair 2ports



XGL-EIMF : Fiber optic 2ports For PC

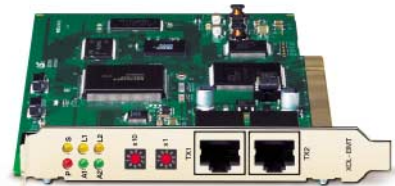


XGL-EIMT : Twisted pair 2ports For PC

Network


Redundancy rack type expansion system

- Built-in type for CPU (Redundancy CPU)
 - Max. 31 expansion base
- Easy installation
 - Base Auto scan
 - Analog module setup with I/O parameter
 - Easy programming for analog using global variable
 - Max. 24 communication module
- Long distance expansion (Fiber optic: 2km) and loader connection
- Twisted pair/ Fiber optic/ Mixed type communication modules for various system environment

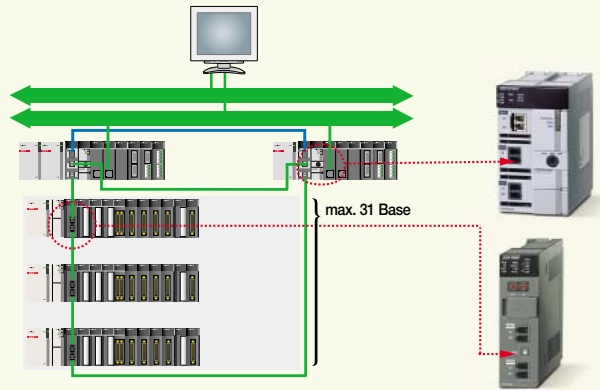


Controller Level communication

- XGK/XGI/XGR PLC2PLC communication
- Enable to configure Daisy chain without External switch
- Service periodic: within 5ms

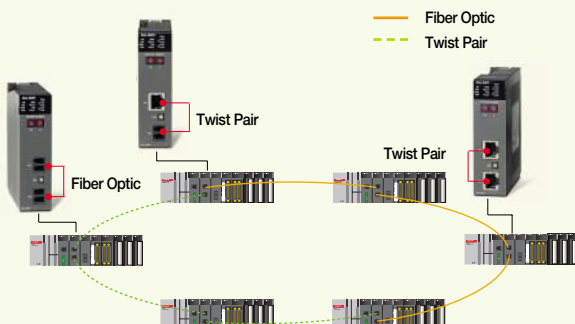


System configuration

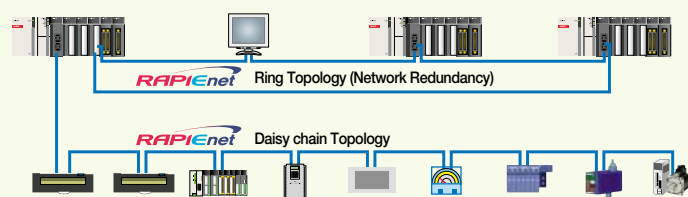

Features

- 10/100Mbps industrial high-speed Ethernet (IEEE802.3)
- High-speed link block (Send 32blocks, Receive 128blocks)
- 10/100Base-TX, 100Base-FX (Fiber optic)
- Open Ethernet and Dedicated protocol
- High performance by 32bit processor
- Remote connection via XG5000
- Module reset function
- Modbus TCP protocol
- Network diagnosis via auto scan
- Easy network configuration and setup via XG-PD
- User defined protocol and P2P service
- PING Test function
- Communication information for services
(High speed link, Dedicated service, Media status)

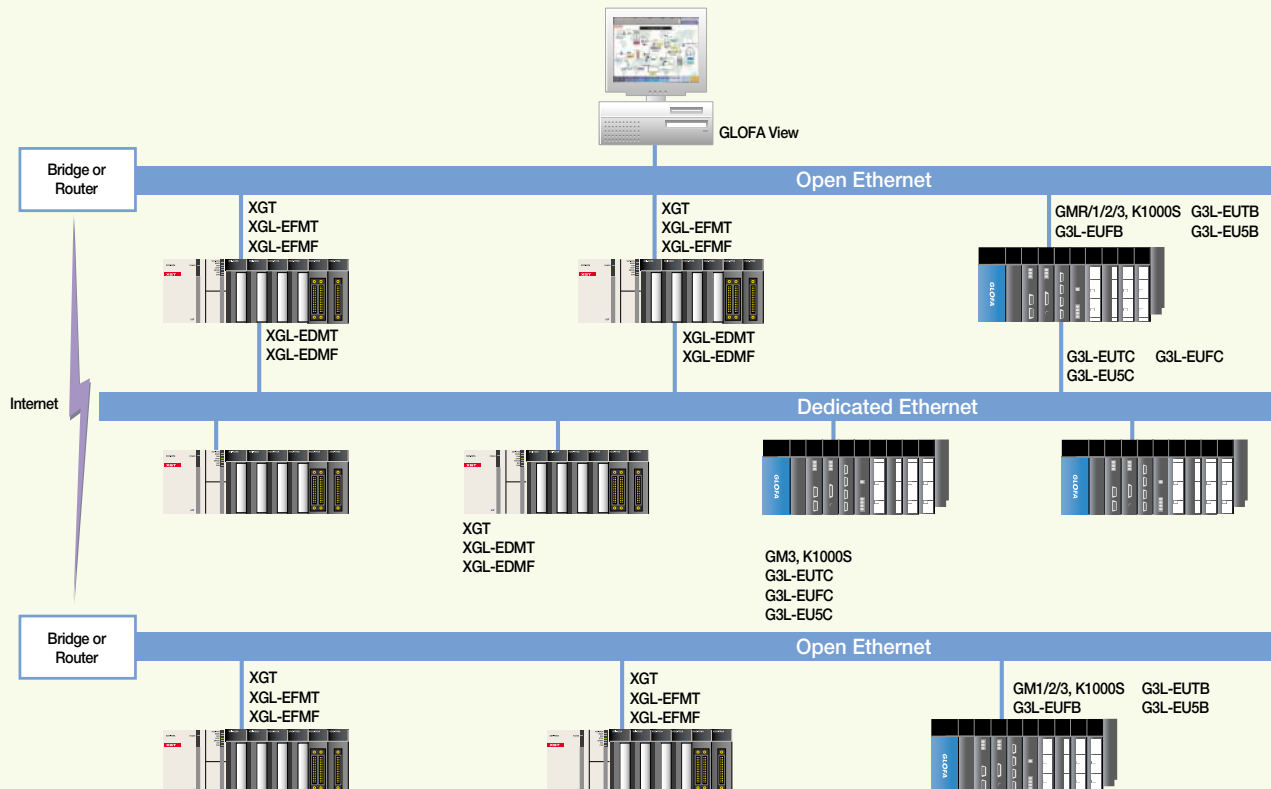


Specification

Open Ethernet	Item	XGL-EFMT	XGL-EFMF
	Communication spec.	10/100 BASE-TX	100 BASE-FX, Fiber Optic
Protocol		TCP/IP, UDP/IP	
Service	With LS PLCs	High-speed link, P2P service	
	With other devices	P2P service	
	Application	Dedicated protocol service, XG5000 service, E-Mail service	
HS link sending/receiving data	200 words/block (Max. 128 blocks)		
No. of channel connectable to upper stage	16 channels		
General use	Communication with PC (HMI) and external devices, High-speed communication among LSIS PLCs		
Purpose	UTP/STP Category 5	62.5/125 μ m, Multi-mode, SC connector	
Current consumption (mA)	410	630	
Weight (kg)	0.11	0.15	

Dedicated Ethernet	Item	XGL-EDMT	XGL-EDMF
	Communication spec.	10/100 BASE-TX	100 BASE-FX, Fiber Optic
Protocol		Dedicated protocol	
Service	With LS PLCs	High-speed link, P2P service	
	With other devices	-	
	Application	XG5000 service	
Sending/receiving data	200 words /block		
No. of connection stations	64 stations		
General use	High-speed link communication among LSIS PLCs		
Purpose	UTP/STP Category 5	62.5/125 μ m, multi-mode, SC connector	
Current consumption (mA)	410	630	
Weight (kg)	0.11	0.15	

Network

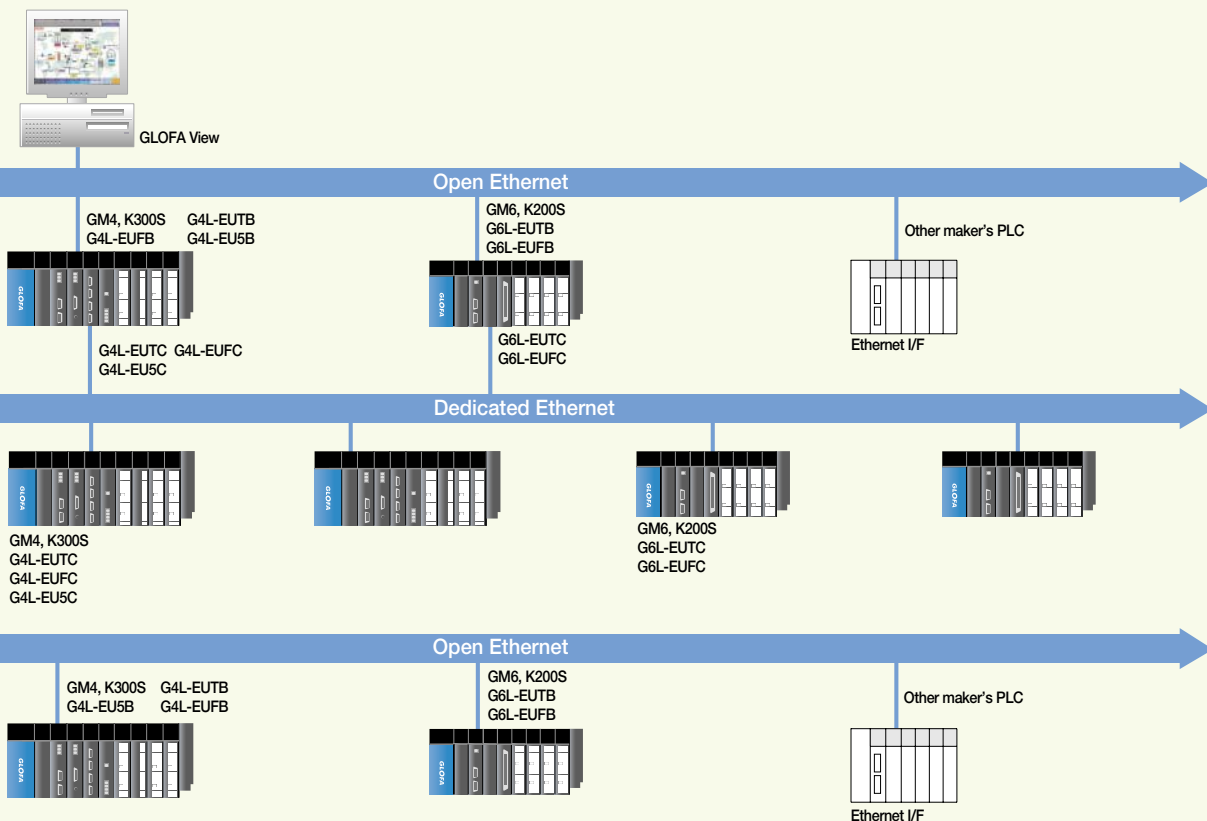

Features


- Extensive Client Messaging Support
- Encapsulated Messages, Explicit Messaging
- Class 3 Connected Explicit Messaging(Server Only)
- Class 1 Connected Implicit(IO) Messaging(Cyclic I/O Service Only)
- EtherNet/IP Conformance Test Suite Version 2.10
- 100BASE-TX , 100Mbps/ Full Duplex
- Max.24ea available on 1 CPU module (Main base / Extension base)
- No additional switch or hub (built-in switch)
- Wiring reduction and flexible installation
- Auto cross over function
- Various diagnostic function and network status information
 - Communication module status
 - P2P status
 - Auto Scan function
 - Packet and data status
 - Communication module diagnosis through network



Specification

Item	XGL-EIPT	
Communication speed	100Mbps	
Modulation method	Base band	
Max. expansion length between nodes	100m	
Access method	CSMA/CD(Full Duplex)	
Topology	Line type (Built-in switch), Star type	
Service	Periodic communication	Implicit IO Client
	Non-periodic communication	UCMM Client
	Periodic server	Implicit IO Server
Diagnostic function	Module information, Auto Scan, Media Information, Ring test	
Number of connection (Client/Server)	TCP	64/128
	CIP (IO communication)	64/128
Max. number of service	8	
Max. number of module	24	
Media	UTP/STP Category 5	
Dimension	98(H) x 27(W) x 90(D)	
Current consumption (mA)	400mA	
Weight (g)	102	

System configuration

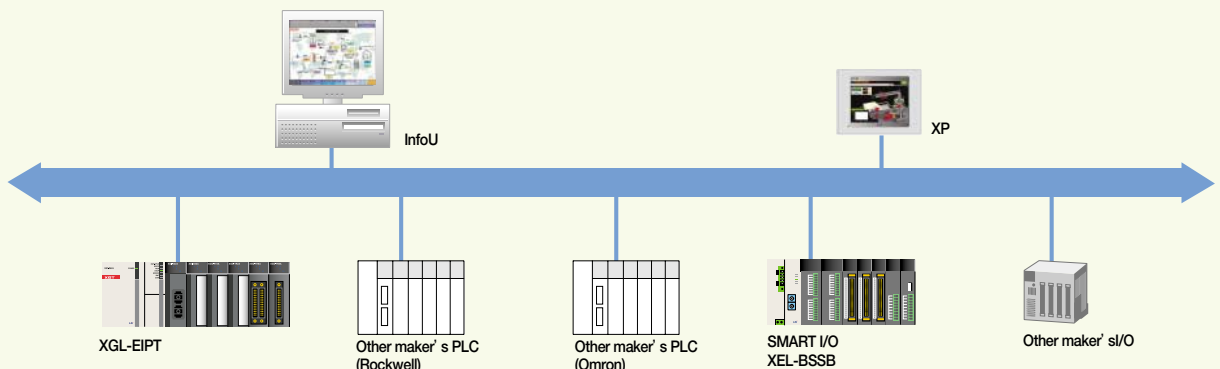

Network / XGT Industrial Optic Ring System

Features

- 100Base-FX media
- Industrial high-speed Ethernet (IEEE802.3)
- High-speed link to communicate between LS PLCs
- High-speed block to link between modules
- High-speed link and Max. 16 P2P communication
- Loader service via Ethernet (XG5000): Dedicated TCP/IP port 2002
- Easy connection to other system using P2P and XG-PD
- Dedicated protocol and Modbus TCP
- DHCP (Dynamic Host Configuration Protocol)
- Access table to communicate with PC (HMI)




Specification

Item	XGL-ESHF(100BASE-FX)	
Transmission	Communication speed	100Mbps
	Method	Base band
	Max. Distance(Node to node)	2km
	Max. Segment length	-
	Max. node	50ea / segment
	Distance (Node to node)	0.5m
	Max. Protocol size	1,500 bytes
	Media access method	CSMA/CD
	Frame error check	CRC 32
Current consumption (A)	1.2	
Weight (g)	220g	

Fiber optic cable

Item	Description
Cable type	Twin strands of Multi mode fiber (MMF)
Connector	SC type
Diameter	62.5/125 μ m
Wave length	1,350nm
Diminution	Within 2dB/1,000m


System configuration

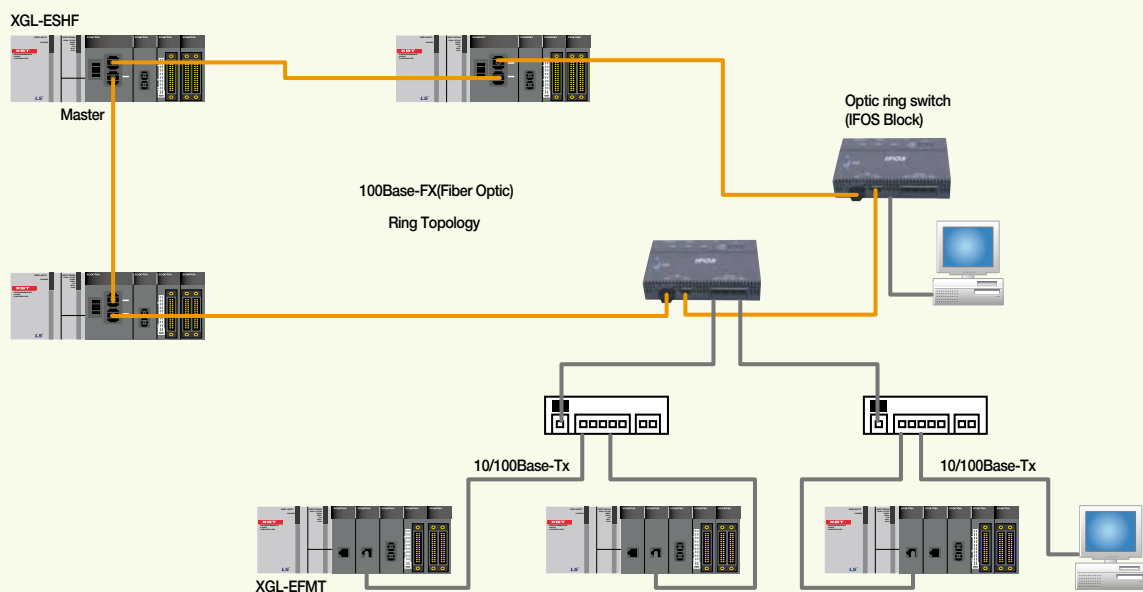

Network

Features


- Rack type: No external power
- Reliability for industrial standard
- Auto Crossover
- FG (Frame Ground) for RJ-45 connector
 - Decreased communication error by shielded FTP/STP cable



Specification

Item		XGL-EH5T
Transmission	Communication speed	10/100Mbps
	Port type	10/100BASE-TX, TP cable, RJ-45 socket, 5ports
	Interface	Auto-Crossing, Auto-Nego., Auto-Polarity
	Distance	100m
	Diagnosis	LED (PWR, Link status, Data)
Current consumption (mA)		550
Weight (g)		90

System configuration

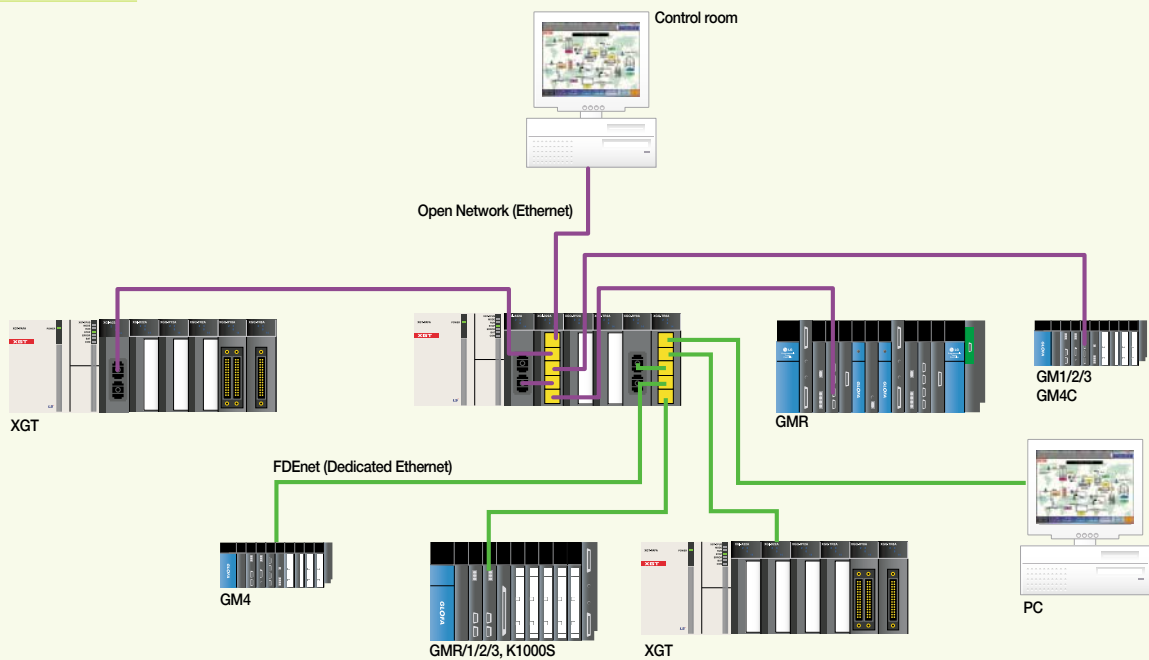

Network / XGT Fnet System

Features

- Dedicated LSPLC - Dedicated network for LS PLC
- Easy high-speed link parameter setup
- 1Mbps high-speed communication
- Max. 750m
- Max. 6ea repeater available (Max. expansion 5.25km)
- Network management through Auto scan
- Max. 12ea on 1ea base
- Deterministic Network through Token Passing & Broadcasting
- 3,840 Word for each station
(Send 1920 Word /Receive 1920 Word)
- Max. number of block: Send 32blocks, Receive 64blocks, 60words for each block
- Max. communication points: 3840words (64block²÷60word)
- Setup: Parameter download via XG-PD
- Diagnosis by XG-PD: Communication module information, High speed link fault, Auto scan




Network

Specification

Item	Description
Communication speed	1Mbps
Encoding method	Manchester Biphase-L
Transmission length (for one segment)	Max. 750m
Transmission length (via repeater)	Max. 750m × (6ea repeaters+1)=5.25km
Transmission cable	Twisted pair shield cable
Max. number of connection	64stations (32stations /segment, 64stations for repeater)
Max. protocol size	256 bytes
Access method	Circulated Token Passing
Frame error check	CRC 16 check
Max. number of installation	12ea
Installation base	Main base or expansion base
Current consumption (mA)	410
Weight (g)	120

System configuration

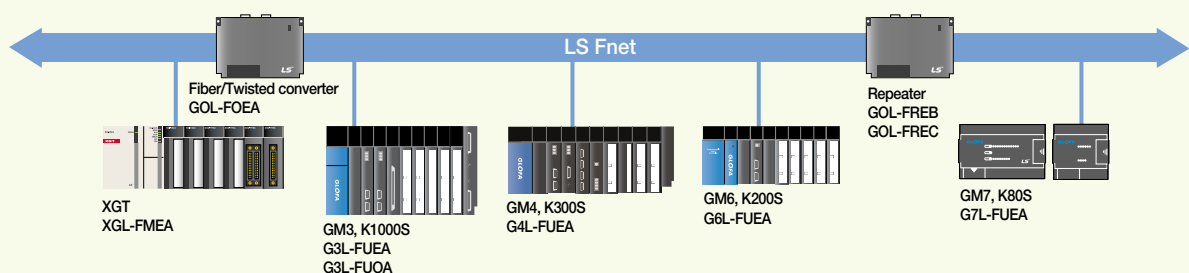

Features


- Easy protocol editing and communication parameter setting: XG-PD
- Long-distance communication via modem connection
- Dedicated protocol for multi-drop configuration connectable up to 32 units
- RS-232C/422 communication port
- Flexible communication speed setting (300~115,200bps)
- Supporting full duplex and half duplex communication
- Max. 12 modules available in one CPU
- P2P service: User-defined communication and XGT/MODBUS master
- Various connection to MMI S/W (XGT, MODBUS RTU, MODBUS ASCII)
- Various diagnosis functions using XG-PD (I/O, link status, service status)
- Communication service information (Dedicated service, P2P service)
- Supporting simultaneously dedicated service in remote connection
- Communication without additional setting when replacing communication module

Various independent operation mode


- Operation mode
- Dedicated protocol mode (Simultaneous support)
- Program upload/download by XG5000 protocol (RS-232C)
Communication using LSIS dedicated protocol
- User-defined communication of P2P mode and XGT/MODBUS master



Communication via RS-232C/422

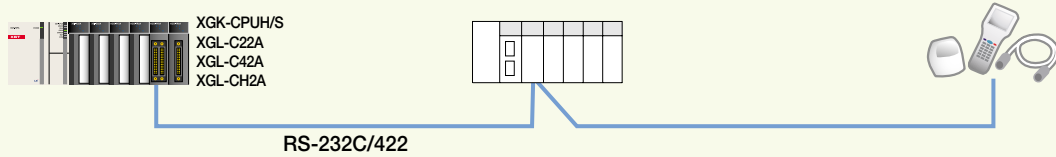


1: N and N: M connection (LSIS and other)

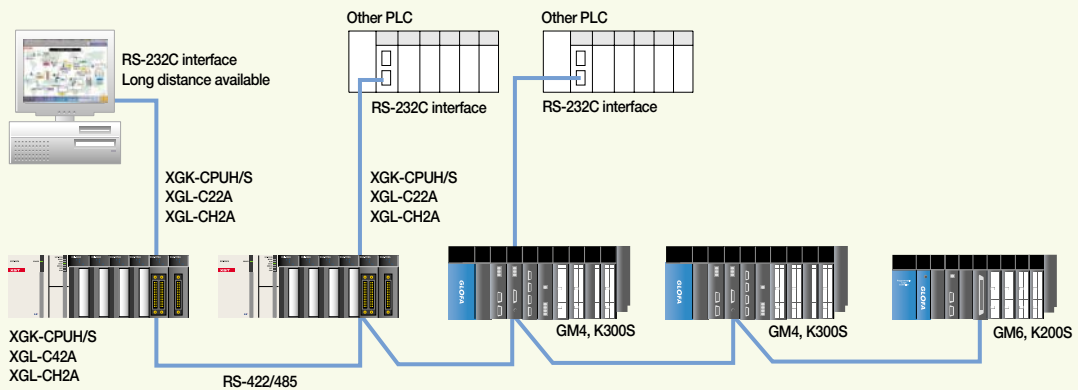


Specifications

Item	Specifications		
	XGL-C22A	XGL-C42A	XGL-CH2A
Interface	RS-232C, 2 channels	RS-422, 2 channels	RS-232C/RS-422, 1 channel
Modem connection	Remote communication with external devices via modem connection. Available for only RS-232C port.		
Communication mode	Dedicated mode	1: 1 or 1: N communication using LSI dedicated protocol	
	XG5000 mode	Program upload/download and remote control	
	P2P mode	Communication by protocol using XG-PD (Interface with other PLCs), XGT, MODBUS RTU/ASCII master communication	
Operation mode	Server (Slave)	Remote connection simultaneously using XGT/MODBUS Server, user-defined	
	Master	XGT, MODBUS RTU/ASCII master, user-defined	
Data type	Start Bit	1	
	Data Bit	7 or 8	
	Stop Bit	1 or 2	
	Parity	Even/Odd/None	
	Setting	Basic parameter setting with XG-PD	
Synchronization	Asynchronous		
Transmission speed (bps)	Selectable among 300/600/1,200/2,400/4,800/9,600/19,200/38,400/57,600/115,200 bps		
Station number setting	Up to 32 stations from 0 to 31 with XG-PD		
Transmission distance	RS-232C: Max. 15m (Extendible by using modem), RS-422/485: Max. 500m		
Modem communication	Available	Not available	Available via RS-232C
Network configuration	RS-232C 1: 1, RS-422 1: 1, 1: N, N: M		
Diagnosis function	Available through LED and XG-PD diagnosis service		
Max. number of installation	12		
Current consumption (mA)	310	300	310
Weight (Kg)	0.12	0.12	0.12

MODBUS

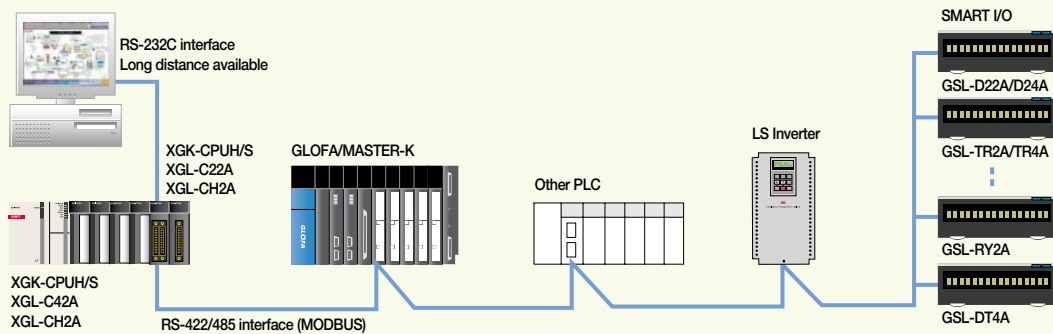

Cnet cable connection

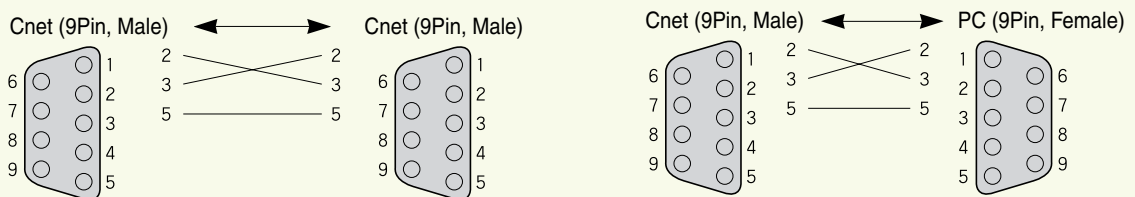


Features

- Communication speed: 1Mbps
- Communication distance: Max. 750m
- Available to use max. 6 repeaters (Up to 5.25Km)
- Network management using Auto-scan (Slave module information)
- Multi-drop network with smart I/O
- Network diagnosis and monitoring by XG-PD
- Max. 64 stations of slave modules controlled by one master module



System configuration

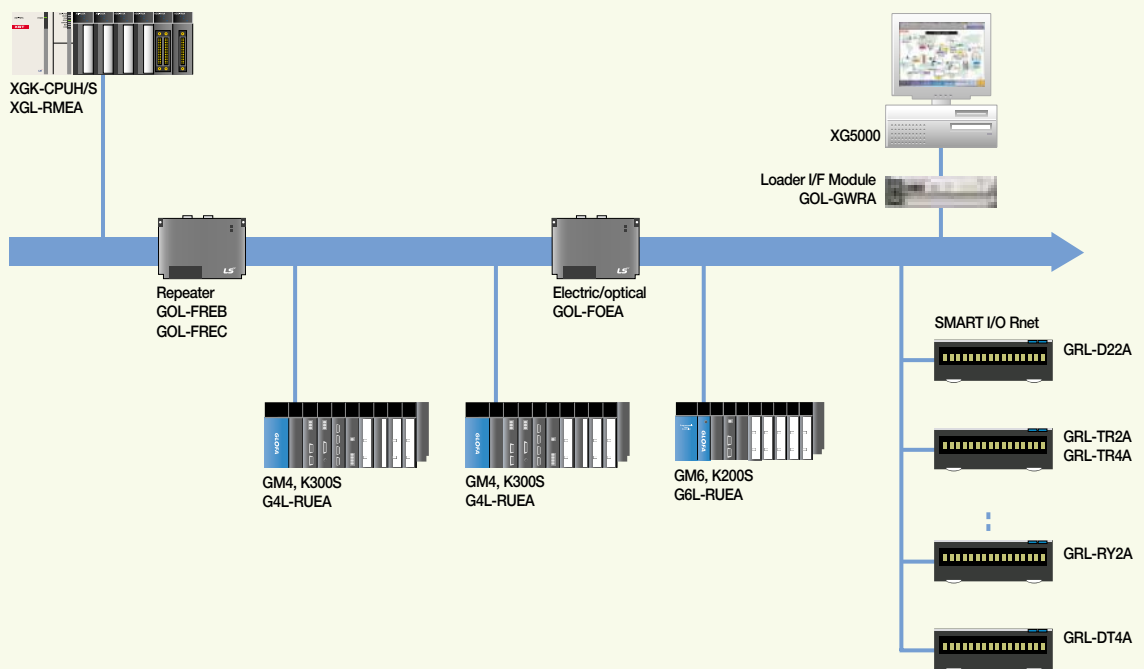

Specifications

Item	Specifications (XGL-RMEA)
Transmission speed	1Mbps
Encoding	Manchester Biphas-L
Transmission distance (Per segment)	Max. 750m
Transmission distance (When using repeater)	Max. 750m * (6 repeater + 1) = 5.25Km
Transmission cable	Twisted pair shield cable
Max. number of connection stations	Master + Slave = 64 stations (with repeater), 1 segment=32 stations (with master)
Max. size of protocol	256 bytes
Medium access method	Circulated Token Passing
Frame error check	CRC 16 check
Max. number of installation	12
Installation position	Main base or expansion base
Current consumption (mA)	410
Weight (Kg)	0.12

SMART I/O

- Reduction of wiring and real-time control of distributed I/O
- Various I/O module (16/32 points)



Network

Repeater specifications

Item	Specifications
Type	G0L-FREB: AC110V ~ AC220V, G0L-FREC: DC 24V
Communication speed	1Mbps
Transmission method	Twisted pair shield cable
Transmission distance	Max. 750m per repeater
Max. number of installation between stations	Max. 6 repeaters
Max. distance between stations	5.25Km (when 6 repeaters are installed)
Fault data reception	Error data transmission
Frame error check	CRC 16 check

Network cable and peripheral devices


Item	Specifications	Remarks
Twisted pair electric cable	LREV-AMESB, 2 × 1mm, 18AWG	LS cable
RF terminator	110Ω, 1/2 Watt	-

Features

- DeviceNet protocol
- Direct control of various I/O devices via Dnet system
- Max. 63 slave modules controlled by one master module
- Flexibility in network configuration: Multi-drop and T branch connection
- Connectable to other master module and various slave modules
- Providing 'Auto Network Scan' function and various information with configuration tool (SyCon)
- Communication using High-speed link parameter
- Connectable to various slave I/O including other module (Common I/O, Actuator, Switch, Optical switch, Valve, Inverter, A/D module, Position controller etc..)
- Automatic monitoring of slave modules in the network: Auto-scan (XG-PD)
- Easy expansion: up to 12 master modules
- Network setting by SyCon/XG-PD (Parameter setting, diagnosis and monitoring)



System configuration with LSIS products

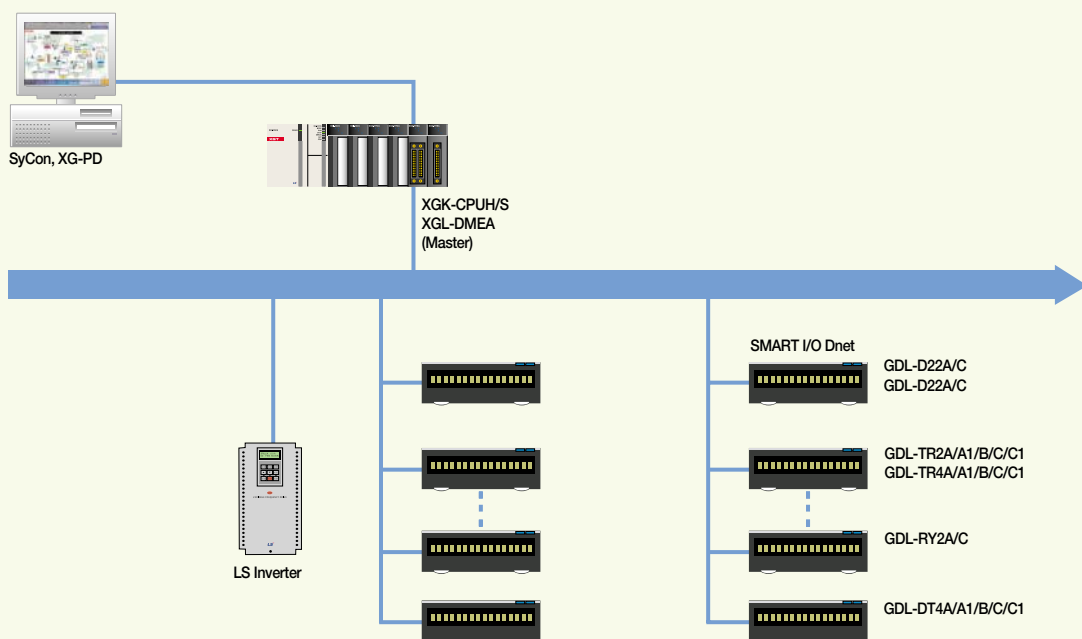


Specifications

Item	Specifications (XGL-DMEA)			
Module type	Master			
Transmission distance and speed	Trans. speed	Max. network length	Max. drop cable	Length of all drop cable
	500kbps	100m	6m	39m
	250kbps	250m	6m	78m
	125kbps	500m	6m	156m
Max. number of connection stations	64 stations (Master 1 + Slave 63)			
Max. number of node	Max. 64 MAC ID (Node address)			
Communication method	Bit Strobe, Poll, COS, Cyclic			
Diagnosis function	Duplicated station check Abnormal station detection/CRC error check/Scan List/Operation display (LED)			
Cable	Dnet dedicated cable: 5 (Signal: 2, power: 2, shield: 1)			
Max. number of installation	12			
Configuration tool	SyCon			
Configuration port	RS-232C Configuration Port			
Current consumption (mA)	440			
Weight (Kg)	0.11			

Network

System configuration with other products

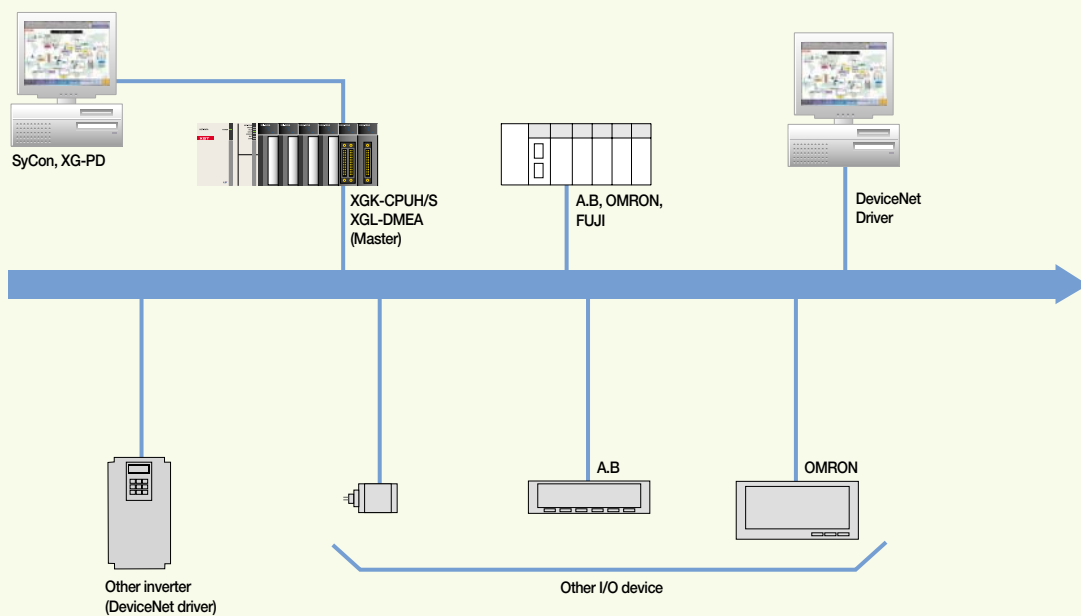


Features

- Profibus-DP protocol
- Proper to communicate among a master automation device and distributed slave I/O devices.
- Fast slave communication without application layer
- Transmission speed: 9.6Kbps ~ 12Mbps
- Transmission distance: Max. 1,200m
- Max. 126 slave stations available (32 stations per segment)
- Network setting using SyCon/XG-PD (Parameter setting, diagnosis and monitoring)
- I/O data of master station: 7kbytes
- Automatic monitoring of slave modules in the network: Auto-scan (XG-PD)
- Multi master
- Providing 'Auto Config' and various information with configuration tool (SyCon)




System configuration with LSIS products

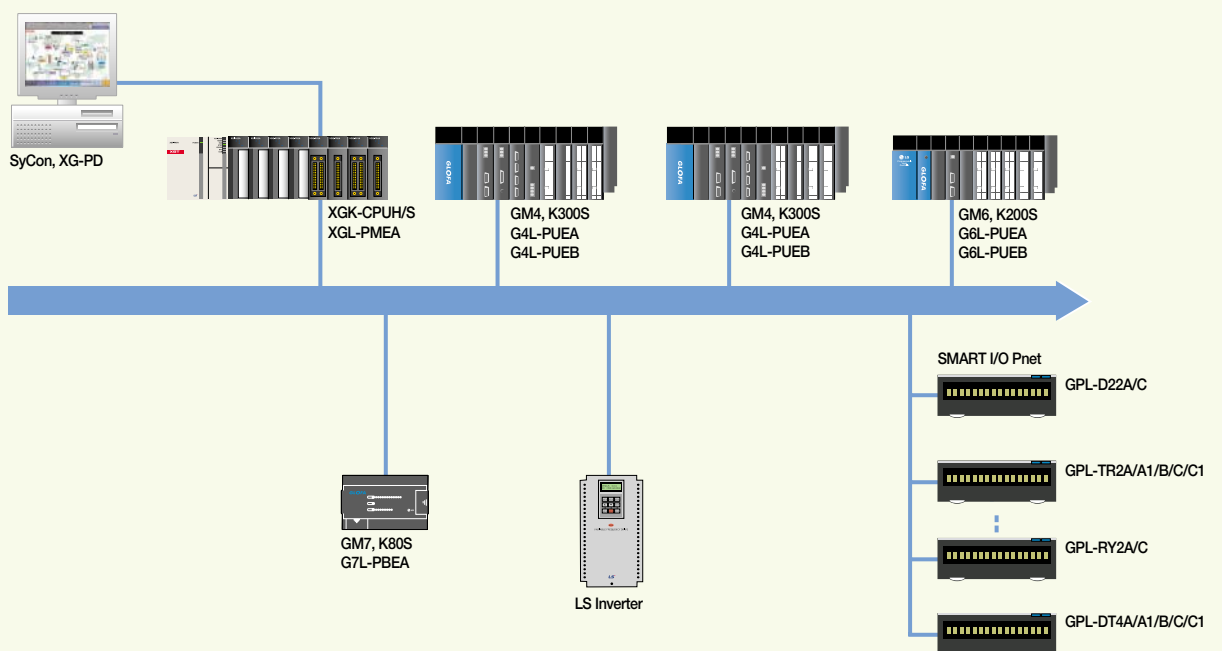

Specifications

Item		Specifications (XGL-PMEA)
Module type		Master
Network type		Profibus-DP
Standard		EN50170/DIN19245
Interface		RS-485 (Electric)
Media access		Token Passing & Poll
Topology		Bus
Modulation		NRZ
Cable		Shield Twisted Pair Cable
Transmission distance and speed	1,000m	9.6K-187Kbps
	400m	500Kbps
	200m	1.5Mbps
	100m	3M-12Mbps
Max. number of slave per network		126
Max. number of slave per segment		32
Max. I/O data		Input: 3584byte, Output: 3584byte
Max. number of communication points		7Kbytes
Communication parameter setting		XG-PD, SyCon
Max. number of installation		12
Configuration Tool		SyCon
Configuration Port		RS-232C Configuration Port
Current consumption (mA)		550
Weight (Kg)		0.11

System configuration with other products

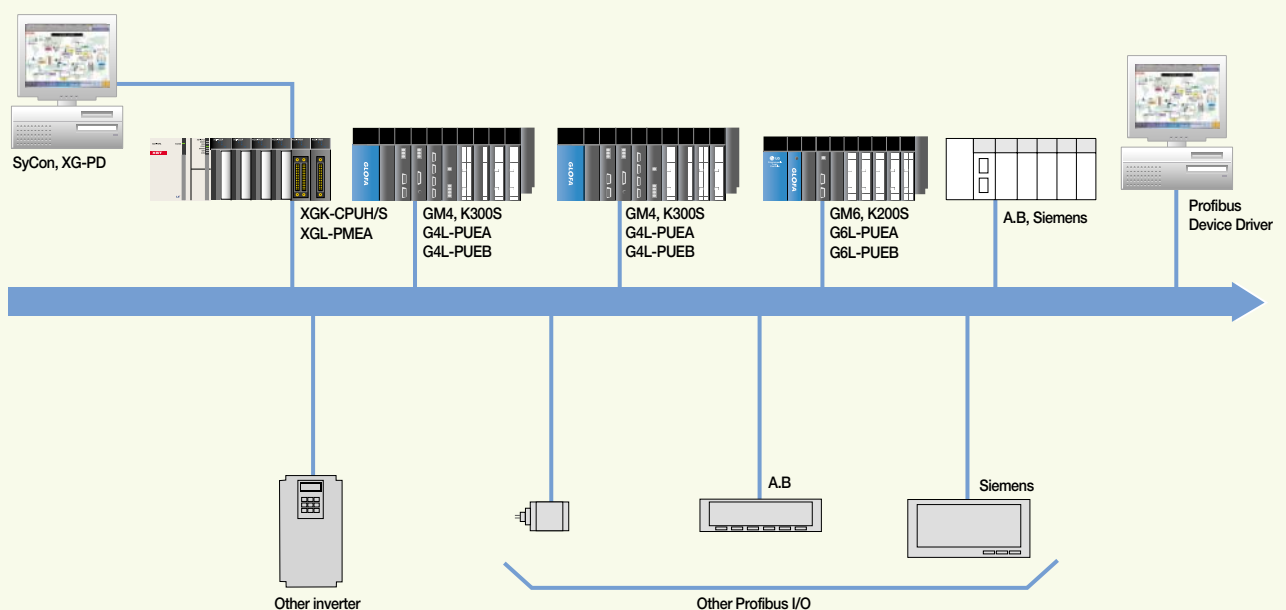


Communication among PLCs

This is a system configuration communicating between XGT PLCs by serial communication. In this case, PLC 1 is the master (Client) and other PLC should be slaves (Server). It is called Master/Slave communication. Master PLC is defined by comm. basic parameter and P2P setting. And slave PLC is defined by basic parameter and driver setting.

Configuration

PLC1 reads present value, C0000 of PLC2's up-counter and then saves it in M0200 of PLC1.

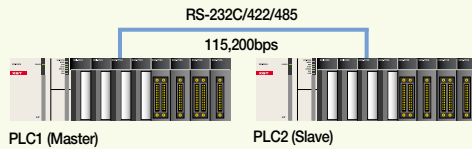


Data memory

PLC station	PLC memory	Setting Item
PLC 1	M0100	1. XG-PD parameter setting, 2. XG5000 programming
PLC 2	C0000	1. XG-PD parameter setting, 2. XG5000 programming

XG-PD setting


PLC 1 setting (Master)




Communication basic parameter setting
Setting up station number, communication speed, etc. And setting up the operation mode as P2P




P2P channel setting
Setting up channel 01 as [XGT client]



P2P setting
Setting up P2P block (READ)



Communication data setting
Setting up Read area, Save area, etc.




Enable Link
Enabling P2P for communication start



Parameter writing
Downloading parameters to PLC after online connection

PLC 2 setting (Slave)




Communication parameter setting
Setting up station number and channel 01 mode as 1 and XGT server

* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

XG5000 programming


PLC station 2 setting

Make up-counter program using CTU command

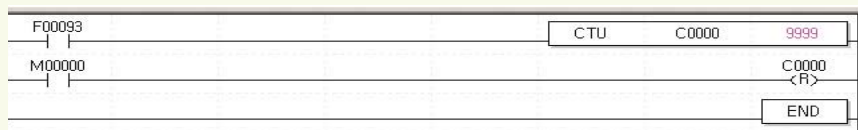

PLC station 1 setting

Check out the counter value of M0100 is transmitted.

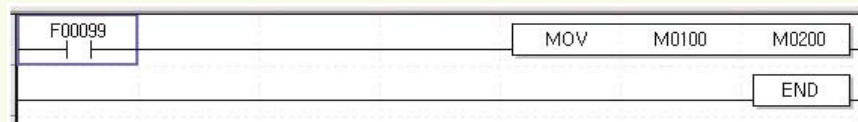


HMI communication configuration

This is a system configuration to monitor and control PLC (XGT) by XP (HMI). In this case, PLC is the slave (Server) and XP should be the master (Client). PLC is defined by comm. basic parameter and driver setting.

Configuration


Making On/Off touch tag for controlling M0001 of XGT

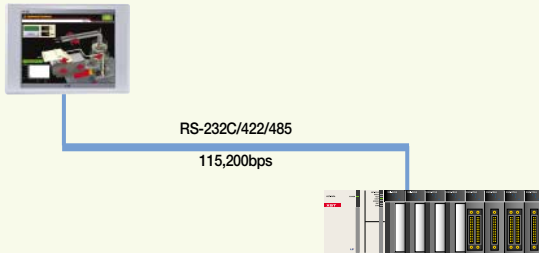

Data memory

PLC memory	Setting item	PMU
M000D1	1. XG-PD parameter setting	Using touch tag
	2. XG5000 programming	

XG-PD setting



Basic communication parameter setting
Setting up station number, communication speed, etc And setting up the operation mode as XGT server

Write Parameter (Standard Settings,HS Link,P2P)
Read Parameter (Standard Settings,HS Link,P2P)
Enable Link (HS Link,P2P)

Parameter writing
Downloading parameters to PLC after online connection



PMU setting
Setting up communication setting (speed, data, stop, parity, etc) same as XGT

* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

XG5000 programming

Create program that P00010 is on right after M00001 is on.




Network / Communication example (Ethernet)

HMI communication configuration

This is a data communication system configuration among XGT PLCs via Ethernet network. In this case, communication is possible by HS link among PLCs. It just needs basic parameter setting and HS link item setting.

Configuration

Read the up-counter value C0000 of PLC1 and monitor it in GLOFAView.

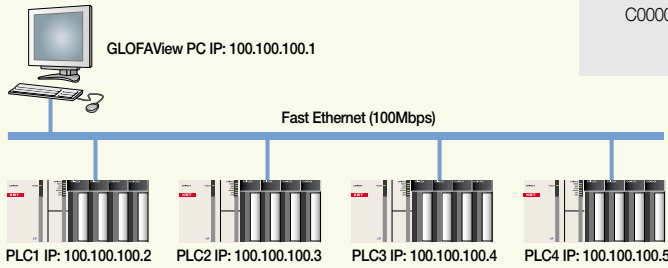


Data memory


PLC memory	Setting item	GLOFAView
C0000	1. XG-PD parameter setting	Using analog tag
	2. XG5000 programming	

XG-PD setting


PLC 1 setting (Master)

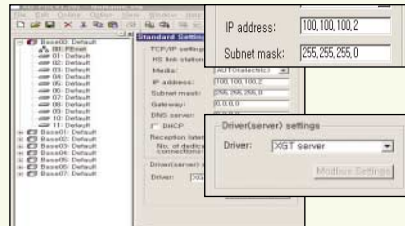


Basic communication parameter setting
Specifying IP address and Subnet mask of PLC as above




Parameter writing
Downloading parameters to PLC after online connection



Ping Test
Starting diagnosis after inputting IP address of PLC



System Diagnosis
Selecting Ping Test




Communication test
Checking online and system diagnosis

* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

XG5000 programming

Make the up-counter program using CTU command.

Check out if the counter value of CTU value is transmitted.

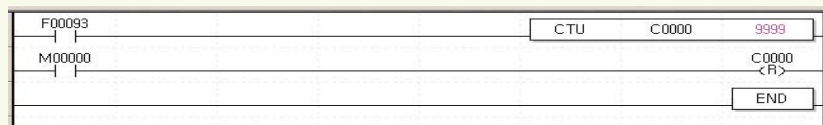


High-speed link communication

This is a configuration for XGT to communicate each other via Ethernet. It just needs communication basic parameter setting and High-speed link item setting.

Configuration

Read present value C0000 of PLC1 and transmit it to M0000 of PLC2.

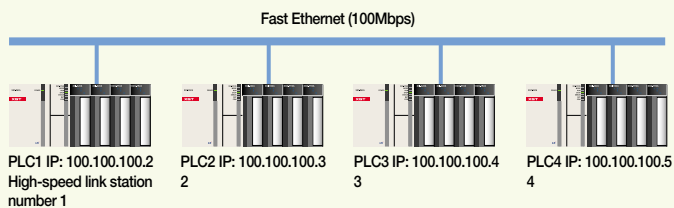


Data memory


PLC station	PLC memory	Setting Item
PLC 1	C0000	1. XG-PD parameter setting, 2. XG5000 programming
PLC 2	M0100	1. XG-PD parameter setting, 2. XG5000 programming

XG-PD setting

PLC station 1 setting




Basic communication parameter setting
Specifying HS link station, IP address and Subnet mask of PLC as above

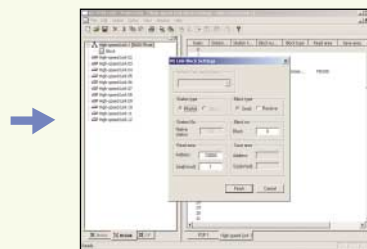

Communication data setting
Setting up communication data in HS link item as above




Parameter writing
Downloading parameters to PLC after online connection




Enable Link
Enabling link for communication start

PLC station 2 setting



Basic communication parameter setting
Specifying HS link station, IP address and Subnet mask of PLC as above

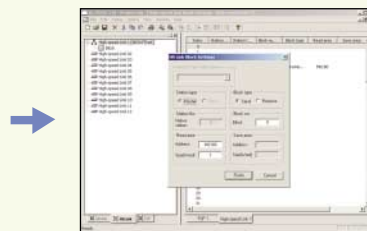

Communication data setting
Setting up communication data in HS link item as above



Parameter writing
Downloading parameters to PLC after online connection




Enable Link
Enabling link for communication start

* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

XG5000 programming


PLC1 setting

Make the up-counter program using CTU command

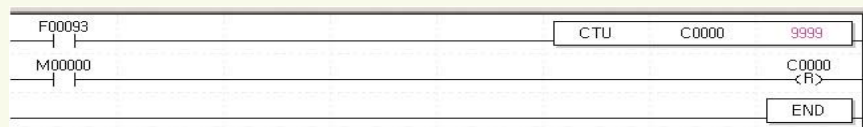

PLC2 setting

Check out if the counter value of M0100 is transmitted.

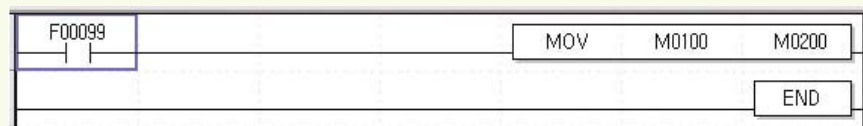


Network

Remote I/O configuration

LSIS developed communication method is Rnet which is 'Distributed Control System' using Smart I/O. In this case, PLC is the master and the other Smart I/O are slaves. It just needs basic parameter setting for communication and High-speed link setting.

Configuration

PLC controls each Smart I/O (16-point).

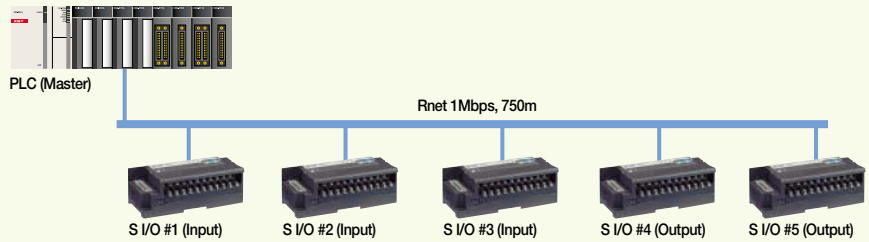


Data memory

Smart I/O #	Smart I/O address	PLC address	Setting item
1	P0000	P0010 (P00100~P0010F)	1. XG-PD parameter setting, 2. XG5000 programming
2	P0000	P0011 (P00110~P0011F)	
3	P0000	P0012 (P00120~P0012F)	
4	P0000	P0013 (P00130~P0013F)	
5	P0000	P0014 (P00140~P0014F)	

XG-PD setting

Communication data setting
Setting up type name, station number, address of each station's Smart I/O in HS link item as following example.

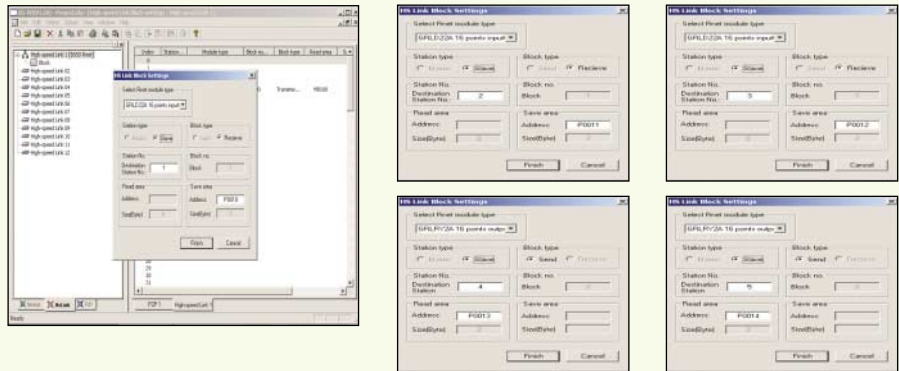

Station	Station No.	Module Type	Block No.	Block Name	Start Area	End Area
1	1	GPLD22A 16 points m...	1	Input	P0010	P001F
2	2	GPLD22A 16 points m...	1	Input	P0011	P001E
3	3	GPLD22A 16 points m...	1	Input	P0012	P001D
4	4	GPLD22A 16 points m...	1	Input	P0013	P001C
5	5	GPLD22A 16 points m...	1	Input	P0014	P001B

HS link registration completed

Write Parameter (Standard Settings.HS Link.P2P)
Read Parameter (Standard Settings.HS Link.P2P)S
Enable Link (HS Link.P2P)

Parameter writing
Downloading parameters to PLC after online connection


Write Parameter (Standard Settings.HS Link.P2P)
Read Parameter (Standard Settings.HS Link.P2P)
Enable Link (HS Link.P2P)

Enable Link
Enabling link for communication start

* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

XG5000 programming

Write a program using I/O address of Smart I/O.

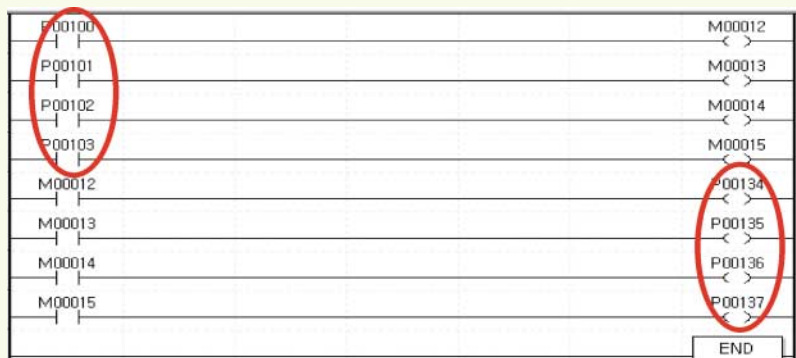


High-speed link communication among PLCs

XGT can create 'Distributed Control System' with Smart I/O, Inverter, pneumatic device via Profibus-DP. In this case, PLC is the master and the other devices such as Smart I/O are slaves. It just needs SyCon, basic parameter and High-speed link setting.

Configuration


PLC controls each Smart I/O (16-point).

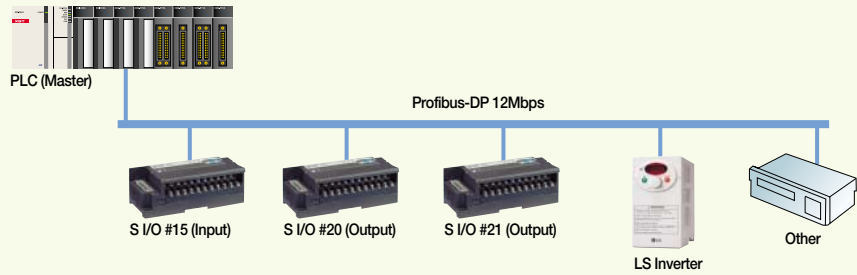


Data memory

Smart I/O #	Smart I/O address	PLC address	Setting item
15	P0000	P0010 (P00100~P0010F)	1. SyCon setting 2. XG-PD parameter setting, 3. XG5000 programming
20	P0000	P0011 (P00110~P0011F)	
21	P0000	P0012 (P00120~P0012F)	


XG-PD setting



SyCon setting
For detailed setting instruction, refer to page 43 (SyCon setting)



HS link setting
Uploading SyCon and setting up each Smart I/O station as following example

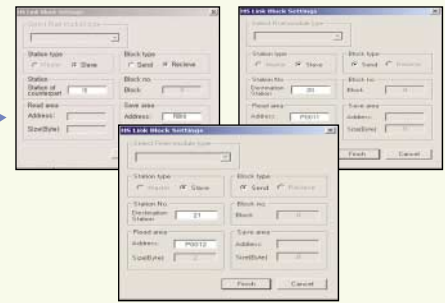

Parameter writing
Downloading parameters to PLC after online connection




Enable Link
Enabling link for communication start

* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

XG5000 programming

Write a program using I/O address of Smart I/O Pnet

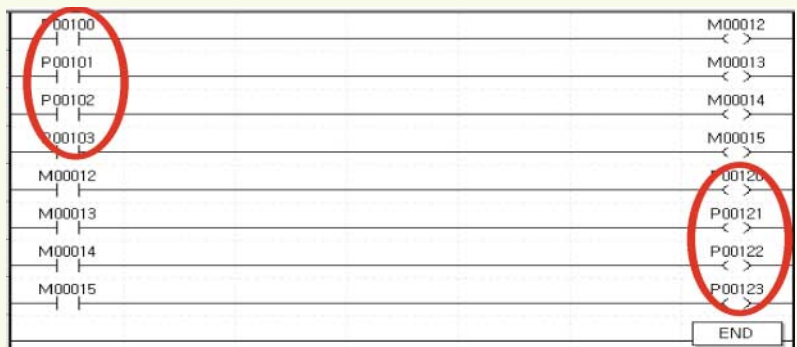


Network / Communication example (DeviceNet)

High-speed link communication between PLCs

XGT can create 'Distributed Control System' with Smart I/O, Inverter, pneumatic device via Dnet. In this case, PLC is the master and the other devices such as Smart I/O are Slaves. It just needs SyCon, basic parameter and High-speed link setting.

Configuration

PLC controls each Smart I/O (16 points).

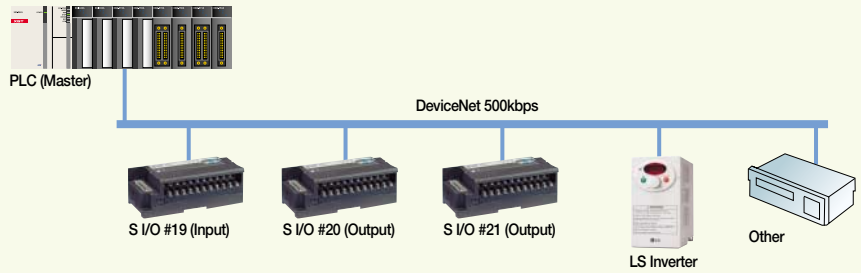

Data memory

Smart I/O #	Smart I/O address	PLC address	Setting item
19	P0000	P0010 (P00100~P0010F)	1. SyCon setting 2. XG-PD parameter setting, 3. XG5000 programming
20	P0000	P0011 (P00110~P0011F)	
21	P0001	P0012 (P00120~P0012F)	


XG-PD setting




SyCon setting
For detailed setting instruction, refer to page 43 (SyCon setting)



HS link setting
Uploading SyCon and setting up each Smart I/O station as following example

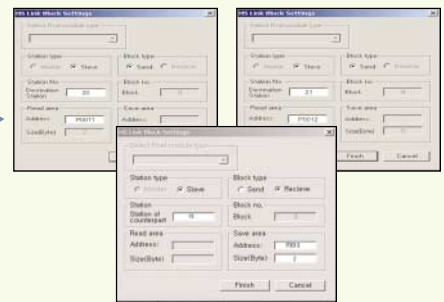

Parameter writing
Downloading parameters to PLC after online connection




Enable Link
Enabling link for communication start

* For basic parameter setting and SyCon setting/change, reset the module (Online reset).

XG5000 programming


Write a program using I/O address of Smart I/O Dnet.

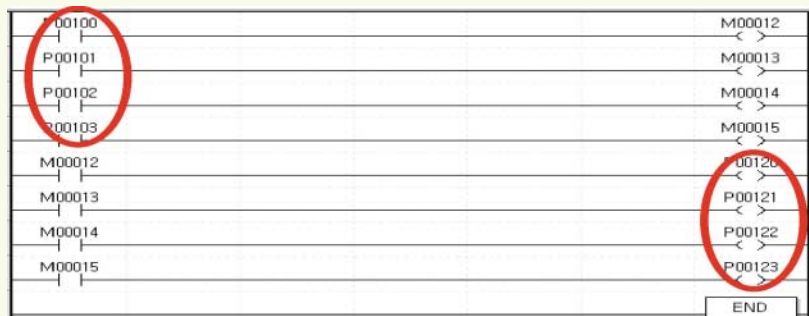


Network / Communication example (SyCon setting Profibus, DeviceNet)

SyCon is the dedicated software that help user set up the communication environment for Profibus-DP and DeviceNet more easily and conveniently.


Example of application




New file
Select fieldbus that is used.




Basic communication parameter setting
Select [Master] in Insert menu.

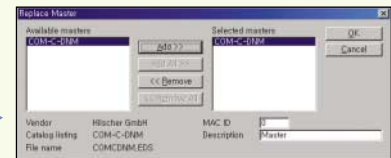


Master module setting
Select [COM-C-DNM] for DeviceNet.
Select [COM-C-DPM] for Profibus-DP.

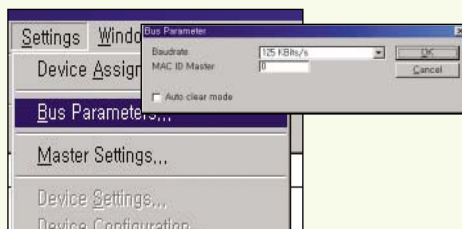


Bus parameter setting
Set up communication speed of master module.

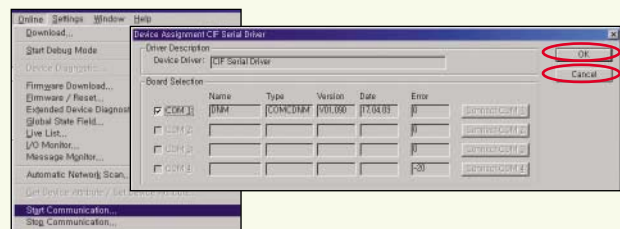


Master module setting
After clicking the port button, check the right check-box.

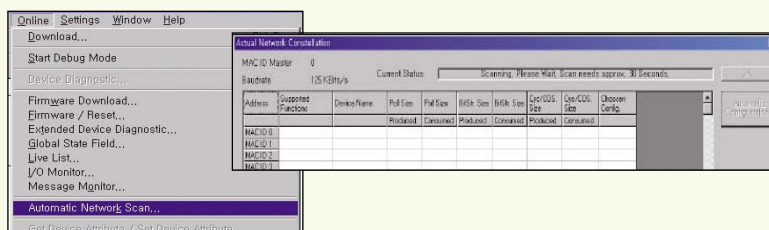


Automatic network scan of connected Smart I/O
Perform automatic network scan after station number setting and wiring with remote device such as Smart I/O.
At this time, all remote devices should be in normal connection (Power-On, etc).
After network scan is completed, press [Automatic Configuration] button and [OK] button.



Network checking
Check normal network (remote) condition.

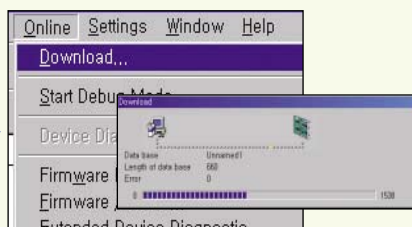

Parameter download



Disconnect
Disconnect the port in Device Assignment.

Features

- Wiring reduction and real time control of distributed I/O
- Supporting Rnet, DeviceNet, Profibus-DP, MODBUS (RS-422/485)
- Various I/O (DC/TR/Relay) modules with the unit of 16/32 points



Digital I/O specifications

Item	Input		Output			Mixed module	
	DC (Sink/Source)		Transistor (Sink)		Relay	DC (Sink/Source)	Transistor (Sink)
No. of point	16	32	16	32	16	16	16
Rated input (Load voltage)	DC 24V		DC 24V		DC 24V/AC 110V/220V	DC 24V	DC 24V
Input current (Load current)	7mA		0.1A/2A, 0.5A/3A		2A/5A	7mA	0.1A/2A, 0.5A/3A
Response time	Off → On	3ms or less	3ms or less		3ms or less	3ms or less	3ms or less
	On → Off	3ms or less	3ms or less		3ms or less	3ms or less	3ms or less
Common	16 points/COM		16 points/COM		16 points/COM	16 points/COM	16 points/COM
Current consumption	200mA	300mA	280mA	380mA	550mA	350mA	
Network	Rnet	GRL-D22A	GRL-D24A	GRL-TR2A	GRL-TR4A	GRL-RY2A	GRL-DT4A
	Profibus-DP	GPL-D22A ●	GPL-D24A ●	GPL-TR2A ▲	GPL-TR4A ▲	GPL-RY2A ●	GPL-DT4A ▲
	DeviceNet	GDL-D22A ●	GDL-D24A ●	GDL-TR2A ▲	GDL-TR4A ▲	GDL-RY2A ●	GDL-DT4A ▲
	MODBUS	GSL-D22A	GSL-D24A	GSL-TR2A	GSL-TR4A	GSL-RY2A	GSL-DT4A

Note1) Specification stated in the table is specification of type A.
Refer to XGT user's manual.
● A, C ▲ A, A1, B, C, C1

A Sink, Rated current: 0.1A, terminal fixed type
A1 Sink, Rated current: 0.5A, terminal fixed type

B Source, Rated current: 0.5A, terminal fixed type
C Source, Rated current: 0.5A, terminal separated type
C1 Sink, Rated current: 0.5A terminal separated type

Analog I/O specifications

Item	GPL-AV8C	GPL-AC8C	Item	GPL-DV4C	GPL-DC4C
Input channels	8 channels		Output channels	4 channels	
Analog input	DC 1~5V, 0~5V, 0~10V, -10~+10V	0~20mA, 4~20mA, -20~20mA	Digital input	0~4000, 0~8000, -8000~8000	0~8000
Digital output	0~4000, 0~8000, -8000~8000	0~4000, -8000~8000	Analog output	DC 1~5V, 0~5V, 0~10V, -10~+10V	0~20mA, 4~20mA
Input impedance	1MΩ	250 Ω	Load impedance	1KΩ or more (0~5V or 1~5V) 2KΩ or more (0~10V or -10~10V)	500 Ω or less
Max. resolution	±15V 1.25mV	±30mA 2.5μA	Resolution	1.25mV	2.5μA
Accuracy	±0.3% (full scale, Ta=0~55°C)	±0.3% (full scale, Ta=23°C±5°C) ±0.4% (full scale, Ta=0~55°C)	Accuracy	±0.3% (full scale, Ta=0~55°C)	±0.3% (full scale, Ta=23°C±5°C) ±0.4% (full scale, Ta=0~55°C)
Conversion speed	10ms or less / 8 channel		Conversion speed	10ms or less / 4 channel	
Response period	10ms or less / 8 channels + Transmission period (ms)		Response period	10ms or less / 8 channels + Transmission period (ms)	
Insulation method	Analog input/output terminal with FG→Insulation Analog input/output terminal with Communication terminal→Insulation Analog input/output terminal with each channel→No insulation		Insulation method	Analog input/output terminal with FG→Insulation Analog input/output terminal with Communication terminal→Insulation Analog input/output terminal with each channel→No insulation	
External power supply	DC24V (21.6 ~ 26.4)		External power supply	DC24V (20.4 ~ 28.8)	
External current consumption	DC24V : 220mA		External current consumption	210mA	240mA
Weight (kg)	0.313	0.313	Weight (kg)	0.314	0.322

Communication specifications

Item	Rnet (Dedicate network for LSIS Smart I/O)	Profibus-DP	DeviceNet	MODBUS
Protocol	LSIS dedicated protocol (Fnet for Remote)	Profibus-DP (RS-485/EN50170)	DeviceNet (CAN)	MODBUS (RS-422/485)
Transmission speed	1Mbps	9.6kbps ~ 12Mbps	125/250/500Kbps	2.4Kbps ~ 38.4Kbps
Transmission distance	750m/segment	100m ~ 1.2Km	500/250/125m (Thin cable: 100m)	500m
Topology	Bus Token	Bus	Trunk & Drop	Bus
Transmission	Pass & Broadcast	Token Pass & Master/Slave (Poll)	CSMA/NBA (Poll, Cyclic, COS, BitStrobe)	Master/Slave (Poll)
No. of stations	32/segment (Input: 32, Output: 32)	32/segment, 99/network	64	32
Link capacity	2,048 points/master (64 stations × 32 points)	7Kbyte/master	2,048 points/master	64 points/station

Note1) Smart I/O supports Poll type currently, but is supposed to support Cyclic, COS and Strobe later on.

Network / SMART I/O (MODBUS/TCP, EtherNet/IP Adapter)

Features

- IEEE 802.3 standard
- MODBUS/TCP, EtherNet/IP
- 10/100BASE-TX media
- Ethernet Twisted pair 2ports (RJ-45)
- 2channels Ethernet MAC
- Auto-Negotiation/Auto-Crossover
- Various system configuration



Specification


Items	XEL-BSSA	XEL-BSSB
Protocol	MODBUS TCP	EtherNet/IP
Transmission speed	10/100Mbps	
I/F Connector	RJ-45(2ports)	
Topology	Software(Bootp/Server)	
IP setup	Bus, Star	
Max. expansion module	8ea	
Max. digital I/O point	256 points	
Max. analog I/O channel	32ch (Input 16ch, Output 16ch)	
Rated voltage	DC 24V	
Operating Range	DC19.2 ~ 28.8V	
Rated current	1.5A	
Insulation	Non-Insulation, Comm. Part insulation	

System configuration

Items	Description	Max. I/O point		
Digital I/O	XBE-DC08A	DC24V input 8pt	Max. 256 points	
	XBE-DC16A	DC24V input 16pt		
	XBE-DC32A	DC24V input 32pt		
	XBE-RY08A	Relay output 8pt		
	XBE-RY16A	Relay output 16pt		
	XBE-TN08A	Tr output 8pt, Sink		
	XBE-TP08A	Tr output 8pt, Source		
	XBE-TN16A	Tr output 16pt, Sink		Max. 256 points
	XBE-TP16A	Tr output 16pt, Source		
	XBE-TN32A	Tr output 32pt, Sink		
XBE-TP32A	Tr output 32pt, Source			
XBE-DN16A	DC24V input 8pt, Tr output 8pt			
XBE-DN16A	DC24V input 8pt, Tr output 8pt			
Analog, Temperature	XBF-AD04A	Current/Voltage input 4Ch	Input Max. 16ch Output Max. 16ch	
	XBF-DC04A	Current output 4Ch		
	XBF-DV04A	Voltage output 4Ch		
	XBF-RD04A	RTD input 4Ch		
	XBF-TC04S	TC input 4Ch		


* When Digital input and Analog input is used together or Digital output Analog output is used, configure the system within 32bytes
(Ex) If 4ch analog input is used, Digital input can be used max. 192points

Externals and inscriptions

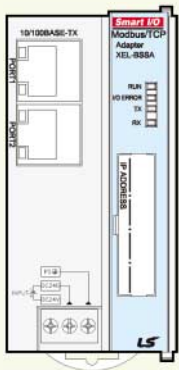

Item	LED status
RUN	Operation status
	On: Normal operation Off: Abnormal operation
I/O ERROR	Interface status of expansion module
	On: Expansion module error Off: Normal operation
TX	Data send status to master
	On: Under transmission Off: No data
RX	Data receive status from master
	On: Under receiving Off: No data

Dimension

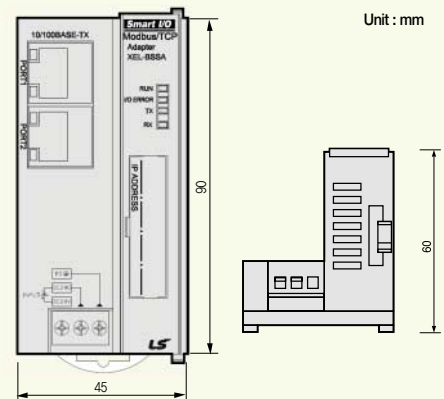

Features

- Max. 63 stations
- Flexible connection via DeviceNet
- Utilize same I/O modules with XGB
 - Max. 512 I/O points
 - Max. 32 channels analog input/output



Specification

Items		Description		
Communication Specification		Poll, Bit-strobe, COS/Cyclic		
		Group 2 only slave		
		Auto baud rate		
Module's Type		Slave		
Max. Node Number (MAC ID)		64(0~63)		
Number of Expansion I/O Slots		8		
Max. DC I/O Data Size		Input:32bytes / Output:32bytes		
Max. Analog Channels		Input : 16Channels / Output : 16Channels		
Speed & Distance	Comm. Speed	125 kbps	250 kbps	500 kbps
	Distance	500 m	250 m	100 m
Input Power	System Power		DC 24V	
	Range		19.2V ~ 28.8V(11V operate)	
	Output Voltage/Current		5V(±20%) / 1.5A	
Weight(g)		100		


* When I/O module is installed, check the current consumption (Max. Current: 1.5A)

System configuration

Items	Description	Max. I/O point	
Digital I/O	XBE-DC08A	DC24V input 8pt	256points
	XBE-DC16A	DC24V input 16pt	
	XBE-DC32A	DC24V input 32pt	
	XBE-RY08A	Relay output 8pt	
	XBE-RY16A	Relay output 16pt	
	XBE-TN08A	Tr output 8pt, Sink	
	XBE-TP08A	Tr output 8pt, Source	
	XBE-TN16A	Tr output 16pt, Sink	
	XBE-TP16A	Tr output 16pt, Source	
	XBE-TN32A	Tr output 32pt, Sink	
	XBE-TP32A	Tr output 32pt, Source	
	Analog, Temperature	XBF-DN16A	
XBF-AD04A		Current/Voltage input 4Ch	
XBF-DC04A		Current output 4Ch	
XBF-DV04A		Voltage output 4Ch	
XBF-RD04A		RTD input 4Ch	
XBF-TC04S	TC input 4Ch		


* When Digital input and Analog input is used together or Digital output Analog output is used, configure the system within 32bytes (Ex) If 4ch analog input is used, Digital input can be used max. 192points

Externals and inscriptions



Item	LED status
RUN	ON : Normal
	OFF : Module error
I/O ERROR	ON : I/O module error
	OFF : Normal
MS	Green ON: Normal
	Green blink: Normal
	Red ON: Module error
NS	Green ON: Normal
	Green blink: Waiting
	Green off: Comm. stop
	Red ON: Network error
	Red blink: Disconnect

Dimension

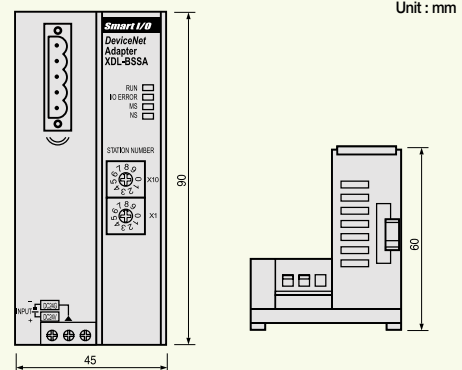

Unit : mm

Network / SMART I/O (Profibus-DP adapter)

Features

- Max. 100 stations (32stations per segment)
- Flexible connection via Profibus
- Utilize same I/O modules with XGB
 - Max. 512 I/O points
 - Max. 32 channels analog input/output



Specification

Item	Performance Specification	
Transmission	Standard	EN50170 / DIN 19245
	Interface	RS-485(Electric)
	Media Access	Polling
	Topology	BUS
	Encoding Method	NRZ
	Interface	Sync mode , Freeze mode Auto baud rate
	Master/Slave	Slave
	Cable Type	Twisted Pair Shielded Cable
	Kbps	9.6 19.2 93.75 187.5 500
		1200 1200 1200 1000 400
	Distance	1500 3000 6000 12000 -
		200 100 100 100 -
	Max. Node Number	100 (0 ~ 99)
	Number of Expansion	8
I/O Slots	8	
IO Data Size	64bytes (Input:32bytes /Output:32bytes)	
Number of Analog Channels	32Channels (Input : 16Channels/Output :16Channels)	
Input Power	System Power	Supply Voltage : DC 24Vdc 19.2 ~ 28.8Vdc
	Output Voltage/ Current	5V(±20%) / 1.5A
Weight(g)	100	


* When I/O module is installed, check the current consumption (Max. Current: 1.5A)

System configuration

Item	Description	Max. I/O point	
Digital I/O	XBE-DC08A	DC24V input 8pt	256points
	XBE-DC16A	DC24V input 16pt	
	XBE-DC32A	DC24V input 32pt	
	XBE-RY08A	Relay output 8pt	
	XBE-RY16A	Relay output 16pt	
	XBE-TN08A	Tr output 8pt, Sink	
	XBE-TP08A	Tr output 8pt, Source	
	XBE-TN16A	Tr output 16pt, Sink	
	XBE-TP16A	Tr output 16pt, Source	
	XBE-TN32A	Tr output 32pt, Sink	
Analog, Temperature	XBE-TP32A	Tr output 32pt, Source	16channels
	XBE-DN16A	DC24V input 8pt , Tr output 8pt	
	XBF-AD04A	Current/Voltage input 4Ch	
	XBF-DC04A	Current output 4Ch	
	XBF-DV04A	Voltage output 4Ch	
	XBF-RD04A	RTD input 4Ch	
XBF-TC04S	TC input 4Ch		


* When Digital input and Analog input is used together or Digital output Analog output is used, configure the system within 32bytes (Ex) If 4ch analog input is used, Digital input can be used max. 192points.

Externals and inscriptions



Item	LED status
RUN	ON : Normal
	Blink: Waiting or comm. error OFF : Module error
I/O ERROR	ON : I/O module error
	OFF : Normal
NET	ON : Data send/receive
	OFF : Disconnection
ERROR	ON : Comm. error
	OFF : Normal

Dimension

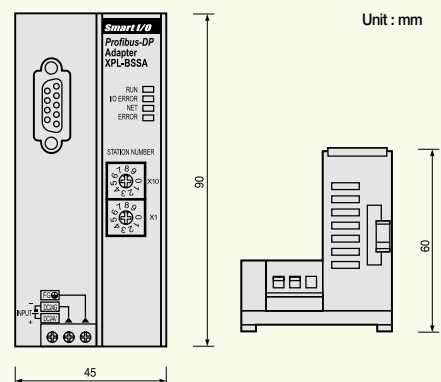

Features

- Max. 63 stations
- LS dedicated protocol (Rnet)
- Utilize same I/O modules with XGB
 - Max. 512 I/O points
 - Max. 32 channels analog input/output



Specification

Item	Performance Specification	
Transmission	Tran. Rate	1Mbps
	Transmission Path	Bus type
	Method	750m
	Max. Cable Length	5 pin connector
	Connector type	Twisted Pair Shielded Cable
	Cable type	32(non-used repeater),
	No. of Station	64(used repeater)
	(Included Master)	512(Input : 256, Output: 256)
	Max. Digital I/O points	96
	Max. Analog I/O points	Digital I/O 8
	Number of I/O Slots	Analog I/O 4
	Selection of Latch/Clear	handling of mode change switch
Rated Voltage/current	DC24V/0.55A	
Weight (g)	100	


* When I/O module is installed, check the current consumption (Max. Current: 1.5A)

System configuration

Item	Description	Max. I/O point	
Digital I/O	XBE-DC08A	DC24V input 8pt	256points
	XBE-DC16A	DC24V input 16pt	
	XBE-DC32A	DC24V input 32pt	
	XBE-RY08A	Relay output 8pt	
	XBE-RY16A	Relay output 16pt	
	XBE-TN08A	Tr output 8pt, Sink	
	XBE-TP08A	Tr output 8pt, Source	
	XBE-TN16A	Tr output 16pt, Sink	
	XBE-TP16A	Tr output 16pt, Source	
	XBE-TN32A	Tr output 32pt, Sink	
	XBE-TP32A	Tr output 32pt, Source	
	XBE-DN16A	DC24V input 8pt , Tr output 8pt	
Analog, Temperature	XBF-AD04A	Current/Voltage input 4Ch	16channels
	XBF-DC04A	Current output 4Ch	
	XBF-DV04A	Voltage output 4Ch	
	XBF-RD04A	RTD input 4Ch	
	XBF-TC04S	TC input 4Ch	


* When Digital input and Analog input is used together or Digital output Analog output is used, configure the system within 32bytes
(Ex) If 4ch analog input is used, Digital input can be used max. 192points.

Externals and inscriptions

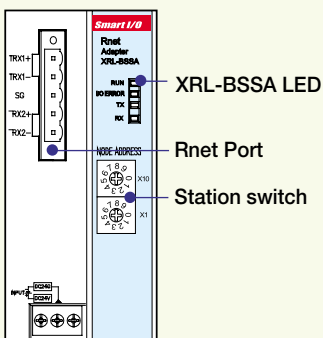


Item	LED status
RUN	ON : Normal OFF : Module error
I/O ERROR	ON : I/O module error OFF : Normal
TX	Data send
RX	Data receive

Dimension

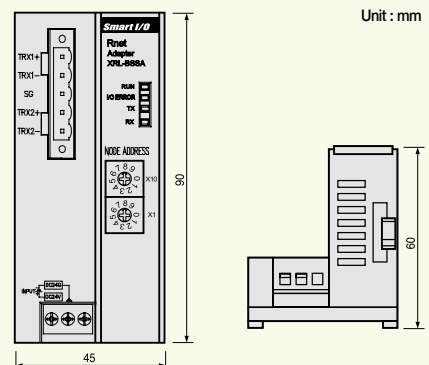


Network / Features


Smart I/O Rnet system

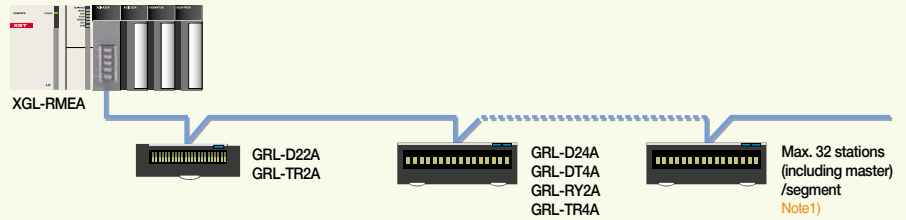


Smart I/O MODBUS system

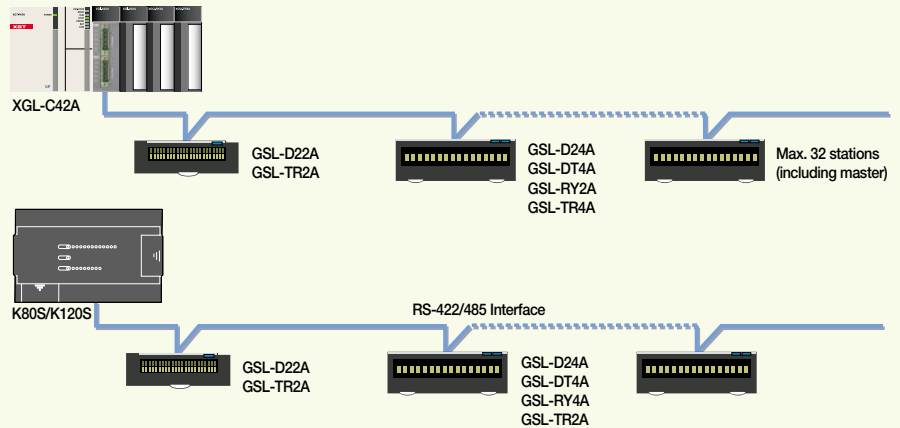

Smart I/O Profibus-DP system

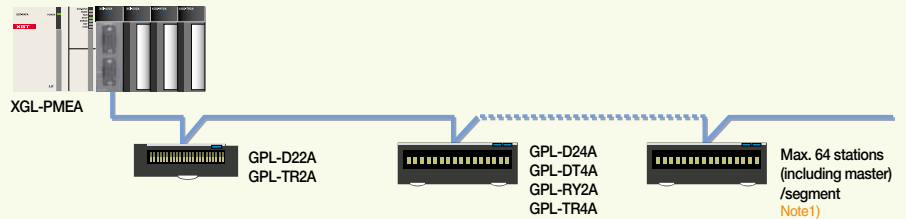


Smart I/O DeviceNet system

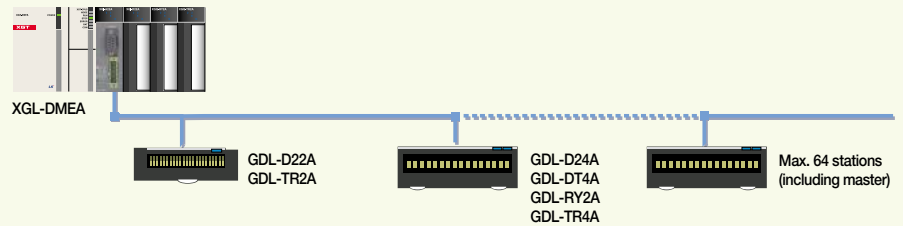

Note1) Segment: Communication section that does not use repeater or second master.

Dimensions

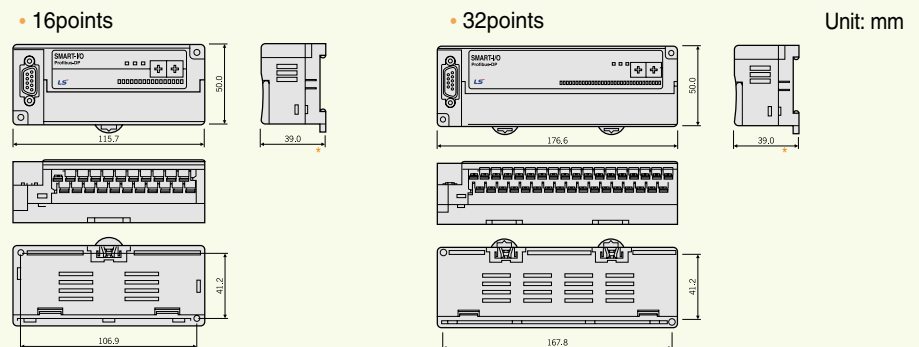

* GxL-RY2 (16-point relay output) module follows the dimension of 32-point module.
* The length of C type Smart I/O is 47.5mm



Special

Special

XGT series offer diverse special modules such as analog, HSC, and positioning to satisfy complicated industrial needs



Revolution of easy to use ...XGT Special module

Fast processing of parameter and data of special module

- Continually refreshing operation data of special module by CPU module
- Including contact points such as conversion data of AD/DA module and command of HSC & positioning module




Easy- to-use (Easy operation parameter setting and data monitoring)

- Convenient parameter setting available through XG5000
- Providing useful functions that can monitor and test operation data and contact points through XG5000

Simple maintenance (Changing online module)

- Without turning off and holding CPU, users can change special module with ease.

Before

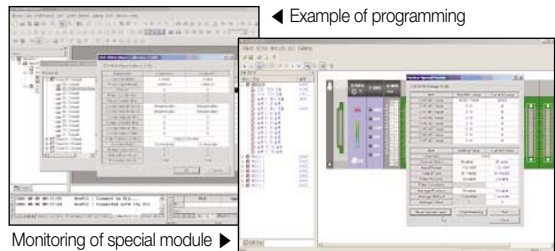

◀ Example of programming

Monitoring of special module ▶

Analog input/output module



Analog input module

XGF-AV8A	8 channels, voltage input
XGF-AC8A	8 channels, current input
XGF-AD4S	4 channels, voltage/current input
XGF-AD8A	8 channels, voltage/current
XGF-AD16A	16 channels, voltage/current input
XGF-AW4S	2-wire, Voltage/ Current input, 4Ch (Isolated)



Analog output module

XGF-DV4A	4 channels, voltage output
XGF-DV4S	4 channels, voltage output, insulation
XGF-DC4A	4 channels, current output
XGF-DC4S	4 channels, current output, insulation
XGF-DV8A	8 channels, voltage output
XGF-DC8A	8 channels, current output

Analog input/output module

XGF-AH6A	Input: 4ch, Voltage/ Current Output: 2Ch Voltage/ Current
----------	--

Temperature module



Temperature input module

XGF-TC4S	4 channels, thermocouple input, Insulation
XGF-RD4A	4 channels, RTD input
XGF-RD4S	4 channels, RTD input, Insulation



Temperature controller

XGF-TC4UD	4 channels input: voltage/current/TC/RTD 8 channels output: current/TR
-----------	---

Positioning module / Motion controller



Positioning module

XGF-PO1A-PO3A	Open collector, 1~3axis
XGF-PD1A-PD3A	Line drive, 1~3axis
XGF-PO1H-PO3H	Open collector, 1~4axis
XGF-PD1H-PD3H	Line drive, 1~4axis



Motion controller

XGF-M16A	MECHATROLINK-II, 16axis
----------	-------------------------

High speed counter module



High-speed counter module

XGF-HO2A	2 channels, Open collector
XGF-HD2A	2 channels, Line driver

Event input module



High-speed counter module

XGF-SOEA	DC24V, 32points
----------	-----------------




Features

- Fast conversion processing
- High resolution
- Setting and monitoring the special module parameter through XG5000
- Supporting 4 types of digital output data format


Specifications

Item	XGF-AV8A (Voltage input)	XGF-AC8A (Current input)	XGF-AD4S (Voltage/Current input)							
No. of input channel	8 channels			4 channels						
Analog input	DC 1~5V, 0~5V, 0~10V, -10~10V	DC 4~20mA, 0~20mA	DC 1~5V, 0~5V, 0~10V, -10~10V DC 4~20mA, 0~20mA							
	Selection of input range in program or SW package (Available to be set per channel)									
Digital output	XGF-AV8A	Analog input		1~5V	0~5V	0~10V	-10~10V			
		Digital output	Unsigned value		0~16,000					
			Signed value		-8000~8,000					
			Precise value		1,000~5,000	0~5,000	0~10,000	-10,000~10,000		
	Percentile value		0~10,000							
	XGF-AC8A	Analog input		4~20mA		0~20mA				
		Digital output	Unsigned value		0~16,000					
			Signed value		-8,000~8,000					
			Precise value		4,000~20,000		0~20,000			
	Percentile value		0~10,000							
	XGF-AD4S	Analog input		1~5V	0~5V	0~10V	-10~10V	4~20mA	0~20mA	
		Digital output	Signed value		-32,000~32,000					
Precise value			1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000	0~20,000		
Percentile value			0~10,000							
Resolution	1/16,000		1/64,000							
	1~5V	0.250mV	4~20mA	1.0μA	1~5V	62.5μV	4~20mA	250nA		
	0~5V	0.3125mV			0~5V	78.1μV				
	0~10V	0.625mV	0~20mA	1.25μA	0~10V	156.3μV	0~20mA	312.5nA		
Accuracy	±0.2% or less (Ambient temperature 25°C)			±0.05% or less (Ambient temperature 25°C)						
	±0.3% or less (Range of operation temperature)			Temp. coefficient ±16.7ppm/°C(Range of operation temperature)						
Conversion speed	250μs/channel									
Max. absolute input	15V	±30mA		Voltage: ±15V, Current: ±30mA						
Insulation method	Photo-coupler Insulation between input terminal and power supply									
	No insulation between channels			Insulation between channels						
Connection terminal	18 points									
No. of occupied	Fixed type (Setting in basic parameter): 64 points									
I/O points	Variable type (Dissolving in basic parameter): 16 points									
Current consumption	420mA			610mA						
Weight (Kg)	0.14									

Configuration

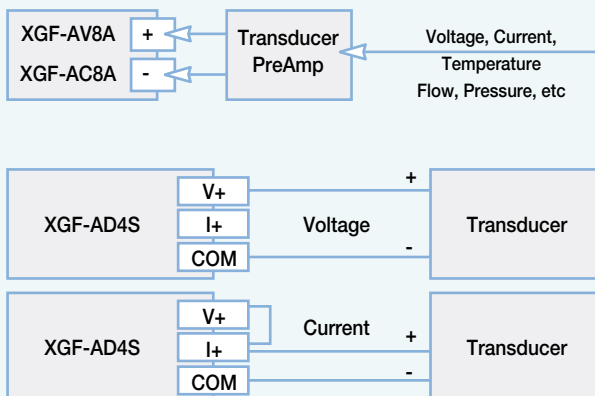

A/D conversion characteristics

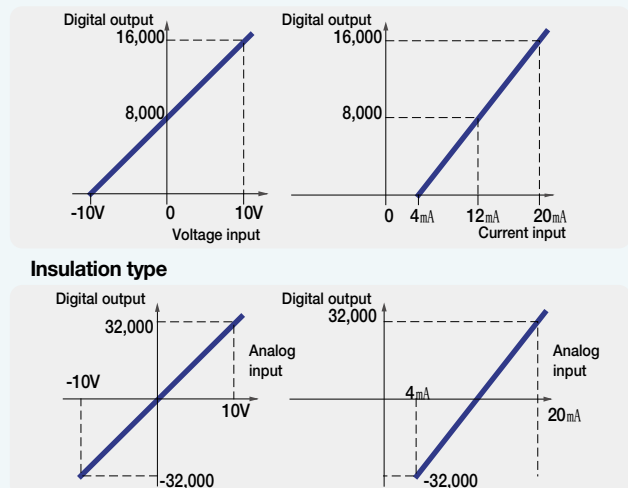

Special module / Analog input module

Features


- Fast conversion processing
- High resolution
- Setting and monitoring the special module parameter through XG5000
- Supporting 4 types of digital output data format




Specifications

Item	XGF-AD16A				XGF-AD8A		
No. of input channel	16 channels				8 channels		
Analog input	Voltage input						
	DC 1~5V, DC 0~5V, DC 0~10V, DC -10~10V (Input resistance: 1MΩ)						
	Current input						
	DC4~20mA, DC 0~20mA (Input resistance: 250Ω)						
Input selection	Dip switch						
Range selection	Selection of input range in the program or S/W package (Available to set per each channel)						
Digital output	Voltage input				Current input		
	Input type	DC 1~5V	DC 0~5V	DC 0~10V	DC -10~10V	DC 4~20mA	DC 0~20mA
	Unsigned value	0~16,000					
	Signed value	-8,000~8,000					
	Precise value	0~10,000					
	Percentile value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000	0~20,000
	Resolution(1/16000)	0.2500mV	0.3215mV	0.6250mV	1.250mV	1.00μA	1.25μA
	Range selection	Selection of input type by program or parameter (Available to be set per each channel)					
Resolution	±0.2% or less (Ambient temperature 25°C), ±0.3% or less (Range of operation temperature)						
Max. absolute input	±15V				±30mA		
Conversion speed	500μs/channels				250μs/channels		
Insulation method	Photo-coupler insulation between terminal and power supply						
Terminal	32 points				18 points		
No. of occupied I/O points (XGK)	Fixed type (Setting in basic parameter): 64 points				Variable type (Dissolving in basic parameter): 16 points		
Current consumption	DC 5V : 420mA						
Wight	140g						

Configuration



A/D conversion characteristics

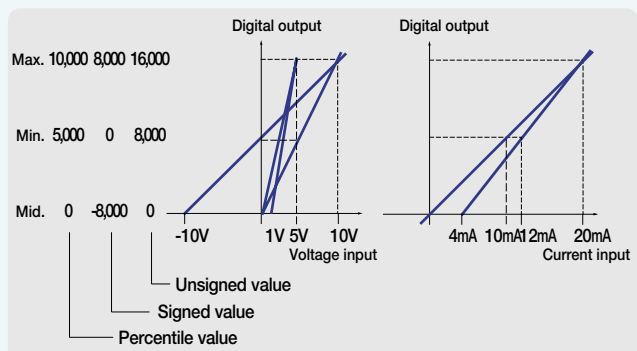

Features

- 2Wire sensor (transmitter) input
- 1/64000 resolution
- Channel insulation
- Various additional functions




Specifications


Item		XGF-AW4S		
No. of input channel		4channels		
Voltage input		DC 1~5V(Input resistance: 11kΩ)		DC 4~20mA(Input resistance : 250 Ω)
Digital output	Signed value	-32,000~32,000		-32,000~32,000
	Precise value	1,000~5,000		4,000~20,000
	Percentile value	0~10,000		0~10,000
	Resolution(1/64000)	0.25mV		1uA
	Range selection	Selection of input range in program or S/W package (Available to be set per channel)		
Resolution		±0.05% or less (Ambient temperature 25° C), Temp. coefficient ±70ppm/° C(Range of operation temperature)		
Max. absolute input		±6V		±30mA
Conversion speed		10ms/4channels		
Insulation	Item	Method	Withstand voltage	Resistance
	Channel	Transformer	500VAC, 50/60Hz, 1min, Leakage current: 10mA or less	500VDC, 10kΩ or more
	Terminal - Power	Photo-coupler		
Transmitter	Voltage	DC 24V ± 15%		
	Max. current	30mA		
	Short circuit protection	Limit current: 25 ~35mA		
External power		DC 24V + 20%, -15%		
Terminal		18 point terminal		
No. of occupied I/O points (XGK)		Fixed type (Setting in basic parameter): 64 points, Variable type (Dissolving in basic parameter): 16 points		
Current consumption	DC 5V	180mA		
	DC 24V	480mA		
Wight		140		

Configuration


2-Wire Current input




4-Wire Current input




Current input



Voltage input




A/D conversion characteristics

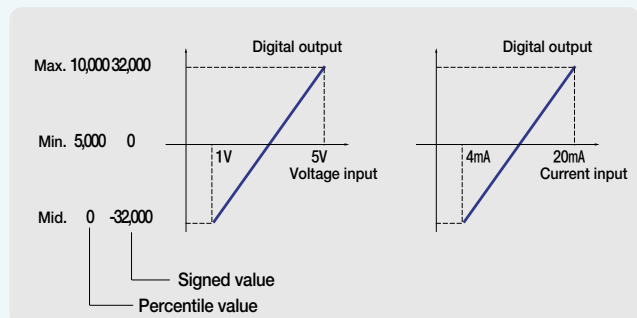


Special module / Analog input module (Example)

This is a simple example to start Analog input module setting. For more details, refer to user's manual.

System configuration

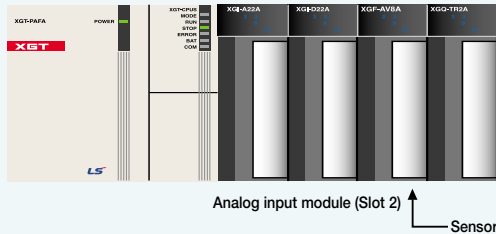

Wiring

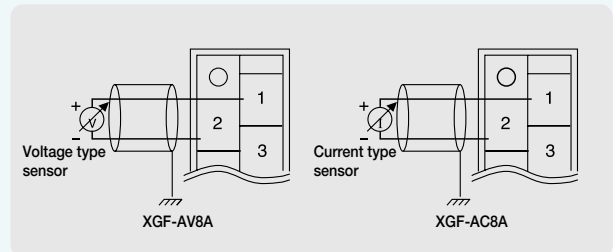

Parameter setting

In the parameter setting box, select slot and analog module that you want to use.
(This example shows to select '0' channel of voltage input type.)

Parameter	CH 0
<input type="checkbox"/> Channels	Disable
<input type="checkbox"/> Input Range	1~5V
<input type="checkbox"/> Output Type	0~16000
<input type="checkbox"/> Filter Process	Disable
Filter Constants	1
<input type="checkbox"/> Average Process	Disable
<input type="checkbox"/> Average Method	Count-Avr
Average Value	2

Press the <Details> button at lower end of parameter setting box after selecting the module.

You need to fill out each item suitable for your system.

Programming

Create a program for A/D conversion (0~10V to 0~16,000).

Special devices for programming


Refer to user's manual for more details.

U02.0.0: Error

U02.11.0: Requesting error-clear

U02.02: Memory of channel A/D value

Uxy.aa.bb
 x: Base number
 y: Slot number
 aa,bb: Refer to user's manual.

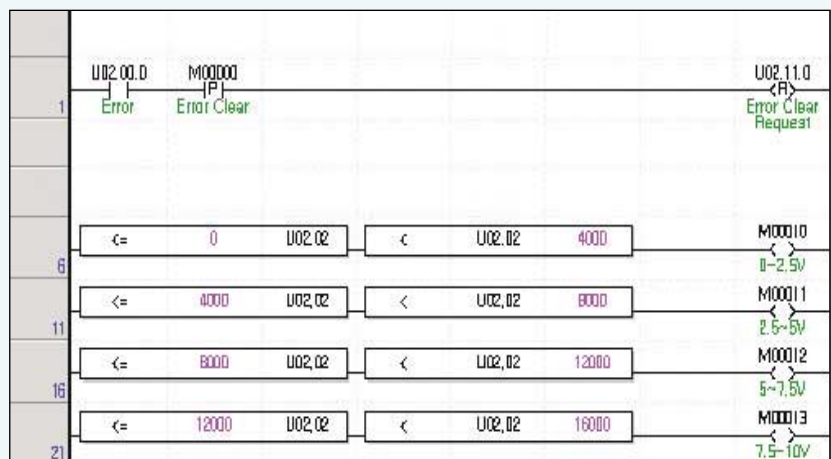

Special

Features


- Fast conversion processing
- High resolution
- Setting and monitoring the special module parameter through XG5000
- Supporting 4 types of digital input data format




Specifications

Item	XGF-DV4A, XGF-DV8A, XGF-DV4S (Voltage output type)			XGF-DC4A, XGF-DC8A, XGF-DC4S (Current output type)			
No. of output channel	XGF-DV4A/4S, XGF-DC4A/4S : 4 channels / XGF-DV8A, XGF-DC8A : 8 channels						
Analog output range	DC 1~5V, 0~5V			DC 4~20mA			
	DC 0~10V, -10~10V			DC 0~20mA			
	Selection of input range in the program or S/W package (Available to set per each channel)						
Digital input range	Analog output	Voltage type		1~5V	0~5V	0~10V	-10~10V
		Digital input	Unsigned value	0~16,000			
			Signed value	-8,000~8,000			
			Precise value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000
	Percentile value		0~10,000				
	Analog output	Current type		4~20mA		0~20mA	
		Digital input	Unsigned value	0~16,000			
			Signed value	-8,000~8,000			
Precise value			4,000~20,000		0~20,000		
Percentile value	0~10,000						
16-bit binary value: selection of input type by program or parameter (Available to be set per each channel)							
Max. resolution	1/16,000 (Per each input range)						
	1~5V	0.250mV	4~20mA		1.0μA		
	0~5V	0.3125mV					
	0~10V	0.625mV	0~20mA		1.25μA		
	±10V	1.250mV					
Accuracy	XGF-DV4A/8A, DC4A/8A : ±0.2% or less (Ambient temperature 25°C), ±0.3% or less (Range of operation temperature)						
	XGF-DV4S/DC4S : ±0.1% or less (Ambient temperature 25°C), temp coefficient: ±80ppm/°C						
Conversion speed	250μs/channel						
Max. absolute output	±15V			±24mA			
Insulation method	Photo-coupler insulation between terminal and power supply XGF-DV4A/8A, XGF-DC4A/8A: No insulation between channels XGF-DV4S, XGF-DC4S (Insulation type): Insulation between channels						
Connection terminal	18 point terminal						
No. of occupied points	Fixed type (Setting in basic parameter): assign 64 points						
	Variable type (Dissolving in basic parameter): assign 16 points						
Current consumption (mA)		DV4A	DV8A	DV4S	DC4A	DC8A	DC4S
	Internal	190	190	200	190	190	200
	External	140	180	150	210	300	220
Weight (Kg)	0.15						


Output wiring

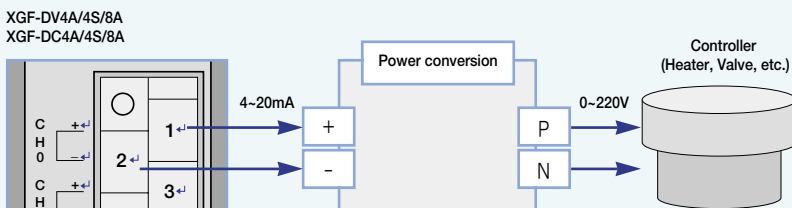

I/O conversion characteristics

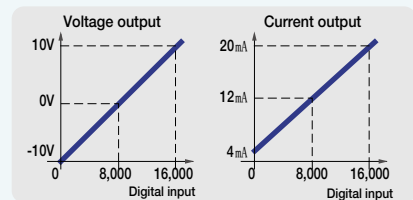


Insulation type

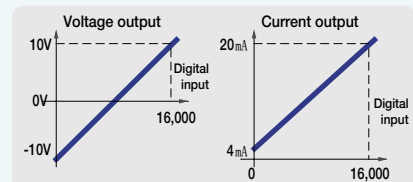


Special module / Analog output module (Example)

This is a simple example to start Analog output module setting. For more details, refer to user's manual.

System configuration

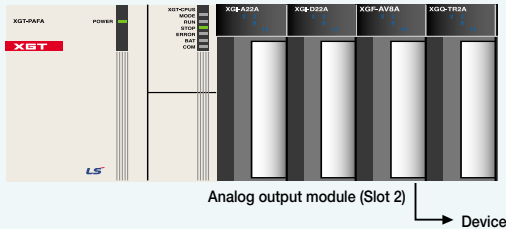


Wiring

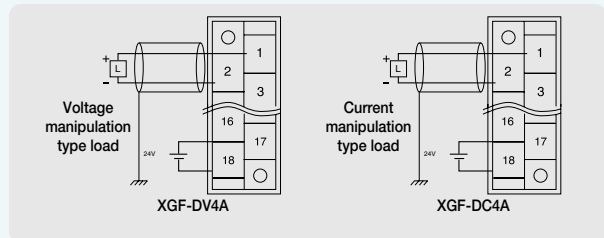


Parameter setting

In the parameter setting box, select slot and analog module that you want to use. (This example shows to select '0' channel of voltage output type.)

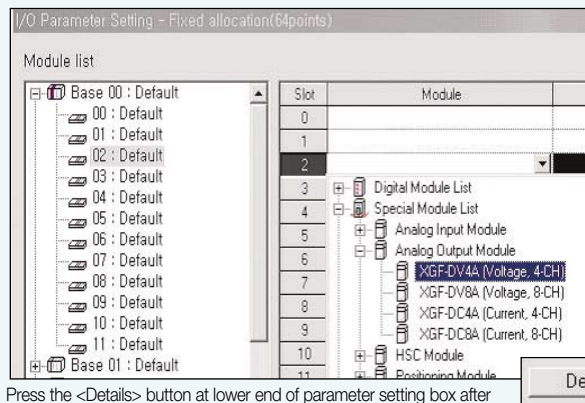

Press the <Details> button at lower end of parameter setting box after selecting the module.



You need to fill out each item suitable for your system.

Programming

Create a program for D/A conversion (0~16000 to 0~10V).


Special devices for programming

Refer to user's manual for more details.

U02.02.0: Admitting Channel 0 output

U02.03: Output data of channel 0

Uxy.aa.bb
 x: Base number
 y: Slot number
 aa,bb: Refer to user's manual.

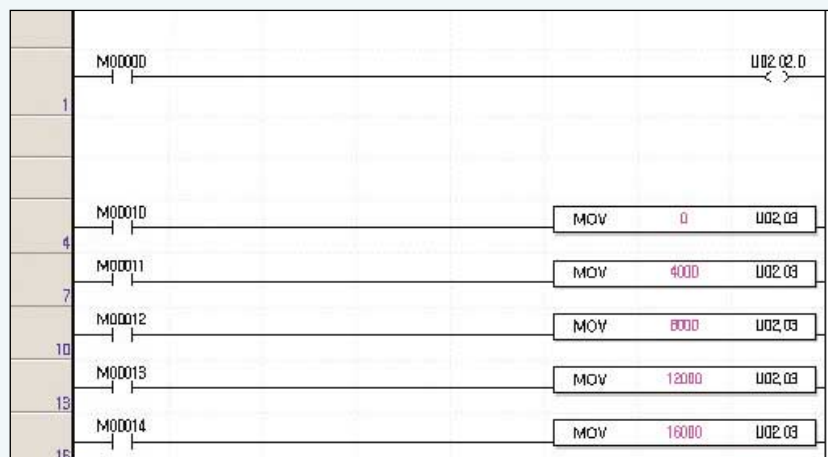

Special

Features





- Input 4channels Output 2channels
- 4channels, 1/8000 resolution
- Parameter setting and monitoring by XG5000



Specifications

Item		XGF-AH6A					
Input	No. of input channel	4channels					
	Analog output	Range	DC1~5V	DC0~5V	DC0~10V	DC-10~10V	DC4~20mA
		Resistance					250 Ω
		Selection					V+ and COM
	Digital output	Unsigned value					0~8,000
		Signed value					-4,000~4,000
		Precise value					0~10,000
		Percentile value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000
		Resolution(1/8000)	0.5mV	0.625mV	1.25mV	2.5mV	2.0uA
		Range selection	Selection of input range in program or S/W package (Available to be set per channel)				
	Resolution	±0.2% or less (Ambient temperature 25°C), ±0.3% or less (Range of operation temperature)					
	Max. absolute input					±15V	±30mA
Conversion speed	500us/channels						
Output	No. of input channel	2channels					
	Analog output	Range	DC1~5V	DC0~5V	DC0~10V	DC-10~10V	DC4~20mA
		Resistance					600 Ω or less
		Selection					V+ and COM
	Digital output	Unsigned value					0~8,000
		Signed value					-4,000~4,000
		Precise value					0~10,000
		Percentile value	1,000~5,000	0~5,000	0~10,000	-10,000~10,000	4,000~20,000
		Resolution(1/8000)	0.5mV	0.625mV	1.25mV	2.5mV	2.0uA
		Range selection	Selection of input range in program or S/W package (Available to be set per channel)				
	Resolution	±0.2% or less (Ambient temperature 25°C), ±0.3% or less (Range of operation temperature)					
	Max. absolute input					±15V	±24mA
Conversion speed	500us/channels						
Insulation method	Photo-coupler insulation between terminal and power supply						
Terminal	18 point terminal						
No. of occupied I/O points (XGK)	Fixed type (Setting in basic parameter): 64 points, Variable type (Dissolving in basic parameter): 16 points						
Current consumption (DC5V)	770mA						
Wight	140						

Wiring

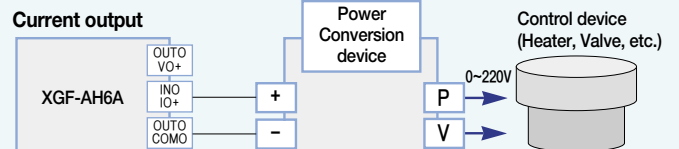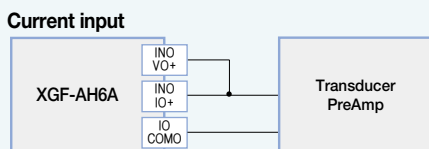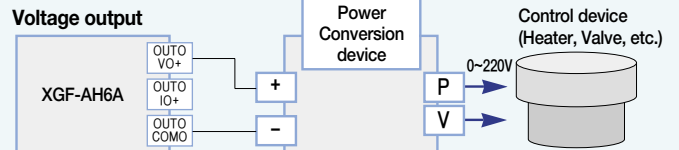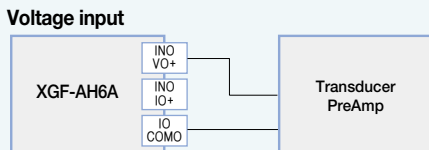

Special module / High-speed counter module

Features

- Parameter setting and monitoring using XG5000
- Incremental encoder available
- Supporting various pulse input (5V, 12V, 24V)
- Various multiplication (1/2 phase pulse input)
- External present input
- Providing function to prevent from counting external signal
- Supporting HTL-level incremental encoder in the line-drive input type



Specifications

Item		Specification			
		XGF-HO2A			XGF-HD2A
No. of command	Signal	A Phase, B Phase			
	Input type	Voltage input (Open Collector)			Differential input (Line Driver)
	Signal level	DC 5/12/24V			RS-422 Line Drive/HTL LEVEL Line Drive
	Input voltage	24V DC (17.0V ~ 26.4V)	12V DC (9.8V ~ 13.2V)	5V DC (4.5V ~ 5.5V)	Line Driver RS-422 Line Drive HTL Level Line Drive
	Input current	7~11mA	7~11mA	7~11mA	
	Min. On guaranteed voltage	17.0V	9.8V	4.5V	
	Max. Off guaranteed voltage	4.5V	3.0V	1.7V	
Counter enable	Set by program (Count only in 'Enable')				
Max. counting speed	200Kpps			500Kpps (HTL input: 250Kpps)	
No. of channels	2 channels				
Counting range	Signed 32 Bit (-2,147,483,647 ~ 2,147,483,647)				
Counting type	Linear count				
(Program setting)	(Generating Carry/Borrow when exceeding counting range, Max/Min value)				
Input mode	1 Phase input				
(Program setting)	2 Phase input				
	CW/CCW input				
Signal type	Voltage				
Up/Down counter setting	1-phase input	Program or B-phase			
	2-phase input	Phase difference			
	CW/CCW	A-phase input: Up count B-phase input: Down count			
Multiplication	1-phase input	1/2 multiplication (Programming)			
	2-phase input	1/2/4 multiplication (Programming)			
	CW/CCW	1 multiplication			
Control input	Signal	Preset signal, Signal to admit additional signal (Setting by terminal block or programming)			
	Signal level	DC 5V/12V/24V input type (Selecting terminal)			
	Signal type	Voltage			
External output	No. of output point	2 points/channel: Terminal output available			
	Type	Single comparison (>,>=,=,<=,<) or section comparison			
	Output type	Open Collector (Sink)			
Operating status display	Input signal	A-phase, B-phase, Preset signal, Signal to admit additional signal			
	Output signal	OUT1, OUT2			
	Operation status	Module Ready, Pulse input status of A, B phase			
Addition functions (Program setting)	<ul style="list-style-type: none"> • Count clear, Count latch • Section count (Set time value:1~60000ms) • Measuring counting number per a unit time (Set time value:1~60000ms) • Preventing from counting (Setting by internal/external input during counting) 			• Pulse frequency count (Each input channel)	
No. of occupied I/O points	Fixed type (Setting in basic parameter): 64 points				
	Variable type (Dissolving in basic parameter): 16 points				
Terminal block	40-pin connector				
Current consumption	270			330	
Weight (Kg)	0.09				

Terminal block configuration



XGF-HO2A

Pin layout	Pin number		Signal name	
	CH0	CH1		
CH0	A12V	A24V	1 17 A12V A phase DC12V input	
	A_C	A5V	2 18 A24V A phase DC24V input	
	B12V	B24V	3 19 A_C A phase COM	
	B_C	B5V	4 20 A5V A phase DC5V input	
	P12V	P24V	5 21 B12V B phase DC12V input	
	P_C	P5V	6 22 B24V B phase DC24V input	
	G12V	G24V	7 23 B_C B phase COM	
	G_C	G5V	8 24 B5V B phase DC5V input	
	CH1	A12V	A24V	9 25 P12V Preset DC12V input
		A_C	A5V	10 26 P24V Preset DC24V input
B12V		B24V	11 27 P_C Preset COM	
B_C		B5V	12 28 P5V Preset DC5V input	
P12V		P24V	13 29 G12V Gate DC12V input	
P_C		P5V	14 30 G24V Gate DC24V input	
G12V		G24V	15 31 G_C Gate COM	
G_C		G5V	16 32 G5V Gate DC5V input	
OUT1		OUT0	33 35 OUT1 Comparison output OUT1	
24V		24V	34 36 OUT0 Comparison output OUT0	
24G	24G	37 38 24V External power supply		
		39 40 24G DC24V		

XGF-HD2A

Pin layout	Pin number		Signal name	
	CH0	CH1		
CH0	AI-	AI+	1 17 AI- AI-Input (LINE DRIVE TTL LEVEL Input)	
	AIi-	AIi+	2 18 AI+ AI+Input (LINE DRIVE TTL LEVEL Input)	
	BI-	BI+	3 19 AIi- AIi-Input (LINE DRIVE HTL LEVEL Input)	
	BIi-	BIi+	4 20 AIi+ AIi+Input (LINE DRIVE HTL LEVEL Input)	
	P12V	P24V	5 21 BI- BI- Input (LINE DRIVE TTL LEVEL Input)	
	P_C	P5V	6 22 BI+ BI+Input (LINE DRIVE TTL LEVEL Input)	
	G12V	G24V	7 23 BIi- BIi-Input (LINE DRIVE HTL LEVEL Input)	
	G_C	G5V	8 24 BIi+ BIi+Input (LINE DRIVE HTL LEVEL Input)	
	CH1	AI-	AI+	9 25 P12V Preset DC12V input
		AIi-	AIi+	10 26 P24V Preset DC24V input
BI-		BI+	11 27 P_C Preset COM	
BIi-		BIi+	12 28 P5V Preset DC5V input	
P12V		P24V	13 29 G12V Gate DC12V input	
P_C		P5V	14 30 G24V Gate DC24V input	
G12V		G24V	15 31 G_C Gate COM	
G_C		G5V	16 32 G5V Gate DC5V input	
OUT1		OUT0	33 35 OUT1 Comparison output OUT1	
24V		24V	34 36 OUT0 Comparison output OUT0	
24G	24G	37 38 24V External power supply		
		39 40 24G DC24V		


Configuration

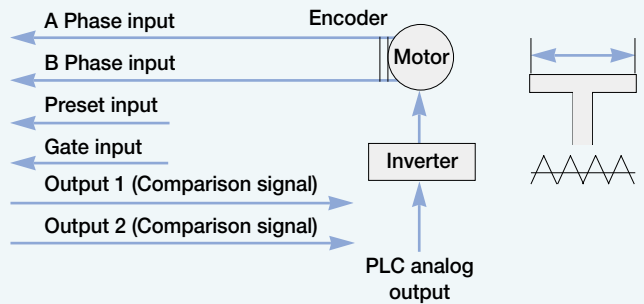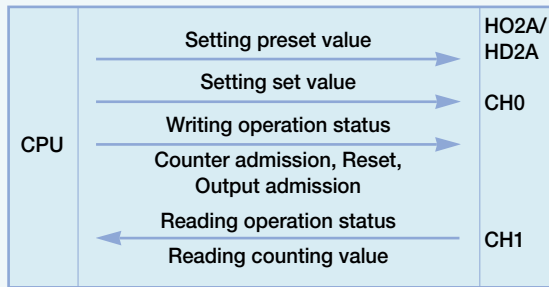


Special module / High-speed counter module (Example)

This is a simple example of high-speed counter module setting.
For more details, refer to user's manual.

System configuration

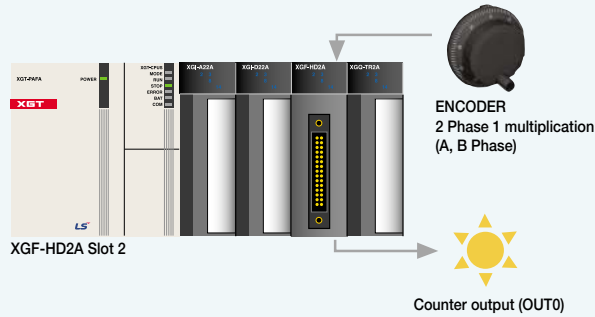

Wiring

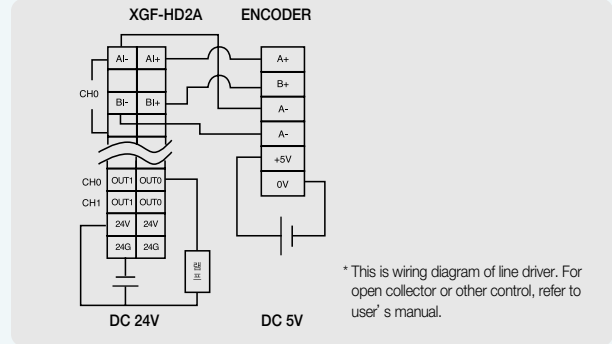


Control configuration

- Light a lamp of output when present value reaches 1000 of pulse input counted by encoder.
- Current value of pulse is saved in D100~D101 and is monitored.

Module test (Online)


- Module test function of XGT enables to monitor operation status of high-speed counter module and to test-run.




Select [Monitor] → [Special Module Monitoring] in menu and appoint high-speed counter.



After pressing the button for [Start Monitoring], press the button [FLAG monitor].

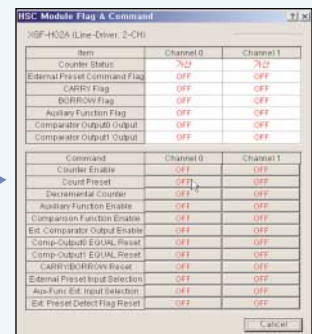

Change [Counter Enable] status to ON.




Check current counting value in 'Monitor Special Module' screen box.

Special module / High-speed counter module (Example)


Parameter setting

- In I/O parameter setting box, select slot and analog module that you want to use.
(This example shows to select 2-channel line driver.)

Press the <Details> button at lower end of parameter setting box after selecting the module.

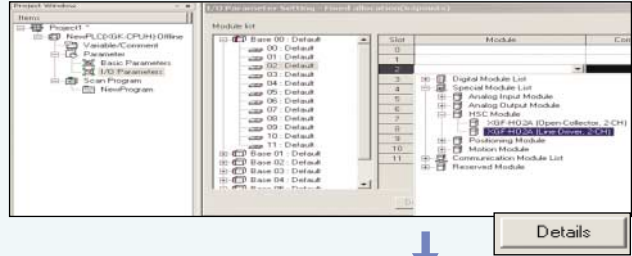

Input 1000 as Max. and Min. comparison output.

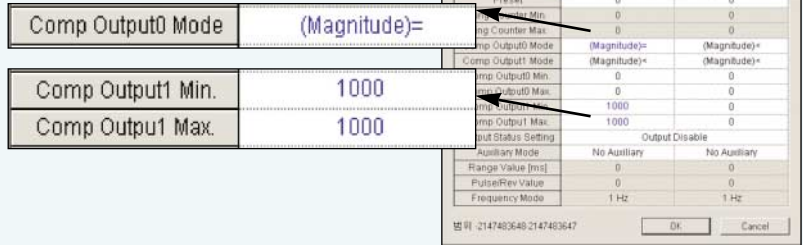

Programming


- After completing programming like following figure, download it to PLC and check operation status.

Special devices for programming


Refer to user's manual for more details.

- U02.23.0: Count operation admission
- U02.23.1: Count preset
- U02.23.4: Consistent output admission
- U02.23.5: Output external terminal admission
- U02.23.6: OUT0 consistent signal reset
- U02.00.6: Contact for checking external output (Practically effective output is outputted through OUT0 terminal)
- U02.02-U02.03: Counter present value


Uxy.aa.bb
 x: Base number
 y: Slot number
 aa,bb: Refer to user's manual

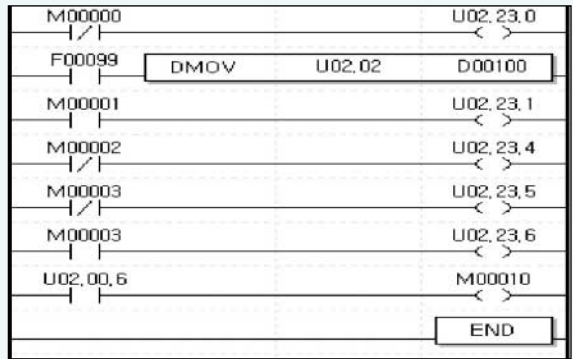

After downloading, monitor operation status.

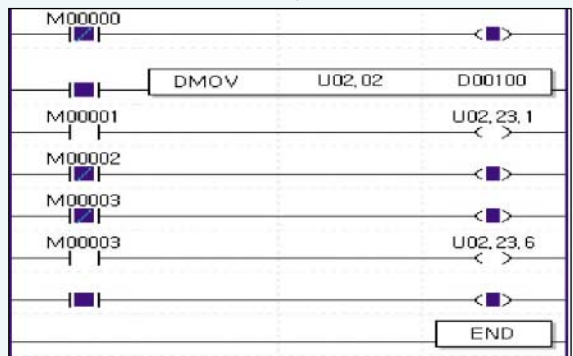

For monitoring just present value, follow the example.

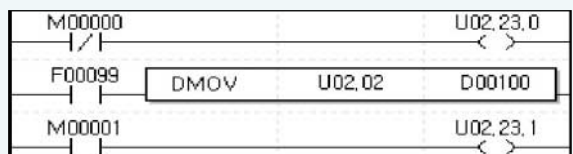

Special module / Positioning module [APM]

Features

- Highly reliable position control with LSIS ASIC-embedded processor
- Enhanced control with fast control processing speed
- High-speed motor control (Max. pulse output: 1Mbps)
- Circular/linear interpolation, separate/synchronous operation
- Trapezoidal & S-curve acceleration/deceleration
- Easy and quick control through external input (JOG operation included)
- Encoder input support
- High-speed processing of command (4ms)
- Easy to set positioning parameters (Windows)
- Monitoring/Tracking/Simulation
- Available to edit operation parameter data in EXCEL
- Self-diagnosis
- Real-time information and solution for each error



Specifications

Item	Specifications			
	XGF-PO1A, XGF-PD1A	XGF-PO2A, XGF-PD2A	XGF-PO3A, XGF-PD3A	
Number of axis	1	2	3	
Interpolation	2-axis linear interpolation, 2-axis circular interpolation		2/3-axis linear interpolation, 2-axis circular interpolation	
Control method	Position control, speed control, speed/position control, position/speed control			
Setting unit	Pulse, mm, inch, degree			
Positioning data	Each axis has 400 data items (Operation step number 1~400). It is available to set with software package or programming.			
Software package	Available (Connected with RS-232C Port of CPU module)			
Data backup	Flash memory (No battery)			
Positioning	Positioning method	Absolute / relative method		
	Position address range	mm	-214748364.8 ~ 214748364.7 (μm)	
		Inch	-21474.83648 ~ 21474.83647	
		Degree	-21474.83648 ~ 21474.83647	
		Pulse	-2147483648 ~ 2147483647	
	Type	XGF-PO□A: Open collector, XGF-PD□A: Line Driver		
	Position speed range	mm	0.01 ~ 20000000.00 (mm/min)	
		Inch	0.001 ~ 2000000.000 (inch/min)	
		Degree	0.001 ~ 2000000.000 (degree/min)	
		Pulse	XGF-PO□A: 1~200,000 (pulse/sec), XGF-PD□A: 1~1,000,000 (pulse/sec)	
Accel/Decel pattern	Trapezoidal & S-curve acceleration/deceleration			
Accel/Decel time	1 ~ 65,535ms			
Max. output pulse	XGF-PO□A: 200Kpps / XGF-PD□A: 1Mpps			
Max. distance	XGF-PO□A: 2m / XGF-PD□A: 10m			
Max. encoder input	200 Kpps			
Error display	LED			
Operation display	LED			
Connection connector	40 Pin connector			
Size of cable	AWG #24			
Occupied points of I/O	64 points (Fixed type), 16 points (Variable type)			
Current consumption (mA)	XGF-PO1A: 340	XGF-PO2A: 360	XGF-PO3A: 400	
	XGF-PD1A: 510	XGF-PD2A: 790	XGF-PD3A: 860	
Weight (kg)	0.12	0.13	0.135	


※ XGF-PO□O: Open Collector type, □: Number of axis
 XGF-PD□D: Line Drive type, □: Number of axis

Terminal block configuration

Pin layout



1 axis

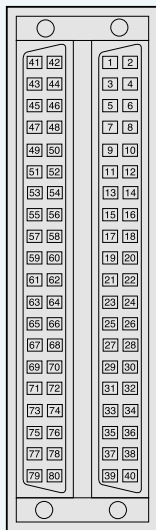

2/3 axes


For	Pin number			Signal name	Signal direction APM - Ext. device	Condition
	X	Y	Z			
A x i s	21	41	61	FP+	Pulse output (Differential +)	→
	22	42	62	FP-	Pulse output (Differential -)	→
	23	43	63	RP+	Pulse sign (Differential +)	→
	24	44	64	RP-	Pulse sign (Differential -)	→
	25	45	65	OV+ *	High limit	←
	26	46	66	OV- *	Low limit	←
	27	47	67	STOP	External stop signal	←
	28	48	68	DOG	Approximate origin	←
	29	49	69	VTP	Speed/Position switching signal	←
	30	50	70	ECMD command signal	Start	←
					Skip	←
					JOG+ (Forward)	←
	31	51	71	JOG-	JOG reverse operation	←
	32	52	72	COM	Common (OV+, OV-, STOP, DOG, VTP, ECMD, JOG-)	↔
	33	53	73	DR/INP	Imposition/Driver Ready signal	←
	34	54	74	DR/INP COM	Imposition/Driver Ready signal Common	↔
35	55	75	HOME +24V	Zero signal (+24V)	←	
36	56	76	NC	Not used		
37	57	77	HOME +5V	Zero signal (+5V)	←	
38	58	78	HOME COM	Zero signal (+24V, +5V) Common	↔	
39	59	79	24V	24V Power supply (Not used in case of line drive output)		
40	60	80	P COM	External 24V GND (Not used in case of line drive output)		
C o m m o n	1			MPG A+	Manual pulse generator/Encoder A+ Input	←
	2			MPG A-	Manual pulse generator/Encoder A- Input	←
	3			MPG B+	Manual pulse generator/Encoder B+ Input	←
	4			MPG B-	Manual pulse generator/Encoder B- Input	←
	5			NC	Not used	←
	6			NC	Not used	←
	7			CON	External simultaneous start	←
	8			EMG *	Emergency stop	←
	9			NC	Not used	
	10			COM	(CON, EMG) Common	↔
	11-20			NC	Not used	




Special module / Positioning module

Connection with MR-J2/J2S-□A

- XGF-PD1/2/3A (Line Driver)

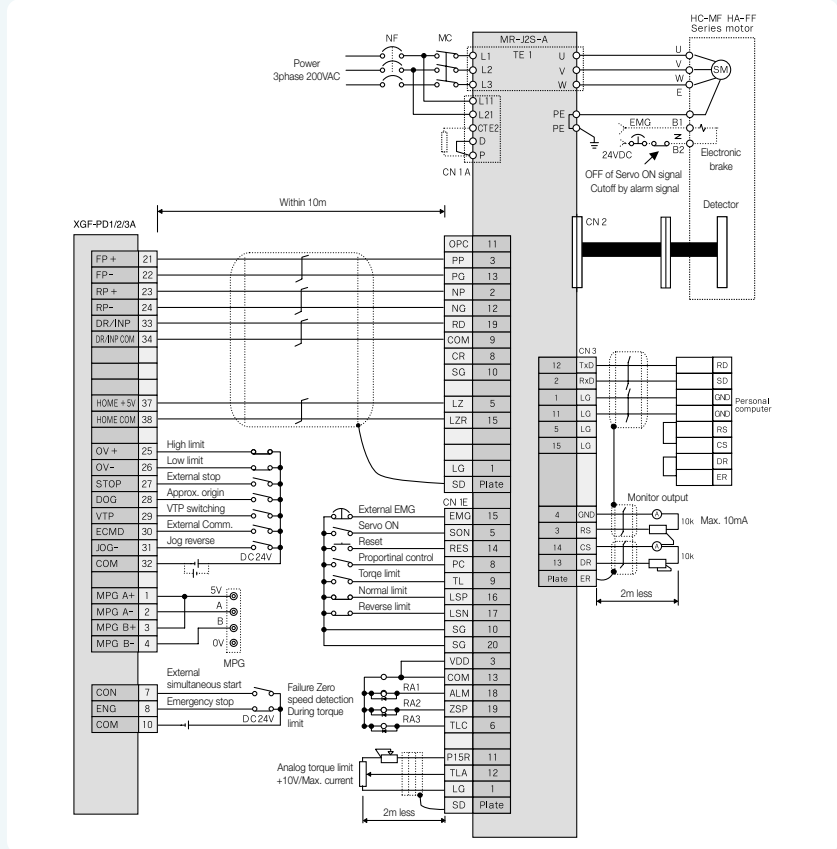


- XGF-PO1/2/3A (Open Collector)

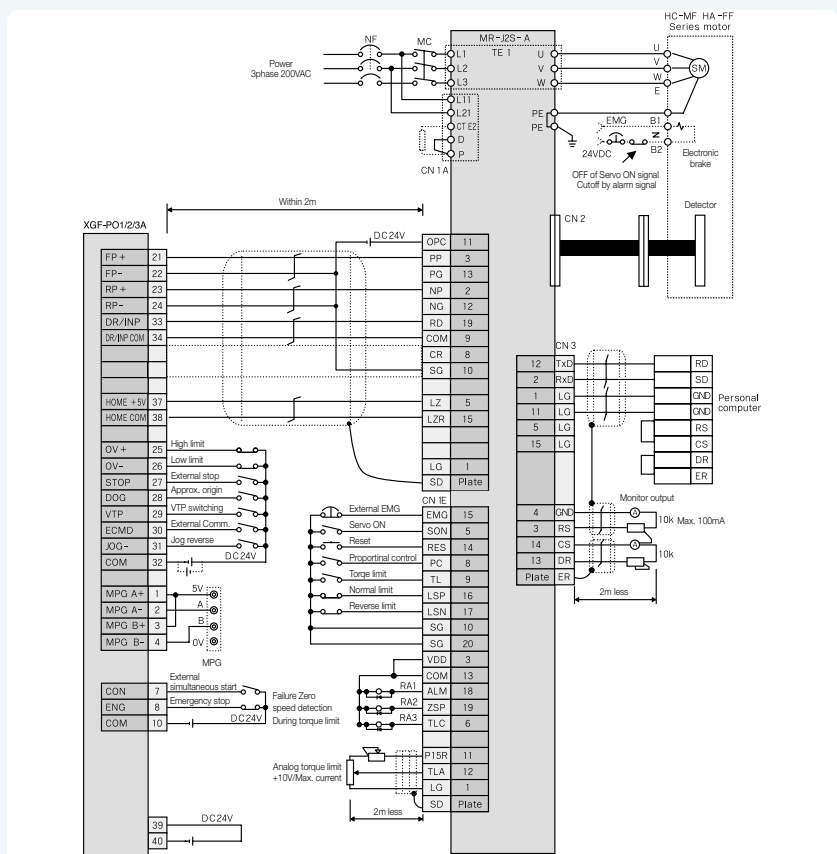

Special


Connection with FDA-3000 AC Servo driver

- XGF-PO1/2/3A (Open Collector)

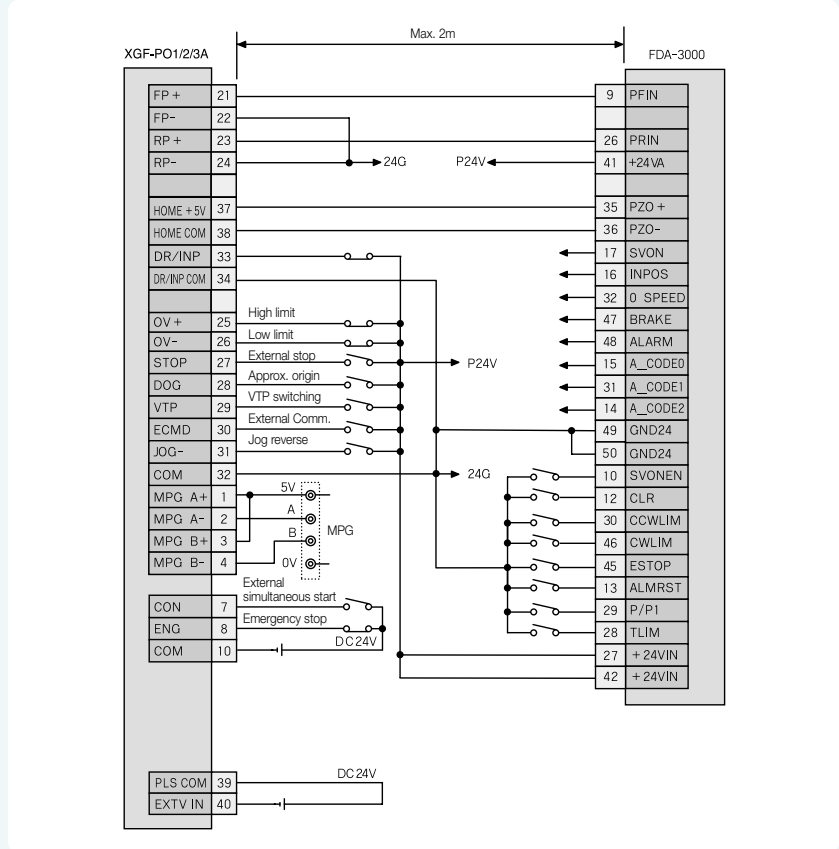


Connection with FDA-5000 AC Servo driver

- XGF-PO1/2/3A (Open Collector)

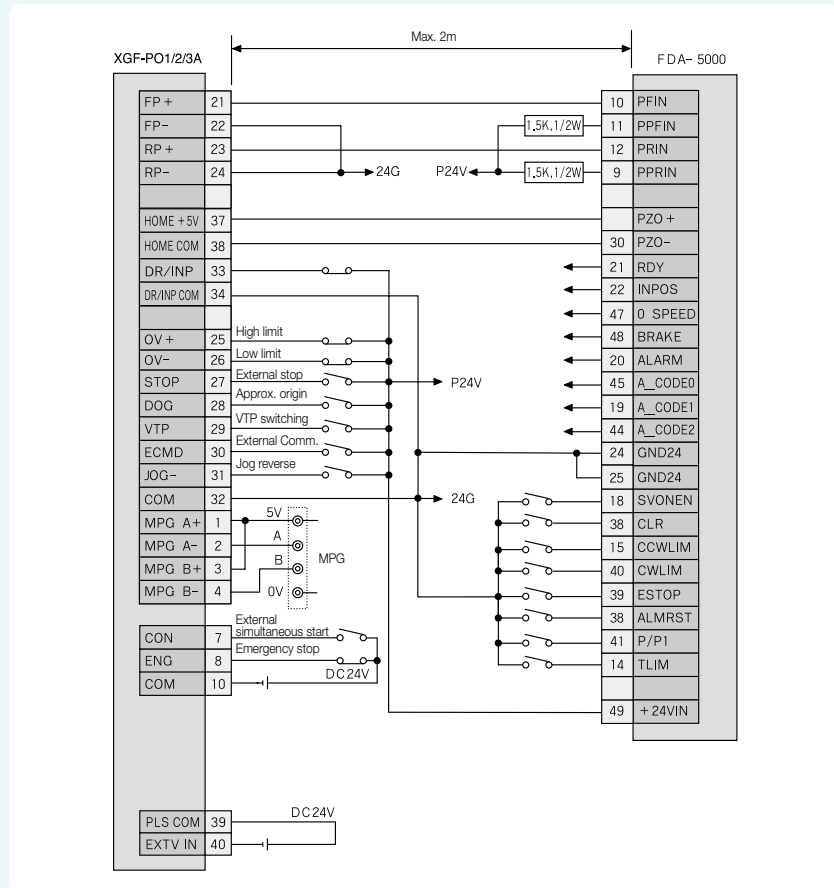

- XGF-PD1/2/3A (Line Driver)

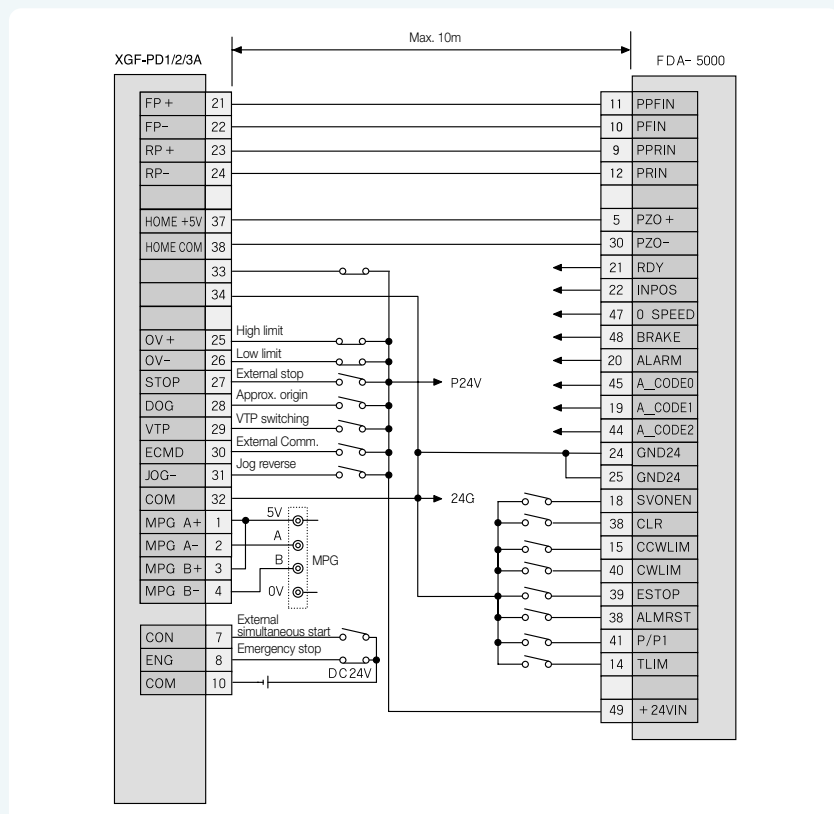


Special

This is a simple example to control 1-axis servo motor.

System configuration

- Positioning system consists of control part, power part, and machinery part.
- Control part: Install APM module on base and complete parameter setting and programming.
- Power part: Power part generates momentum, and it consists of [servo-driver + servo-motor] and [step-driver + step-motor].
- Machinery part: Machinery part is to transport objects, and it can be ball screw, timing belt and rack gear.

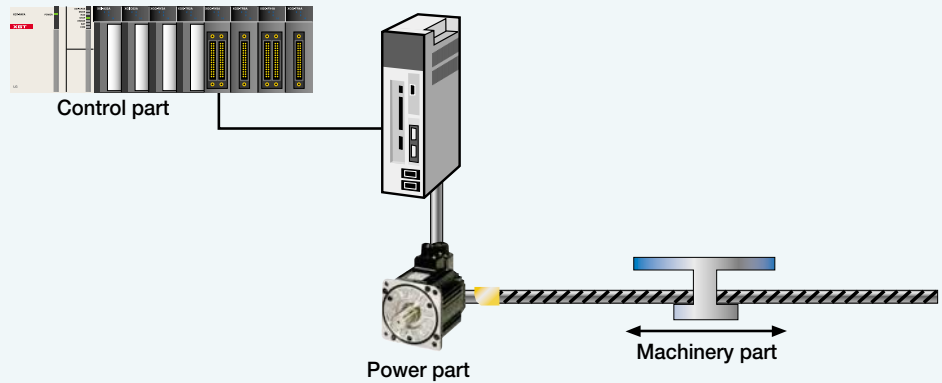


System design

- APM: Determine type and quantity considering the number of control axis and operation function.
- Driver: Select driver with identical output type of APM.
(In case output type of APM is line driver, driver should support a pulse train input type of line driver.)
- Motor: Select capacity considering operation characteristics of load.
- Mechanical: Design precise mechanical system to minimize error.

Connection to drivers

- The following picture is wiring pulse train signal between driver and APM for pulse train signal.
- Terminal besides pulse train signal is used additionally according to user-purpose, system characteristics.
- For wiring of optional terminal of Servo (Step) driver, refer to user's manual.

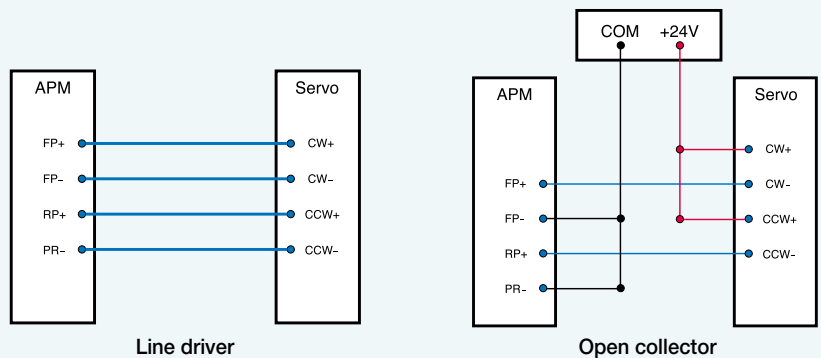

Special module / Positioning module (Example)

Parameter, data setting and transmission

- Set system characteristic, target location, operation speed, and operation type using APM software package.
- Transmit operation parameter and data to APM.

	Item	X-Axis
Basic Parameter	Unit	1 mm
	Pulse per Rotation	5000 pls
	Travel per Rotation	5000.0 um
	Unit Multiplier	0 x 1
	Pulse Output Mode	0 CW/CCW
	Bias Speed	0.01 mm/m
	Speed Limit	10000.00 mm/m
	ACC/DEC No.1	500 ms
	ACC/DEC No.2	1000 ms
	ACC/DEC No.3	1500 ms
ACC/DEC No.4	2000 ms	
SW Upper Limit	214748364.7 um	
SW Lower Limit	-214748364.8 um	
Backlash Comp	0.0 um	
Position Complete Time	1000 ms	
Ext. Command Selection	0 Start	

Setting parameter of system characteristic




APM software package

Step	Code	Control	Pattern	Method	Address [um]	Sub-Address [um]	M Code	A/D No.	Speed [mm/m]	Dwell [ms]	Circle Dir.
1	ABS	POS	END	SIN	0.0	0.0	0	No.1	0.00	0	CW
2	ABS	POS	END	SIN	0.0	0.0	0	No.1	0.00	0	CW
3	ABS	POS	END	SIN	0.0	0.0	0	No.1	0.00	0	CW
4	ABS	POS	END	SIN	0.0	0.0	0	No.1	0.00	0	CW

Target location, speed, operation type, operation data

Initial system inspection


- Perform a trial-run using APM Software Package, and check external wiring, operation data setting, and status of machinery part. It is recommended to do trial-run before programming.
- If a program is saved in CPU and operation mode is 'RUN', a unexpected fault can occur due to disagreement between operation condition of operation control program and operation result of APM Software Package.

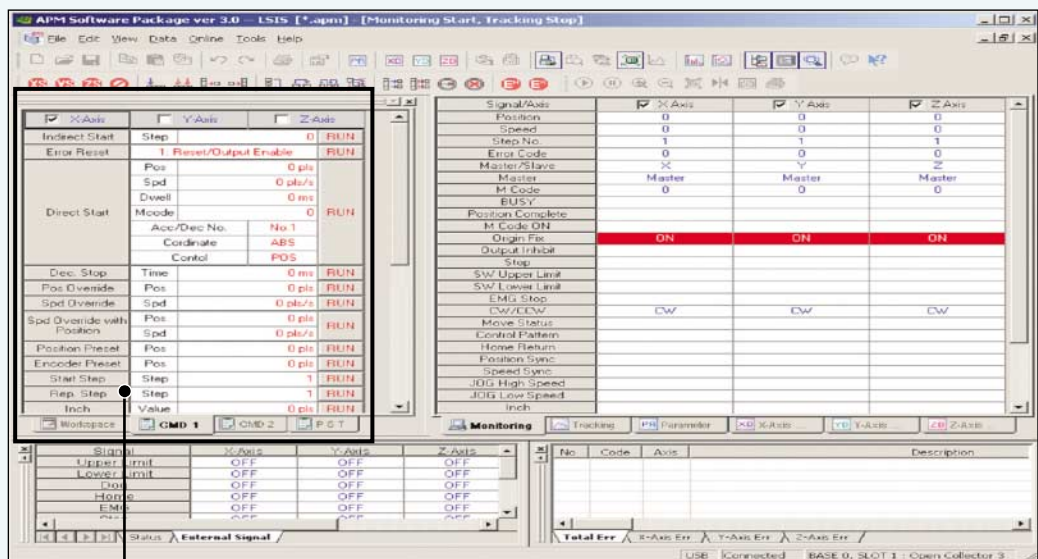

Operate APM without positioning programming


Programming

- Create a program using dedicated command for APM control.
ex) Origin point return-ORG, Independent operation-IST

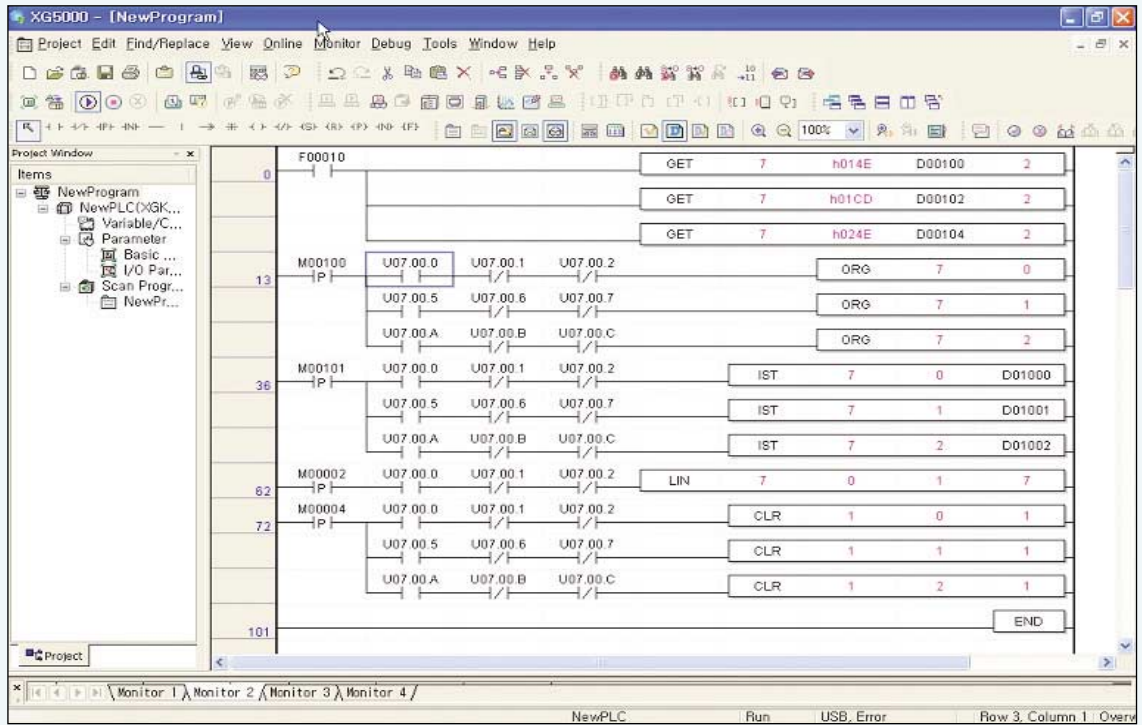

Program monitoring

- Monitor output condition following input condition and inspect operation status of APM and correct programming error.

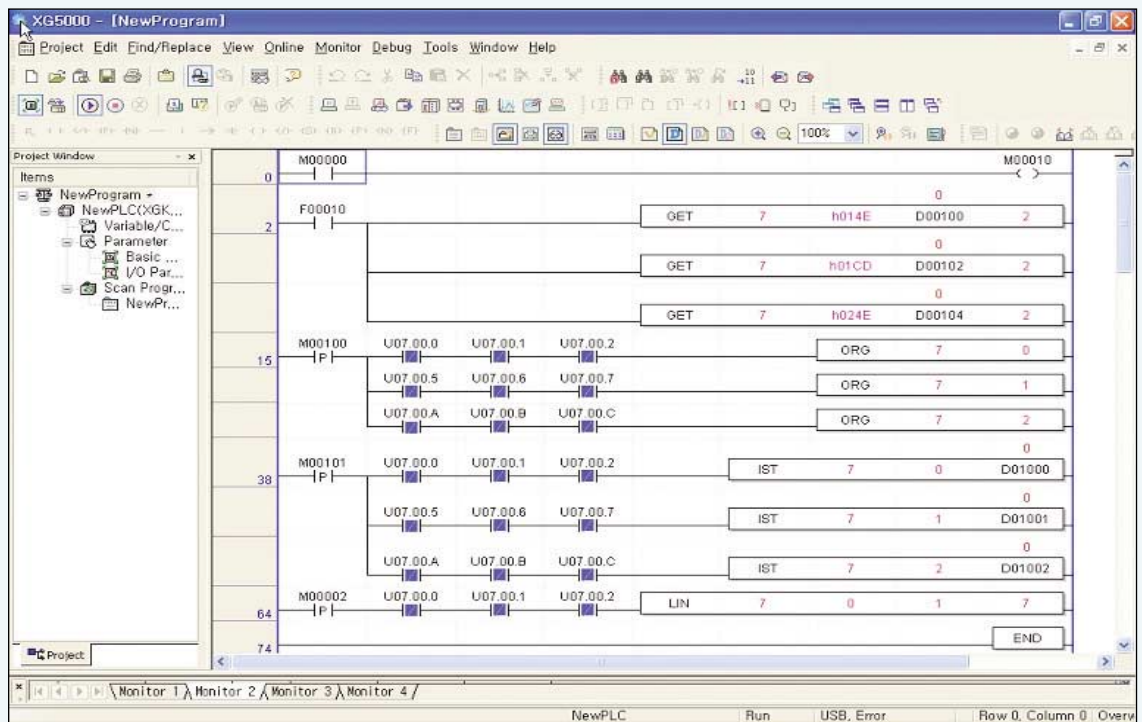

Special module / RTD input module


Features

- Supports various additional functions (average, alarm, filter)
- Special module parameter setting and monitoring with XG5000
- Supports digital conversion, temperature display and user scaling

Specifications


Item		XGF-RD4A	XGF-RD4S
No. of input channel		4 channels	4 channels
Input sensor type	Pt100	JIS C1604-1997	JIS C1604-1997
	JPt100	JIS C1604-1981, KS C1603-1991	JIS C1604-1981, KS C1603-1991
	PT1000	-	JIS C1604-1997
	NI100	-	DIN 43760-1987
Temperature input range	Pt100	-200.0 ~ 850.0°C	-200.0 ~ 850.0°C
	JPt100	-200.0 ~ 640.0°C	-200.0 ~ 640.0°C
	PT1000	-	-200.0 ~ 850.0°C
	NI100	-	-60.0 ~ 180.0°C
Digital output	Temperature display (unit: 0.1)	Pt100	-2,000 ~ 8,500
		JPt100	-2,000 ~ 6,400
		PT1000	-
		NI100	-
	Scaling display (Customize)	0 ~ 65535 -32768 ~ 32767	
Accuracy	Normal temp.(25°C)	±0.2%	±0.1%
	Full temp.(0~55°C)	±0.3%	±70ppm/°C
Conversion speed		40ms / channel	
Insulation	Channel to Channel	Non-insulation	Insulation
	Terminal to PLC Power	Photo-coupler	
Wiring method		3-wire	4-wire
Function	Average	Time average (320~64000ms)	
		Counting average(2~64000 count)	
		Moving average(2~100 samples)	
	Alarm	Process alarm	
Input changing rate alarm			
Filtering	Disconnection detection		
	Digital filter (160~64000ms)		
Terminal block		18-point terminal block	
Current consumption		5V: 450mA	5V: 720mA
Weight [g]		150g	

Characteristics of temperature conversion

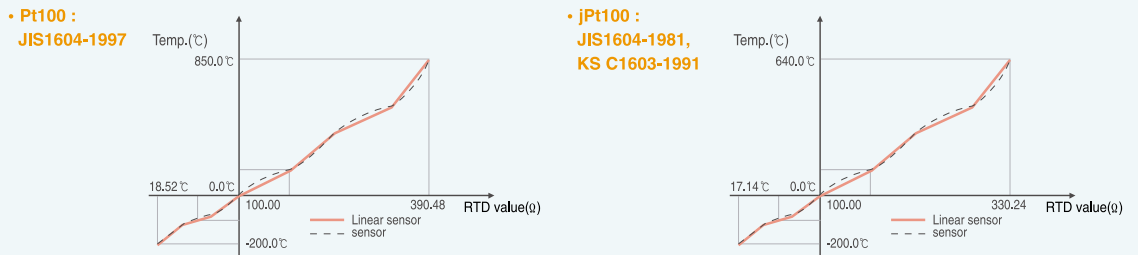


Wiring


• Connection with 2-wire type sensor



• Connection with 3-wire type sensor



• Connection with 4-wire type sensor



1) When sensor and compensating wire are shielded, shield-connection to FG terminal of the module is available.

2) The wiring of 4-wire type sensor is identical with the wiring of 3-wire type sensor. 3 wires is connected to the module. But the other wire is not connected with the module.

Special module / Thermocouple module

Features


- Insulation between channels
- $\pm 0.1\%$ (25°C) constant density
- Supports various input sensor (supporting C-type sensor)
- Various additional functions (average, filter, alarm, max/min value display)
- Special module parameter setting and monitoring with XG5000

Specifications

Item	XGF-TC4S	
Input channels	4 channels	
Input sensor type	K, J, E, T, B, R, S, N, C	JIS C1602-1995ITS-90
Input temperature range	K	-250 ~ 1350°C
	J	-200 ~ 1200°C
	E	-250 ~ 1000°C
	T	-250 ~ 400°C
	B	400 ~ 1800°C
	R	-50 ~ 1750°C
	S	-50 ~ 1750°C
	N	-270 ~ 1300°C
Digital output	Temperature display (unit: 0.1)	Display down to the first decimal place (0.1°C)
	Scaling (User range setting)	0 ~ 65535 -32768 ~ 32767
Accuracy	Normal temp. (25°C)	$\pm 0.1\%$
	Temperature coefficient (Operating temp. range)	Some section can permit 0.5% $\pm 100\text{ppm}^\circ\text{C}$
Conversion speed	40ms/ channel	
Insulation	Between channels	Insulation
	Between terminals and power	Insulation(Photo-Coupler)
Compensation	Automatic compensation by RJC sensing (PT100)	
	Compensation degree	$\pm 1.0\%$
Function	Average	Average time (320 ~ 6400ms)
		Average number (2 ~ 64000)
		Average move (2 ~ 100)
	Alarm	Process Alarm
		Change rate alarm
Filter	Digital filter (160 ~ 64000ms)	
Max./Min. values display	Max./Min. values display	
Terminal block	18-point terminal block	
Current consumption	5V : 610mA	
Weight (kg)	0.150	


Input wiring

Terminal block for compensating wire extension

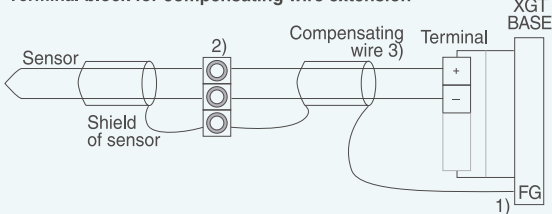

- 1) When sensor and compensating wire are shielded, shield connection to FG terminal is available.
- 2) To minimize an error, overall temperature of block terminal need to be equal.
- 3) Compensating sensor should be the same type of sensor which is used for measurement.

Characteristics of I/O conversion

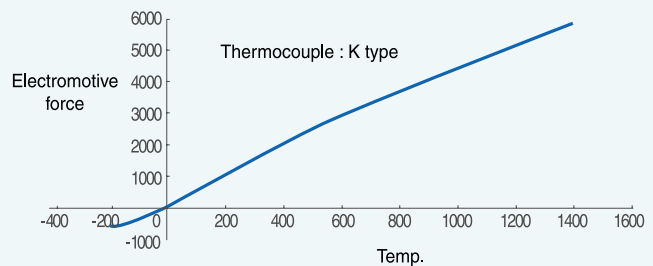

Special module / Temperature controller

Features

- Optimum temperature control
- Universal input: TC, RTD, Voltage, Current
- Isolated input
- Output: Current/Transistor
- Parameter setting via dedicated software: TG-CON
- Variety of control types
 - PID control
 - Cascade control
 - On/ Off control
- Disconnection detection
- Various input functions: Bias, Filter, Square root
- Auto-tuning




Specifications

Item	XGF-TC4UD				
No. of loop	4 loops				
Input	Thermo couple	K	-200 ~ 1300°C		
			0 ~ 500°C		
		J	-200 ~ 1200°C		
			0 ~ 500°C		
		E	-200 ~ 1000°C		
		T	-200 ~ 400°C		
		B	400 ~ 1800°C		
		R	0 ~ 1700°C		
		S	0 ~ 1700°C		
		N	-200 ~ 1300°C		
	C(W5Re/W26Re)	0 ~ 2300°C			
	RTD	PL II	0 ~ 1300°C		
		L	-200 ~ 900°C		
		U	-200 ~ 600°C		
	Voltage	DC mV	-200 ~ 850°C		
			-200 ~ 600°C		
		DC V	Pt100	-200 ~ 800°C	
			JPt100	0 ~ 10mV	
			DC mA	Pt1000	0 ~ 100mV
				0 ~ 1V	
1 ~ 5V					
0 ~ 5V					
Current	DC mA	0 ~ 10V			
		-5V ~ 5V			
Input channel	4 channels (Input type selection per channel)				

Specifications

Item	XGF-TC4UD				
Resolution	Resolution Refer to the user's manual (Resolution for each input type)				
Cold junction compensation	Compensation	Automatic compensation by RJC sensor			
	Precision	±0.2°C			
Digital output	Temperature display	0.1°C/1°C (Selection by software)			
	Linear display	0~1000			
	Scale display	Only for voltage/current input Range : -3,000~3,000 Setting range: 0~3000			
Control type	0.2sec/4 loops				
Conversion speed	PID, On/Off control				
Parameter	Set value (SV)	Selection per input type			
	Gain	0 : ON/OFF control, Real type			
	Integrated time	0 : No Differential control, Real type			
	Differential time	0 : No Integrated control, Real type			
Output	No. of output channel		8 channels (PWM or analog output)		
	PWM	Rated load voltage	DC 24V		
		Max. current point	0.1A points		
		On voltage drop	DC 0.3V or less		
		Off leakage current	0.1mA or less		
		Response time	ON ⇒ OFF	1ms or less	
			OFF ⇒ ON	1ms or less	
		Periodic	0.5~120.0sec (resolution: 0.5sec)		
	Time resolution	High value between 10ms or 0.5% of full scale			
	Analog output	Range	4~20mA		
		Resistance	600 Ω or less		
		Resolution	±1.0%, 25°C		
		Precision	8μA		
Item		Insulation	Insulation withstand voltage	Insulation resistance	
Insulation	Channel - Channel	Trans	500V AC, 50/60Hz 1min, Leakage 10mA or less	500V DC, 10M Ω or more	
	Input terminal - PLC	Photocoupler			
	Current output - Current output	Non insulation			
	External power - Output	Non insulation			
Warm-up	20min or more				
Terminal	18 points terminal				
Power	5V, DC 24V (external)				
Current consumption	DC 5V : 900mA (Internal)				
	DC 24V : 300mA (external)				

Example: Constant temperature

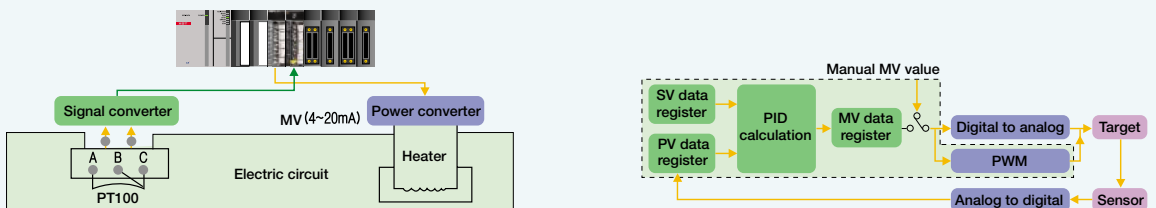

Special module / Event input module

Features

- SOE: Sequence Of Events Recorder
- I/O information collection to analyze the control system in Generation and Transformer
- Event collection in every 1ms
- Max. 300ea data available
- Data retain by built-in memory
- Max. installable module: 16ea
- Event monitoring of history through SOE Viewer




Specifications

Item		XGF-SOEA
Input point		32points
Memory size		1Mbit
Resolution		1 ms(±2ms Accuracy)
Max. system points		512points (16modules)
Rated input voltage		DC 24V
Rated input current		4mA
Range		DC 20.4 ~ 28.8V(Max. ripple 5%)
On voltage/current		DC 19V or more / 3mA or more
Off voltage/current		DC 11V or less/ 1.7mA or less
Input resistance		5.6 k Ω
Delay time	Off On	H/W delay(10us: normal)+Input filter time(User defined time: 0~100ms) +CPU scan time delay(50us)
	Off On	H/W delay(84us: normal)+Input filter time(User defined time: 0~100ms) +CPU scan time delay(50us)
Insulation resistance		10MΩ or more
Common		Photo coupler
Insulation method		LED
Operation display		40pin connector
Terminal		Fixed type (Setting in basic parameter): 64 points, Variable type (Dissolving in basic parameter): 16 points
No. of occupied I/O points (XGK)		32points/ COM
Current consumption (DC5V)		300mA
Wight		200

Special


SOE Viewer

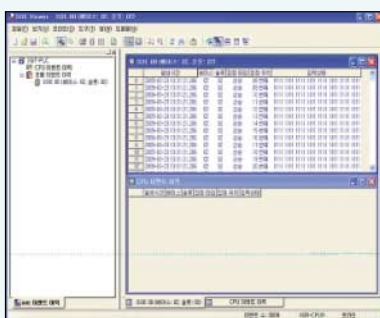

Monitoring window



Parameter setup

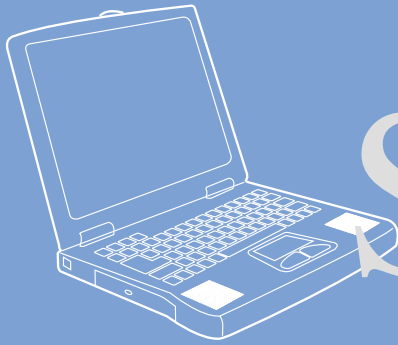


Software

Software innovation for integrated solution.

XG5000 is the optimum software which can cover various programming needs, debugging, and easy maintenance. Especially, XG-PD achieves customer satisfaction with useful maintenance tool by internet.





Programming software XG5000

- Program editing & Engineering software
- Windows-based easy operation
- Multi-PLC, Multi-programming support
- Various monitoring and diagnosis functions
- Windows 2000, XP (Limited use in Windows 98, ME)

Ladder monitor

Variable monitor

PLC	Type	Device	Address	Variable	Comment
1	PLC1	RELAY	000	RELAY_000	
2	PLC2	RELAY	000	RELAY_000	
3	PLC3	RELAY	000	RELAY_000	
4	PLC4	RELAY	000	RELAY_000	
5	PLC5	RELAY	000	RELAY_000	
6	PLC6	RELAY	000	RELAY_000	
7	PLC7	RELAY	000	RELAY_000	
8	PLC8	RELAY	000	RELAY_000	
9	PLC9	RELAY	000	RELAY_000	
10	PLC10	RELAY	000	RELAY_000	

Forced I/O

System monitor

Trend monitor

Special module monitor

Programming XG5000

Easy how to use
 Letter type, color, short key, tool bar

Convenient editing
 Undo, Redo, Excel editing


Structuralized program
 Scan, task (Initialization, normal cycle, external contact point, internal device)

Various monitoring
 Special module, trend, user-event, etc

Network set up, diagnosis XG-PD

Communication module parameter setting
 Basic, high-speed link parameter setting

System diagnosis and monitoring
 Ping/Self test
 Monitoring of sending/receiving frame
 Display of status and diagnosis of each module




Positioning APM S/W Package

Easy parameter setting

Data editing in Excel

Monitoring and trace



Features

- Program editing & Engineering software
- Windows-based easy operation
- Multi-PLC, Multi-program, Multi-task in one project
- Various monitoring and diagnosis functions
- Windows 2000, XP (Limited use in Windows 98, ME)



Programming tools

MPMP (Multi-PLC Multi-programming)


Different PLC systems can be edited, monitored, and managed simultaneously in one project.

Drag & Drop

It is available in project, variable/comment, ladder diagram editing and monitoring.

User-defined shortcut keys

User-defined shortcut keys increase editing convenience.

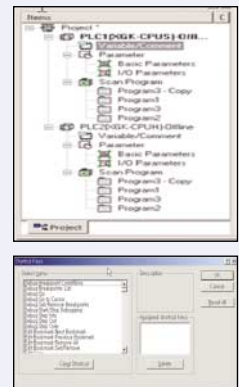


Monitoring


Item	Channel 0	Channel 1
Current Count Value	0	0
Latch Count Value	0	0
Range Count Value	0	0
Input Frequency	0 (* 1)	0 (* 1)
Revolution Unit Time	0	0
FLAG Monitor		FLAG Monitor

Item	Setting Value	Current Value
Channel	Channel 0	Channel 0
Counter Mode	Linear	Linear
Pulse Input Mode	2-Phs x1	2-Phs x1
Preset	0	0
Ring Counter Min	0	0
Ring Counter Max	0	0
Comp Output Mode	(Magnitude)=	(Magnitude)=
Comp Output Min	0	0
Comp Output Max	0	0
Comp Output1 Min	0	0
Comp Output1 Max	0	0
Output Status Setting	Output Disable	Output Disable
Auxiliary Mode	No Auxiliary	No Auxiliary
Range Value (ms)	0	0
Pulse/Rev Value	0	0
Frequency Mode	1 Hz	1 Hz

Special module monitoring
Monitoring and test-run of various special modules are available.

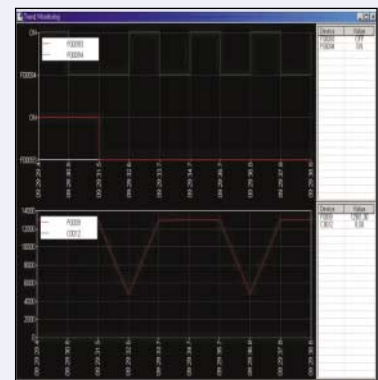


Trend monitoring
The changing value of specific device can be monitored and saved as a file.

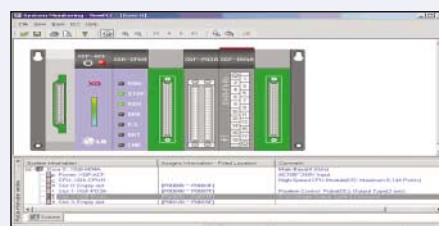

System monitoring

Time	Variable	Comment
00:00:00
00:00:01
00:00:02
00:00:03
00:00:04
00:00:05
00:00:06
00:00:07
00:00:08
00:00:09
00:00:10
00:00:11
00:00:12
00:00:13
00:00:14
00:00:15
00:00:16
00:00:17
00:00:18
00:00:19
00:00:20
00:00:21
00:00:22
00:00:23
00:00:24
00:00:25
00:00:26
00:00:27
00:00:28
00:00:29
00:00:30

Device monitoring




Variable monitoring

System requirement

Item	System requirement
O/S	Windows 2000, XP (Limited use in Windows 98, ME)
CPU	IBM compatible PC with Min. 200MHz Pentium processor
Memory	Min. 128M
HDD	100 MB (Free memory space)
Serial port	Communication port for program transmission (RS-232C, USB)
Printer	Compatible with Windows 98 or later
Mouse	Compatible with Windows 98 or later

Variable and programming editing


- Data input like EXCEL
- Cell-unit edit
- Auto Fill function
- Compatible with Microsoft Excel
- Redo and Undo (Unlimited)
- Segment screen edit

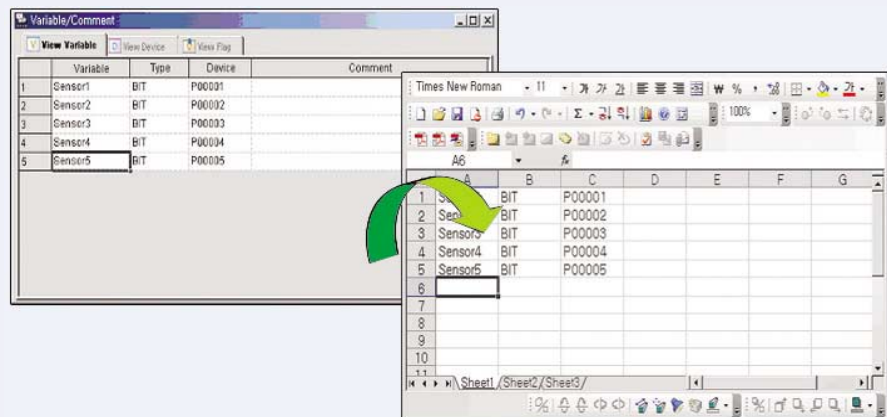

Improved diagnosis and maintenance




Module exchange wizard
It supports safe module exchange during 'RUN' mode.

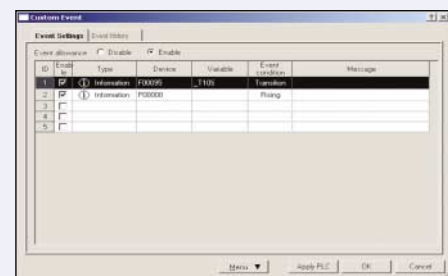

User-defined event
By registering user-defined event, users can read the record of specified event and use it for PLC operation and debugging.




Forced I/O
The status of external output device can be checked without program. And when input device breaks down, forced input function specifies ON/OFF and can operate the system without interruption of equipment.

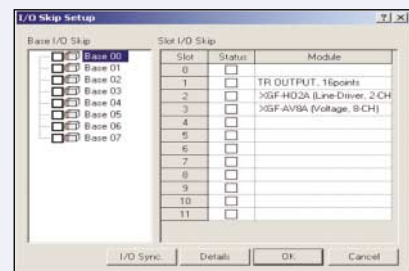

I/O skip, Error Mask
I/O inspection and renewal can be set for specific module and continuous operation is available when an error is occurred.


Program editing

- Start XG5000
- Select [New Project]
- Write project name and select CPU type

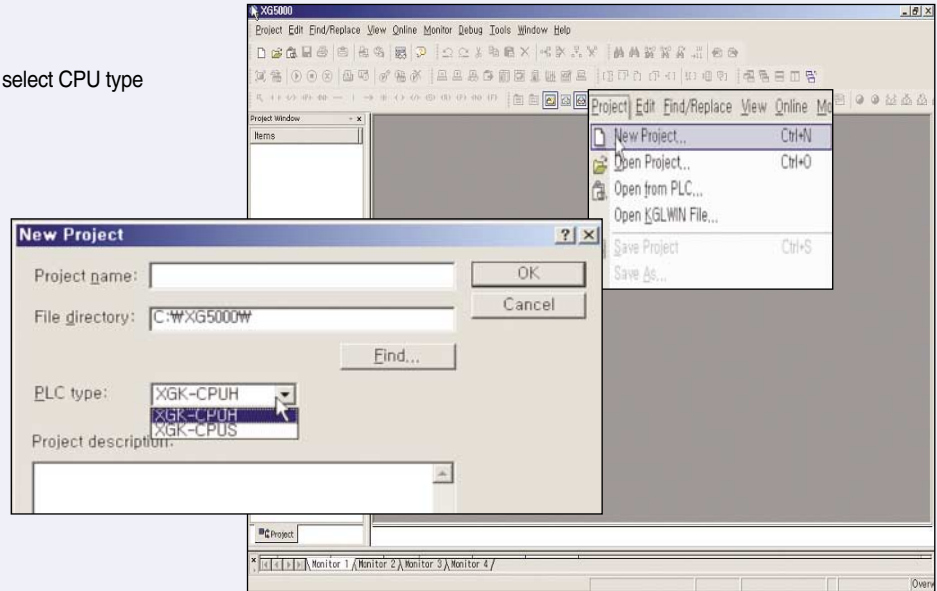

Configure ladder lines as below with ladder input tool bar


- Select input point and command with ladder tool bar.

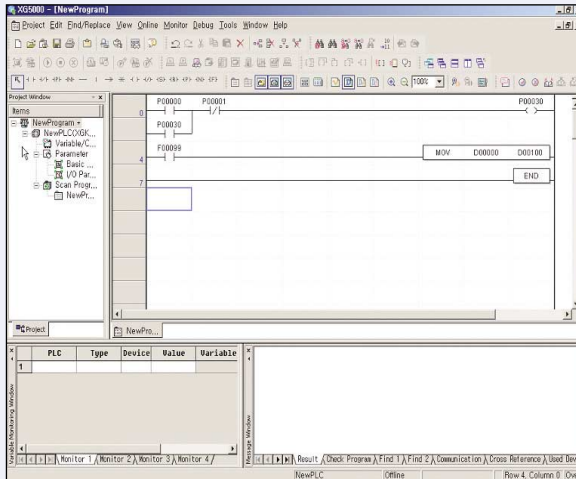

Icon	Description	Short key
	Arrow mode	ESC
	Normally open contact	F3
	Normally closed contact	F4
	Positive transition-sensing contact (On for 1 scan when Off-->On)	Shift+F1
	Negative transition-sensing contact (On for 1 scan when On-->Off)	Shift+F2
	Horizontal line	F5
	Vertical line	F6
	Fill horizontal line.	Shift+F8
	Coil	F9
	NOT instruction contact	Shift+F9
	Negated coil	F11
	SET coil	Shift+F3
	RESET coil	Shift+F4
	Positive transition-sensing coil (On for 1 scan when Off-->On)	Shift+F5
	Negative transition-sensing coil (On for 1 scan when On-->Off)	Shift+F6
	Function	F10

Note) Addition of 'EDGE' detection instructions

Develop user-friendly programming through adding D, D NOT instructions (Rising EDGE, dropping EDGE) to contact and output coil.




Program download

Connection setting

- Check a setting for connection between XGT and XG5000
- XGT supports USB and RS-232C

Set up communication port and download speed

* using "USB TO RS-232C" converter, 115,200bps connection may be unavailable depending on characteristics of converter. In this case, change the communication speed to 38,400bps.

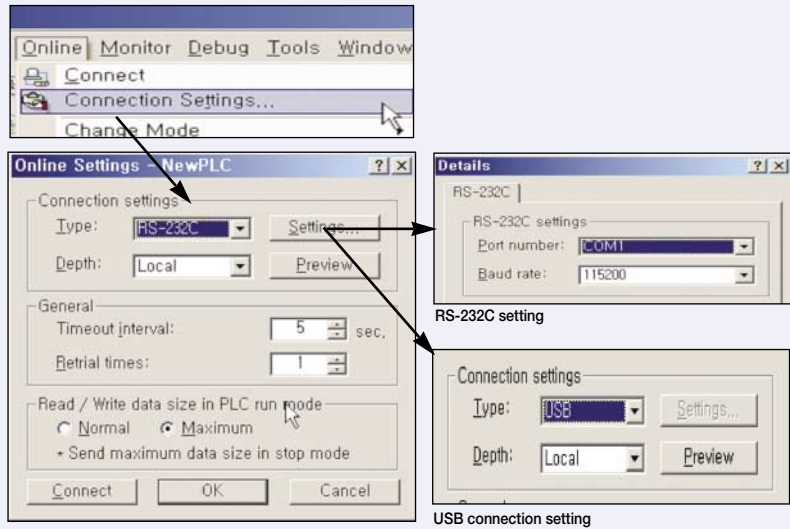


RS-232C setting

USB connection setting

Connection


Connect to PLC and download the program as below.

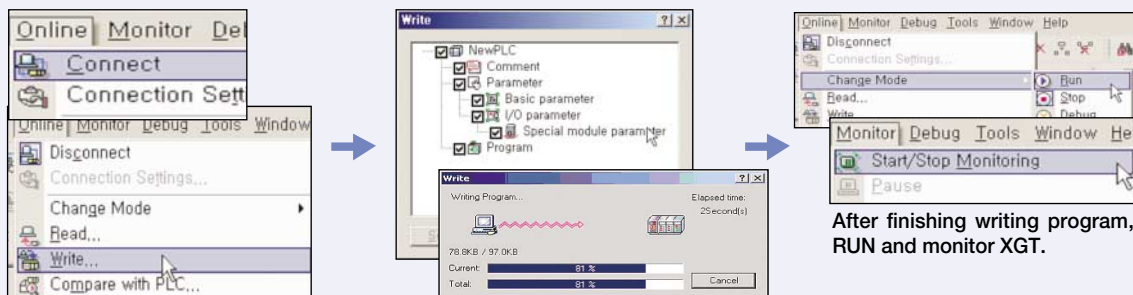

After finishing writing program, RUN and monitor XGT.


Short icon

* XGT doesn't support collective-writing monitoring for system safety.

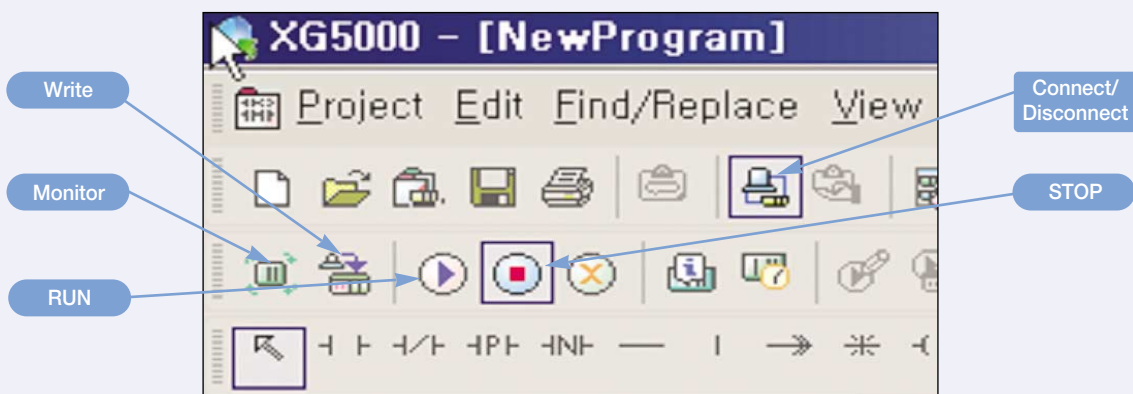


Online Editing

Select [Start Online Editing] in Online menu.

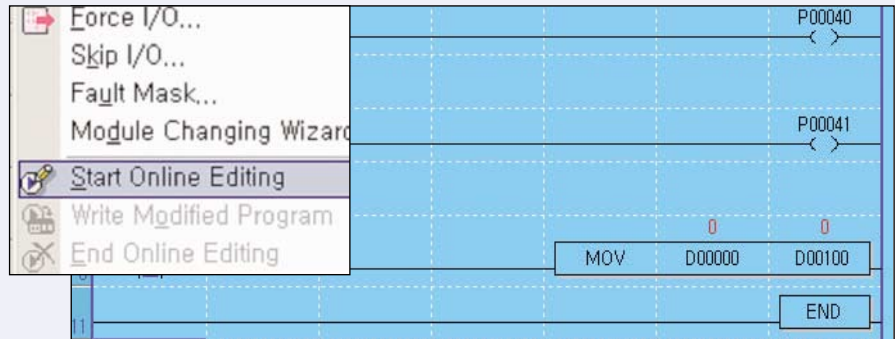


When starting Online Editing, the screen color becomes blue.

Modify the program.

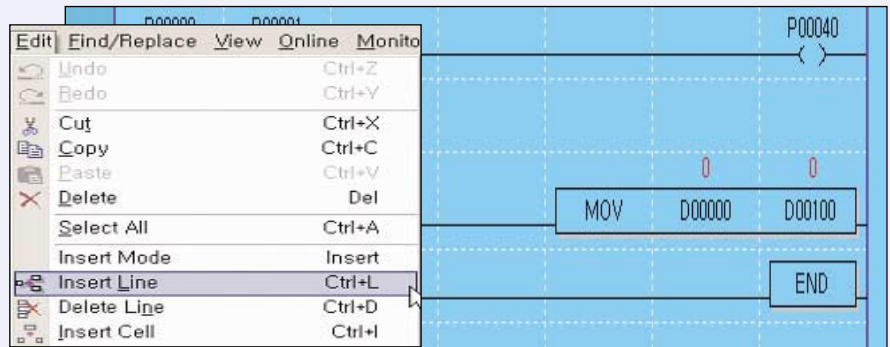


Edit menu

After finishing modifying the program, select [Write Modified Program] and [End Online Editing].

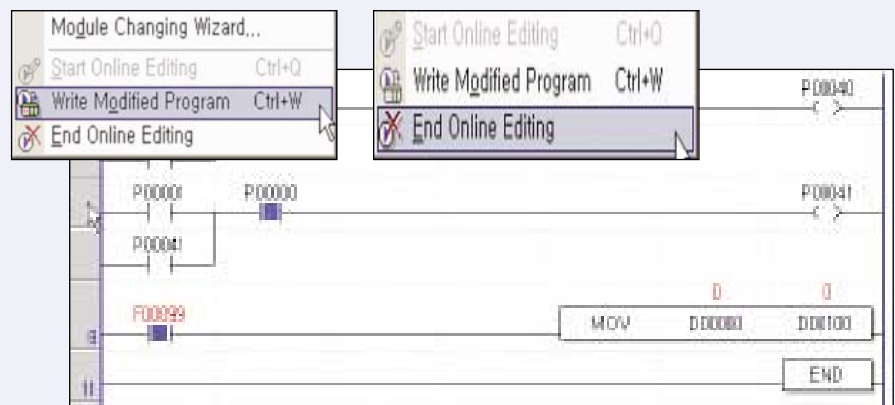


After finishing 'Online Editing'


Open a project written in KGL-WIN

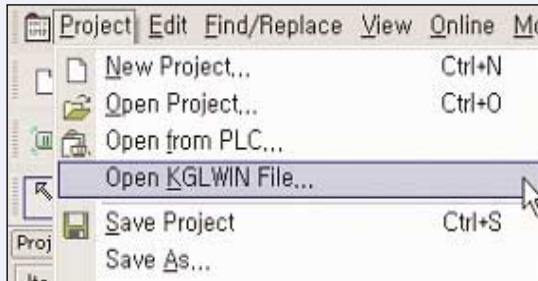


Select [Open KGLWIN file] in project.

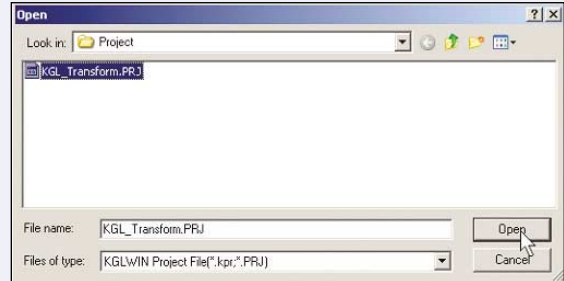

Select the file.

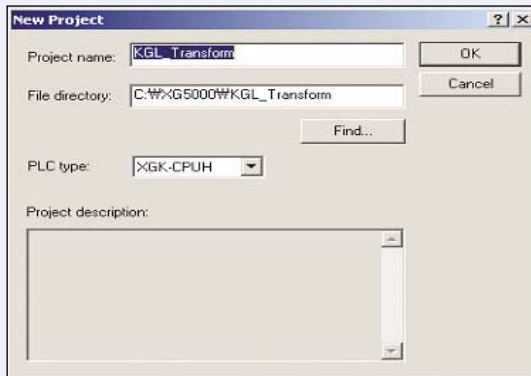


Select the type of XGT CPU.

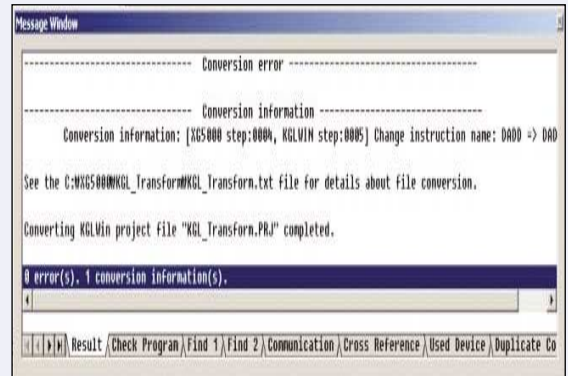

Check converted information in the message window.

Note) Dedicated instructions and special parameters for MASTER-K cannot be converted.
Mostly General instructions and descriptions are converted.
Information impossible to be converted is displayed as ERR.




• Content of main special flag (F) change

MASTER-K	XGT	Specifications
F10	F99	ON regularly
F11	F9A	OFF regularly
F12	F9B	ON during first one scan
F13	F9C	OFF during first one scan


For more detailed information, refer to user's manual.

Data type

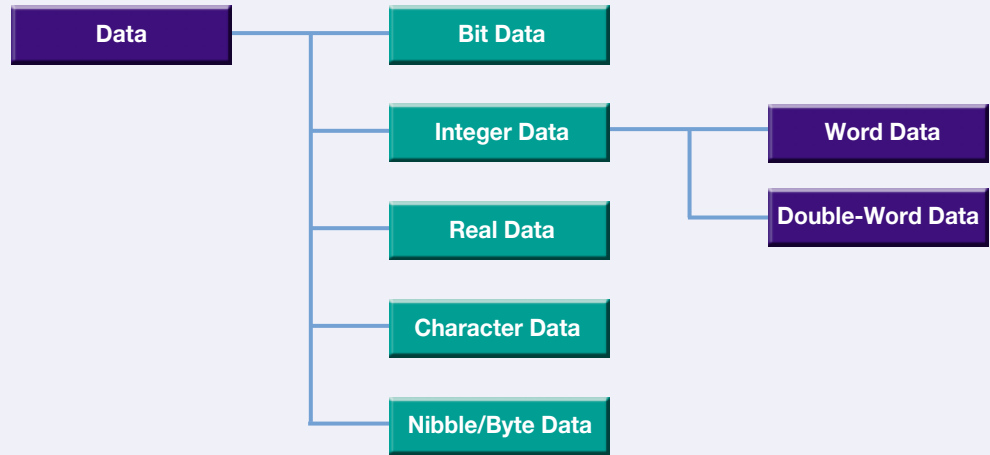


- Nibble: 4-bit unit data
- Byte: 8-bit unit data
- Real Data: 32-bit/64-bit floating point data


Real Number

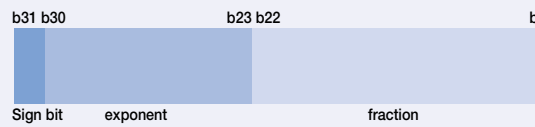

Long Real Number

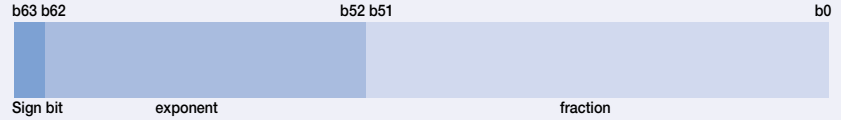

- Character Data: Saving numbers, alphabets, symbols as a type of ASCII code

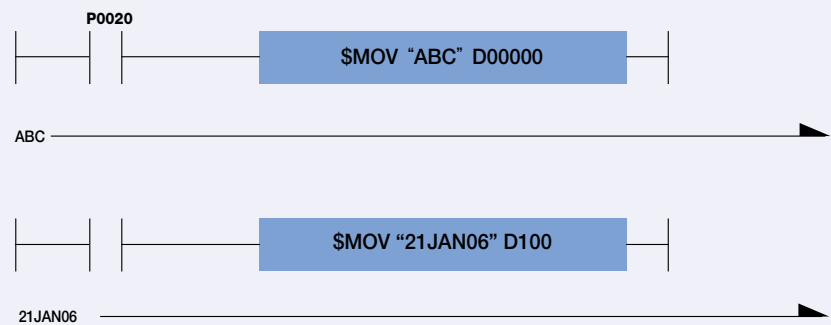

D100	0x31	0x32
D101	0x41	0x4A
D102	0x30	0x4E
D103	0x00	0x36
D104	0x00	0x36


Device Type

Device	Size	Bit Contact	Word Data	Name
P	32768 points	P00000 ~ P2047F	P0000 ~ P2047	I/O Relay
M	32768 points	M00000 ~ M2047F	M0000 ~ M2047	Assistant Relay
L	180224 points	L00000 ~ L11263F	L0000 ~ L11263	Link Relay
N *1)	21K words	N/A	N00000 ~ N21503	Comm. data register
K	32768 points	K00000 ~ K2047F	K0000 ~ K2047	Keep Relay
F	32768 points	F00000 ~ F2047F	F0000 ~ F2047	Special Relay
T *2)	2048 points	T0000 ~ T2047	T0000 ~ T2047	Timer
C *3)	2048 points	C0000 ~ C2047	C0000 ~ C2047	Counter
U	3072 words	U00.00.0 ~ U7F.31.F	U00.00 ~ U7F.31	Special Module Counter
Z	128 words	N/A	Z0 ~ Z127	Index Register
S	128 groups	S00.00 ~ S127.99	N/A	Step Control Relay
D	32K words	D00000.0 ~ D32767.F	D00000 ~ D32767	Data Register
R (Internal RAM) *4)	32K words	R00000.0 ~ R32767.F	R00000 ~ R32767	File Register
ZR (Internal RAM) *5)	32K words	N/A	ZR00000 ~ ZR65535	File Register
R (Expanded)	1M words	N/A	Available as much as extension size	File Register
ZR (Expanded)	1M words	N/A	Available as much as extension size	File Register

- Note 1. When communication module is not used, it can be used as internal data area.
 2. Word data in timer shows a current value of relevant bit contact.
 3. Word data in counter shows a current value of relevant bit contact.
 4. Even when using more than 32K words internal RAM, bit contact available to display is R00000.0~R32767.F Also word data enable to be displayed in the range of R00000.0~R32767.F
 5. When internal RAM is more than 32K words, bit contact can be in the range of ZR00000.0~ZR32767.F and word data can be displayed as much as the size of internal RAM

Special module register U


Register for reading data from special module mounted in slot



- Assigning 32 words per slot in U area
- Bit type display available
Ex) U93.12.x (x: Bit location, Hexadecimal display)
- Available to read/write internal memory value of special module without using PUT (P), GET (P), PUTS (P), GETS (P)
- Basic display in U area
Ex) Uxy.z
x: Base number (0~7)
y: Slot number (0~F)
z: Word number of special module internal memory

File register R, ZR


Register that a recorded value is not deleted when power failure is occurred. File register is used for data backup or data storage.



- R: Block unit access
- ZR: Entire file register access
- Internal RAM (Temporary preservation): 32K words
- FLASH (Permanent preservation): 1M words

Index register


Index register sets up devices using index function.
 The sum of index register value and directly specified device number is real device number.

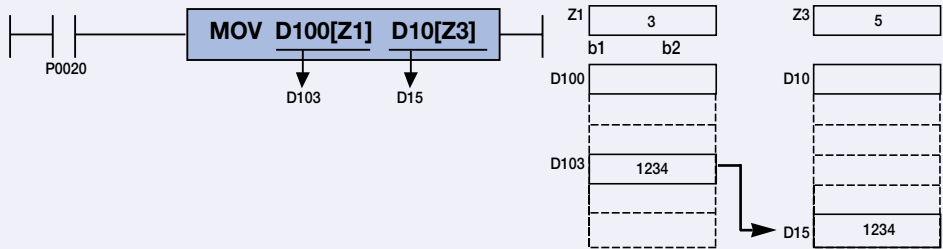

Available Device

- Bit Device: P, M, L, K, F, T, C
 - Word Device: U, D, R, ZR, N, present value of T and present value of C
- Ex) MOV T1[Z1] D10 : If Z1 is 5, present value of T(1+5)=T6 is transmitted to D10.
 Ex) LOAD D10[Z1].5 : If Z1 is 5, LOAD(10+5).5 => LOAD D15.5 is set.

Bit specifying method of word device

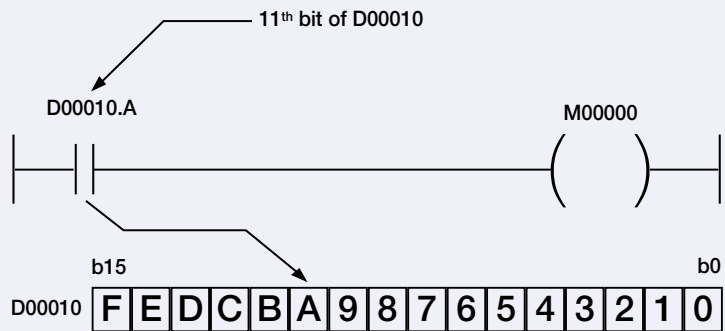

By assigning bit number to word device, bit data is available to use.

Word device number . **Bit number**

In this case, word device number should be addressed as decimal and bit number should be addressed as hexadecimal.

Relevant Device: U, D, R

Instructions

Classification	Designations	Symbol	Description	No. of step
16 Bits transfer	MOV	MOV S D	(S) → (D)	2
	MOVP	MOVP S D	(S) → (D)	3
32 Bits	DMOV	DMOV S D	(S+1 _{ΔS}) → (D+1 _{ΔD})	2
	DMOVP	DMOVP S D	(S+3 _{ΔS} , S+2 _{ΔS} , S+1 _{ΔS})	

① **Classification: Classifies instructions into applications.**

② **Designations: Displays instruction names to be used in program.**

- Display rules: Instructions shall be basically displayed in word unit. According to data size, operation characteristics, real number data process, text process, the rules are as follows;
- Based on Data Size & Type
 - D: Double Word related instruction.
 - R: Real Number related instruction.
 - L: Long Real Number related instruction.
 - However, LMOV is 64 Bits transfer instruction.
 - \$: String related instruction.
 - G: Group calculation.
 - 4: Nibble related instruction, used only at the back of instruction.
 - 8: Byte related instruction, used only at the back of instruction.
 - 3: Instruction that process 3 operands, used only at the back of instruction.
- Based on Operation Characteristics
 - P: Instruction that is executed for 1 scan when input signal is changed OFF = > ON

③ **Symbol: Displays symbols used in program, showing the number of used operands and the type of Source or Destination. Operand display rules are as follows;**

- S: Source, with data value not changed after calculated.
- D: Destination, with data value changeable after calculated.
- N, n: The number to process.
- St, En: Start and End, used only in BSFT & WSFT.
- Sb: Source in case Bit position is specified, mostly used in Nibble/Byte instruction.
- Db: Destination in case Bit position is specified.
- Z: Control word, which means previously specified format as based on each instruction.

④ **Description: Describes general functions of instruction.**

⑤ **No. of step: The number of basic steps of instruction, which means the number of steps in case indirect specification, index formula and direct variable input were not used.**

Features

- Convenient user-program, network initial basic setting
- Providing extended monitoring, control function of network system and communication module
- Fast interface with CPU by efficient network management
- Unification of instruction system
- Simple and easy connection using dedicated driver (XGT) and other driver (MODBUS)
- Various built-in Diagnosis functions (Link, Auto-scan, Frame, etc.)




Item		RAPIDnet	FEnet	FDEnet	IFOS FEnet	Cnet	Rnet	DeviceNet	Profibus-DP
Service	High speed link	○	○	○	○	-	○	○	○
	XGT server protocol	-	○	-	○	○	-	-	-
	MODBUS server protocol	-	○	-	○	○	-	-	-
	P2P	-	○	○	○	○	-	-	-
	XG5000 Service	○	○	○	○	○	○	-	-
High speed link	Max. station	64	64	64	64	-	64	64	126/123
	No. of block	128	128	128	128	-	64	64	126
	Send block	64	32	32	32	-	32	64	126
	Receive block	128-Send block				-	32	64	126
	Data per block	200 words				-	60 words	25 6bytes	244bytes
P2P	No. of block	-	64	64	64	64	-	-	-
	Data per block	-	1 st , 2 nd stage connection			256 words	-	-	-
	Service	-	User defined, XGT client, Modbus client				-	-	-
System diagnosis		Connection status, network status							
Media		10/100Base-T/FX			100Base-FX	900~115200bps	1Mbps	125/250/500Kbps	9.6K~12Mbps
Topology		Ring, Bus	Star	Ring, Bus	Star	Bus	Bus	Bus, Star	Bus
Configuration Tool		XG-PD						XG-PD/SyCon	

Various network diagnosis and monitoring

- Auto Scan: Searching and displaying each node connected to network
- Link Monitor: Monitoring status of high-speed link communication of each station
- Frame Monitor: Collecting and displaying sending/receiving frame in real time




Item	RAPIEnet	FEnet	FDEnet	IFOS FEnet	Cnet	EtherNet/IP	Fnet	Rnet	DeviceNet	Profibus-DP
Module information	●	●	●	●	●	●	●	●	●	●
Media status	●	—	—	—	—	●	—	—	—	—
Auto scan	●	●	●	●	●	●	●	●	●	●
Ping test	—	●	●	●	●	—	—	—	—	—
Link monitoring	●	●	●	●	●	●	●	●	●	●
Frame monitoring	—	—	—	—	●	—	—	—	—	—

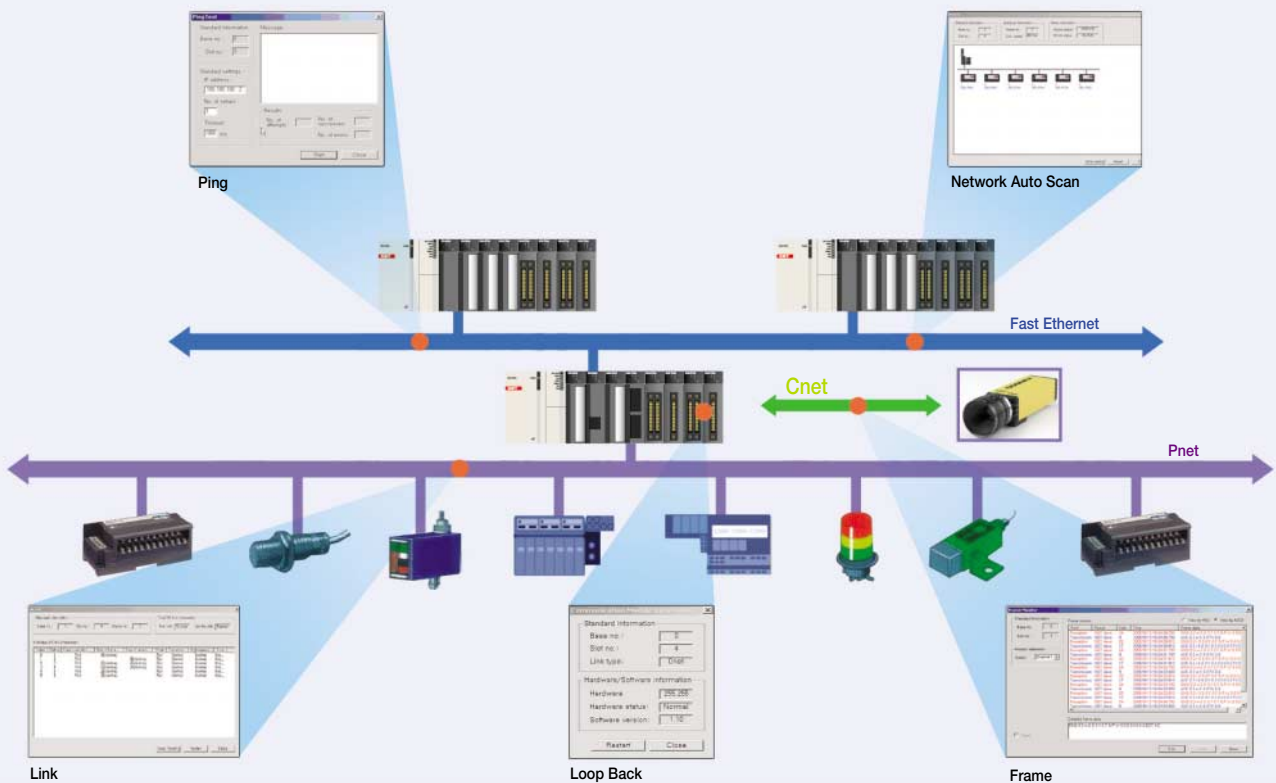

Software

Features

- Windows-based easy operation
- Supporting all types of LS APM module
- Improved parameter editing (Copy, Paste, Initialization, etc.)
- Various monitoring (Operation type of each axis, etc.)
- Profile trace and operation monitoring
- Profile graph and simulation of circular interpolation
- Available to edit operation parameter in EXCEL

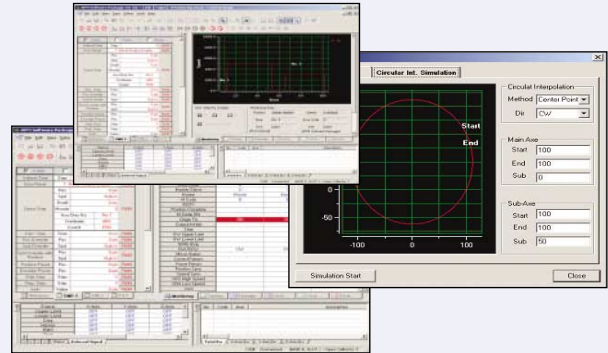

Step	Cond	Control	Pattern	Method	Address [pulse]	Sub-Address [pulse]	M Code	A/D No.	Speed [pulse/s]	Dwell [ms]	Cr/Int Dir
1	ABS	POS	END	SIN	10000	0	0	No.1	1000	0	CW
2	ABS	POS	END	SIN	0	0	0	No.1	0	0	CW
3	ABS	POS	END	SIN	0	0	0	No.1	0	0	CW
4	ABS	POS	END	SIN	0	0	0	No.1	0	0	CW
5	ABS	POS	KEEP	SIN	100000	0	0	No.1	0	0	CW
6	ABS	POS	END	SIN	0	0	0	No.1	10000	0	CW
7	ABS	POS	END	SIN	0	0	0	No.1	10000	0	CW
8	ABS	POS	END	SIN	0	0	0	No.1	0	0	CW
9	ABS	POS	END	SIN	0	0	0	No.1	0	0	CW
10	ABS	POS	CONT	SIN	100000	0	0	No.1	0	0	CW
11	ABS	POS	END	SIN	1000	0	0	No.1	10000	0	CW
12	ABS	POS	END	SIN	0	0	0	No.1	500	0	CW


Operation Data

Define operation method, target location, operation speed of each axis.



Profile simulation (Off-line)

Monitoring operation speed of each axis with graph type and saving result as image file.

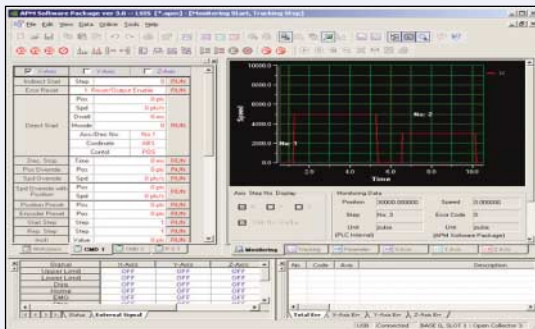


Profile Trace (On-line)

Monitoring operation speed of each axis with graph type and saving result as image file.

Axis	0-Point	1-Point	2-Point	3-Point
0-Point	0.00000	0.00000	0.00000	0.00000
1-Point	0.00000	0.00000	0.00000	0.00000
2-Point	0.00000	0.00000	0.00000	0.00000
3-Point	0.00000	0.00000	0.00000	0.00000
4-Point	0.00000	0.00000	0.00000	0.00000
5-Point	0.00000	0.00000	0.00000	0.00000
6-Point	0.00000	0.00000	0.00000	0.00000
7-Point	0.00000	0.00000	0.00000	0.00000
8-Point	0.00000	0.00000	0.00000	0.00000
9-Point	0.00000	0.00000	0.00000	0.00000
10-Point	0.00000	0.00000	0.00000	0.00000
11-Point	0.00000	0.00000	0.00000	0.00000
12-Point	0.00000	0.00000	0.00000	0.00000
13-Point	0.00000	0.00000	0.00000	0.00000
14-Point	0.00000	0.00000	0.00000	0.00000
15-Point	0.00000	0.00000	0.00000	0.00000
16-Point	0.00000	0.00000	0.00000	0.00000
17-Point	0.00000	0.00000	0.00000	0.00000
18-Point	0.00000	0.00000	0.00000	0.00000
19-Point	0.00000	0.00000	0.00000	0.00000
20-Point	0.00000	0.00000	0.00000	0.00000
21-Point	0.00000	0.00000	0.00000	0.00000
22-Point	0.00000	0.00000	0.00000	0.00000
23-Point	0.00000	0.00000	0.00000	0.00000
24-Point	0.00000	0.00000	0.00000	0.00000
25-Point	0.00000	0.00000	0.00000	0.00000
26-Point	0.00000	0.00000	0.00000	0.00000
27-Point	0.00000	0.00000	0.00000	0.00000
28-Point	0.00000	0.00000	0.00000	0.00000
29-Point	0.00000	0.00000	0.00000	0.00000
30-Point	0.00000	0.00000	0.00000	0.00000
31-Point	0.00000	0.00000	0.00000	0.00000
32-Point	0.00000	0.00000	0.00000	0.00000
33-Point	0.00000	0.00000	0.00000	0.00000
34-Point	0.00000	0.00000	0.00000	0.00000
35-Point	0.00000	0.00000	0.00000	0.00000
36-Point	0.00000	0.00000	0.00000	0.00000
37-Point	0.00000	0.00000	0.00000	0.00000
38-Point	0.00000	0.00000	0.00000	0.00000
39-Point	0.00000	0.00000	0.00000	0.00000
40-Point	0.00000	0.00000	0.00000	0.00000
41-Point	0.00000	0.00000	0.00000	0.00000
42-Point	0.00000	0.00000	0.00000	0.00000
43-Point	0.00000	0.00000	0.00000	0.00000
44-Point	0.00000	0.00000	0.00000	0.00000
45-Point	0.00000	0.00000	0.00000	0.00000
46-Point	0.00000	0.00000	0.00000	0.00000
47-Point	0.00000	0.00000	0.00000	0.00000
48-Point	0.00000	0.00000	0.00000	0.00000
49-Point	0.00000	0.00000	0.00000	0.00000
50-Point	0.00000	0.00000	0.00000	0.00000
51-Point	0.00000	0.00000	0.00000	0.00000
52-Point	0.00000	0.00000	0.00000	0.00000
53-Point	0.00000	0.00000	0.00000	0.00000
54-Point	0.00000	0.00000	0.00000	0.00000
55-Point	0.00000	0.00000	0.00000	0.00000
56-Point	0.00000	0.00000	0.00000	0.00000
57-Point	0.00000	0.00000	0.00000	0.00000
58-Point	0.00000	0.00000	0.00000	0.00000
59-Point	0.00000	0.00000	0.00000	0.00000
60-Point	0.00000	0.00000	0.00000	0.00000
61-Point	0.00000	0.00000	0.00000	0.00000
62-Point	0.00000	0.00000	0.00000	0.00000
63-Point	0.00000	0.00000	0.00000	0.00000
64-Point	0.00000	0.00000	0.00000	0.00000
65-Point	0.00000	0.00000	0.00000	0.00000
66-Point	0.00000	0.00000	0.00000	0.00000
67-Point	0.00000	0.00000	0.00000	0.00000
68-Point	0.00000	0.00000	0.00000	0.00000
69-Point	0.00000	0.00000	0.00000	0.00000
70-Point	0.00000	0.00000	0.00000	0.00000
71-Point	0.00000	0.00000	0.00000	0.00000
72-Point	0.00000	0.00000	0.00000	0.00000
73-Point	0.00000	0.00000	0.00000	0.00000
74-Point	0.00000	0.00000	0.00000	0.00000
75-Point	0.00000	0.00000	0.00000	0.00000
76-Point	0.00000	0.00000	0.00000	0.00000
77-Point	0.00000	0.00000	0.00000	0.00000
78-Point	0.00000	0.00000	0.00000	0.00000
79-Point	0.00000	0.00000	0.00000	0.00000
80-Point	0.00000	0.00000	0.00000	0.00000
81-Point	0.00000	0.00000	0.00000	0.00000
82-Point	0.00000	0.00000	0.00000	0.00000
83-Point	0.00000	0.00000	0.00000	0.00000
84-Point	0.00000	0.00000	0.00000	0.00000
85-Point	0.00000	0.00000	0.00000	0.00000
86-Point	0.00000	0.00000	0.00000	0.00000
87-Point	0.00000	0.00000	0.00000	0.00000
88-Point	0.00000	0.00000	0.00000	0.00000
89-Point	0.00000	0.00000	0.00000	0.00000
90-Point	0.00000	0.00000	0.00000	0.00000
91-Point	0.00000	0.00000	0.00000	0.00000
92-Point	0.00000	0.00000	0.00000	0.00000
93-Point	0.00000	0.00000	0.00000	0.00000
94-Point	0.00000	0.00000	0.00000	0.00000
95-Point	0.00000	0.00000	0.00000	0.00000
96-Point	0.00000	0.00000	0.00000	0.00000
97-Point	0.00000	0.00000	0.00000	0.00000
98-Point	0.00000	0.00000	0.00000	0.00000
99-Point	0.00000	0.00000	0.00000	0.00000
100-Point	0.00000	0.00000	0.00000	0.00000


Operation parameter

Setting basic operation characteristics and limit value.

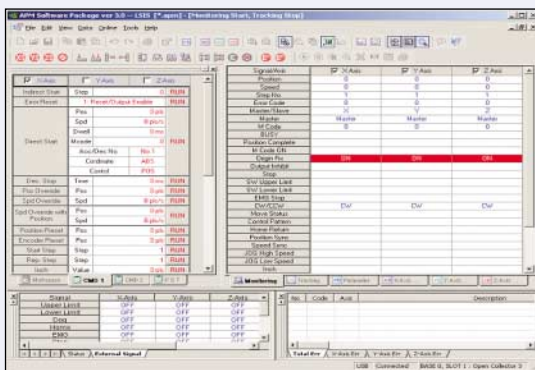

Monitoring (On-line)

Checking basic operation characteristics about each axis and monitoring operation condition.

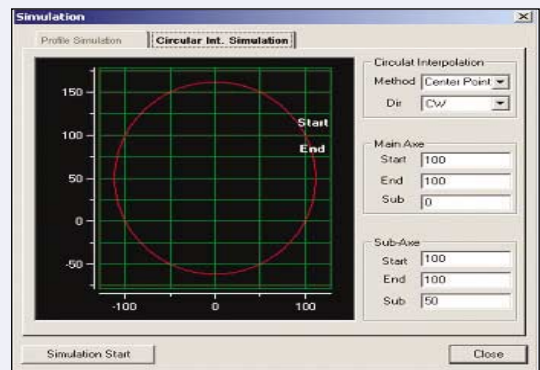

Circular interpolation simulation (Off-line)

Product list

CPU / PWR / Base / I/O			
CPU	XGI-CPUU	6,144pt (IEC type), Program memory: 1Mbyte	
	XGI-CPUH	6,144pt (IEC type), Program memory:1.5Mbyte	
	XGK-CPUU	6,144pt, Program memory : 128Ksteps	
	XGK-CPUH	6,144pt, Program memory : 64Ksteps	
	XGK-CPUA	3,072pt, Program memory : 32Ksteps	
	XGK-CPUS	3,072pt, Program memory : 32Ksteps	
	XGK-CPUE	1,536pt, Program memory : 16Ksteps	
Power	XGP-ACF1	Free Voltage/DC5V 3A, DC24V 0.6A	
	XGP-ACF2	Free Voltage/DC5V 6A	
	XGP-AC23	220V/DC5V 8.5A	
	XGP-DC42	DC24V/DC5V 6A	
Main base	XGB-M04A	4 Slot	
	XGB-M06A	6 Slot	
	XGB-M08A	8 Slot	
	XGB-M12A	12 Slot	
Expansion base	XGB-E04A	4 Slot	
	XGB-E06A	6 Slot	
	XGB-E08A	8 Slot	
Input	XGI-A12A	AC110V, 16pt	
	XGI-A21A	AC220V, 8pt	
	XGI-D21A	DC24V, 8pt	
	XGI-D22A	DC24V, 16pt, Sink/Source	
	XGI-D22B	DC24V, 16pt, Source	
	XGI-D24A	DC24V, 32pt, Sink/Source	
	XGI-D24B	DC24V, 32pt, Source	
	XGI-D28A	DC24V, 64pt, Sink/Source	
	XGI-D28B	DC24V, 64pt, Source	
	Output	XGQ-RY1A	Relay, 8pt
		XGQ-RY2A	Relay, 16pt
		XGQ-RY2B	Relay, 16pt, Surge killer
XGQ-SS2A		Triac, 16pt	
XGQ-TR2A		Transist, 16pt, Sink	
XGQ-TR2B		Transist, 16pt, Source	
XGQ-TR4A		Transist, 32pt, Sink	
XGQ-TR4B		Transist, 32pt, Source	
XGQ-TR8A		Transist, 64pt, Sink	
XGQ-TR8B	Transist, 64pt, Source		
Input/output	XGH-DT4A	DC24V 16pt, Transist, 16pt, Sink	

Communication module		
RAPIenet	XGL-EIMT	RAPIenet Twisted pair
	XGL-EIMH	RAPIenet Twisted pair/ Fiber
	XGL-EIMF	RAPIenet Fiber optic 2ch
	XOL-EIMT	RAPIenet Twisted pair 2ch
	XOL-EIMF	RAPIenet Fiber optic 2ch (PC)
Cnet	XGL-CH2A	RS-232C/RS-422
	XGL-C22A	RS-232C, 2ch
	XGL-C42A	RS-422, 2ch
Ethernet	XGL-EFMF	Fiber optic, Open type
	XGL-EFMT	Twisted pair, Open
	XGL-ESHF	Fast Ethernet type (Industrial optic ring)
Ethernet/IP	XGL-EHST	Fast Ethernet switch hub
	XGL-EIPT	Industrial Ethernet, 2ports
Dedicated	XGL-EDMF	Fiber optic, Dedicated
	XGL-EDMT	Ethernet Twisted pair, Dedicated Ethernet
Rnet	XGL-RMEA	Rnet, Master
Dnet	XGL-DMEA	DeviceNet, Master
Pnet	XGL-PMEA	Profibus-DP, Master
	XGL-PMEC	
Fnet	XGL-FMEA	Dedicated network


Special module		
Analog input	XGF-AV8A	Voltage, 8ch
	XGF-AC8A	Current, 8ch
	XGF-AD8A	Voltage /Current, 8ch
	XGF-AD4S	Voltage /Current, 4ch,
	XGF-AD16A	Insulation Voltage /Current, 16ch
	XGF-AW4S	2-wire, Voltage/ Current input, 4Ch (Isolated)
Analog output	XGF-DV4A	Voltage, 4ch
	XGF-DC4A	Current, 4ch
	XGF-DV8A	Voltage, 8ch
	XGF-DC8A	Current, 8ch
	XGF-DV4S	Voltage, 4ch, Insulation
Analog input/output	XGF-DC4S	Current, 4ch, Insulation
	XGF-AH6A	Input: 4ch, Voltage/ Current Output: 2Ch Voltage/ Current
High speed counter	XGF-HO2A	Open collector, 2ch
	XGF-HD2A	Line drive, 2ch
Positioning	XGF-P01A-P03A	Open collector, 1~3axis
	XGF-PD1A-PD3A	Line drive, 1~3axis
	XGF-P01H-P04H	Open collector, 1~4axis
	XGF-PD1H-PD4H	Line drive, 1~4axis
Temperature input	XGF-TC4S	Thermo couple, 4ch, Insulation
	XGF-RD4A	RTD, 4ch
	XGF-RD4S	RTD, 4ch, Insulation
Temperature controller	XGF-TC4UD	4 loops, Insulation
Event input	XGF-SOEA	DC24V, 32points

Cable		
Item	Product	Description
Expansion cable	XGC-E041	0.4m
	XGC-E061	0.6m
	XGC-E121	1.2m
	XGC-E301	3.0m
	XGC-E501	5.0m
	XGC-E102	10m
	XGC-E152	15m
Termination connector	XGT-TERA	Termination connector for expansion base download cable
USB cable	USB-301A	USB download cable
RS232C cable	K1C-050A	RS232C download cable
Dummy	XGT-DMMA	Dummy module


XGR module		
CPU	XGR-CPUH/T	Twisted pair
	XGR-CPUH/F	Fiber optic
Power	XGR-AC12	110V, 5.5A(Main base)
	XGR-AC13	110V, 8.5A(Expansion base)
	XGR-AC22	220V, 5.5A(Main base)
	XGR-AC23	220V, 8.5A(Expansion base)
Base	XGR-M06P	6Slot(Main base)
	XGR-E12P	12Slot(Expansion base)
Expansion drive	XGR-DBST	Twisted pair - Twisted
	XGR-DBSF	pair Fiber optic - Fiber optic
	XGR-DBSH	Twisted pair - Fiber optic
Sync & Expansion cable	XGC-F201	2m (Fiber optic)
	XGC-F501	5m (Fiber optic)

Dimensions


• Base

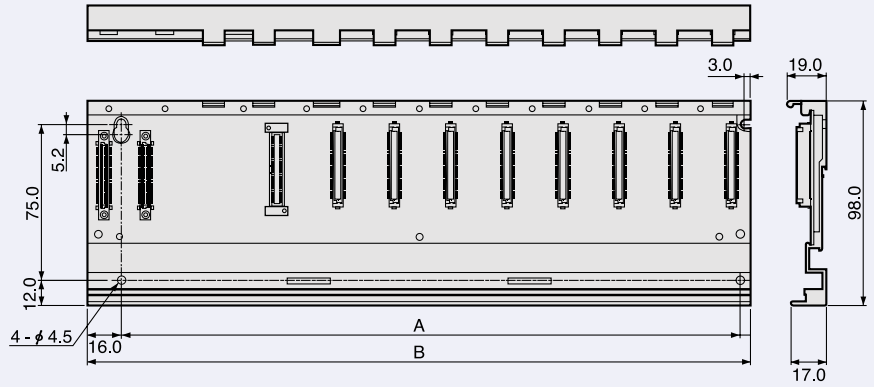

• Power module

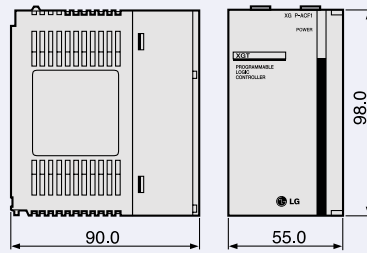

• CPU and I/O module




Base Dimensions (W)

Item	XGB-M04A/E04A	XGB-M06A/E06A	XGB-M08A/E08A	XGB-M12A/E12A
A	190	244	298	406
B	210	264	318	426


XGR Dimensions

Dimensions


• Base base

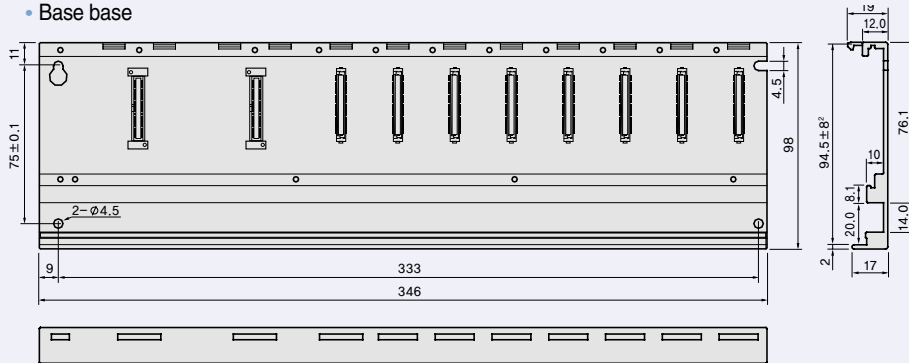


• Expansion base

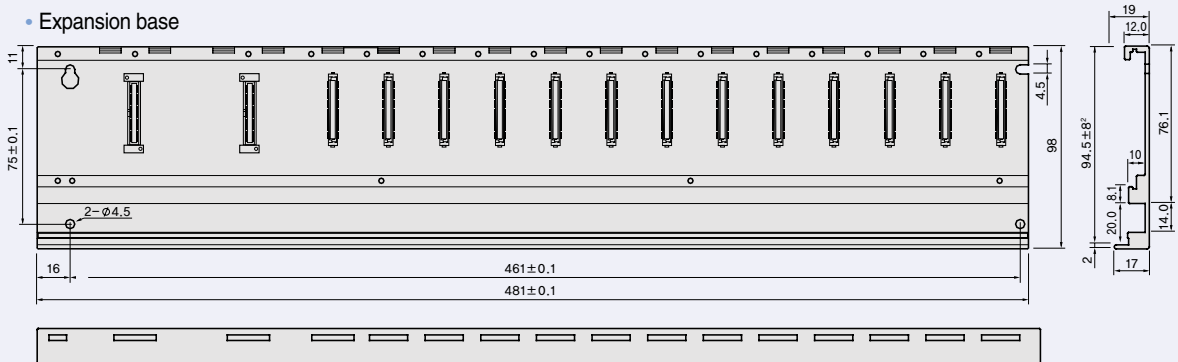

• Power and CPU

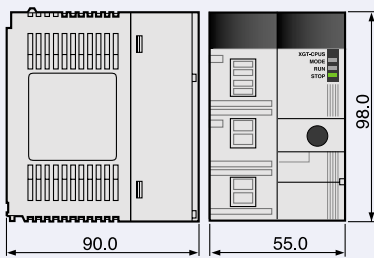

• I/O



Base Dimensions (W)

Item	XGR-M06P	XGR-E12P
A	333	461
B	346	481

Leading Innovation, Creating Tomorrow 



Safety Instructions

- For your safety, please read user's manual thoroughly before operating.
- Contact the nearest authorized service facility for examination, repair, or adjustment.
- Please contact qualified service technician when you need maintenance. Do not disassemble or repair by yourself!
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.

© 2005.11 LS Industrial Systems Co.,Ltd. All rights reserved.

LS Industrial Systems Co., Ltd.

www.lsis.biz


■ **HEAD OFFICE**

LS Tower 1026-6, Hogue-dong, Dongan-gu, Anyang-si,
Gyeonggi-do 431-848, Korea

- **NORTH AMERICA/EUROPE/CIS** +82-2-2034-4676 / sukyong@lsis.biz
- **ASIA/LATIN AMERIC** +82-2-2034-4888 / cshwang@lsis.biz
- **MIDDLE EAST/AFRICA/TURKEY** +82-2-2034-4881 / khchoi1@lsis.biz

■ **Global Network**

- **LS Industrial Systems (Middle East) FZE >> Dubai, U.A.E.**
Address: LOB 19 JAFZA VIEW TOWER Room 205, Jebel Ali Freezone P.O. Box 114216, Dubai, United Arab Emirates
Tel: 971-4-886 5360 Fax: 971-4-886-5361 e-mail: jungyong@lsis.biz
- **Dalian LS Industrial Systems Co., Ltd. >> Dalian, China**
Address: No.15, Liaohezi 3-Road, Economic and Technical Development zone, Dalian 116600, China
Tel: 86-411-8273-7777 Fax: 86-411-8730-7560 e-mail: lixk@lsis.com.cn
- **LS Industrial Systems (Wuxi) Co., Ltd. >> Wuxi, China**
Address: 102-A, National High & New Tech Industrial Development Area, Wuxi, Jiangsu, 214028, P.R.China
Tel: 86-510-8534-6666 Fax: 86-510-522-4078 e-mail: xuhg@lsis.com.cn
- **LS-VINA Industrial Systems Co., Ltd. >> Hanoi, Vietnam**
Address: Nguyen Khe - Dong Anh - Ha Noi - Viet Nam
Tel: 84-4-882-0222 Fax: 84-4-882-0220 e-mail: srjo@lsisvina.com
- **LS-VINA Industrial Systems Co., Ltd. >> Hochiminh, Vietnam**
Address: 41 Nguyen Thi Minh Khai Str. Yoco Bldg 4th Floor, Hochiminh City, Vietnam
Tel: 84-8-3822-7941 Fax: 84-8-3822-7942 e-mail: sbpark@lsisvina.com
- **LS Industrial Systems Tokyo Office >> Tokyo, Japan**
Address: 16FL, Higashi-Kan, Akasaka Twin Tower 17-22, 2-chome, Akasaka, Minato-ku Tokyo 107-8470, Japan
Tel: 81-3-3582-9128 Fax: 81-3-3582-2667 e-mail: jschuna@lsis.biz
- **LS Industrial Systems Shanghai Office >> Shanghai, China**
Address: Room E-G, 12th Floor Huamin Empire Plaza, No.726, West Yan'an Road Shanghai 200050, P.R. China
Tel: 86-21-5237-9977 (609) Fax: 89-21-5237-7191 e-mail: jinhk@lsis.com.cn
- **LS Industrial Systems Beijing Office >> Beijing, China**
Address: B-Tower 17FL Beijing Global Trade Center B/D. No.36, BeiSanHuanDong-Lu, DongCheng-District, Beijing 100013, P.R. China
Tel: 86-10-5825-6025,7 Fax: 86-10-5825-6026 e-mail: cuixiaorong@lsis.com.cn
- **LS Industrial Systems Guangzhou Office >> Guangzhou, China**
Address: Room 1403,14F, New Poly Tower, 2 Zhongshan Liu Road, Guangzhou, P.R. China
Tel: 86-20-8326-6764 Fax: 86-20-8326-6287 e-mail: linsz@lsis.biz
- **LS Industrial Systems Chengdu Office >> Chengdu, China**
Address: Room 1701 17Floor, huanminhanjun international Building, No1 Fuxing Road Chengdu, 610041, P.R. China
Tel: 86-28-8670-3101 Fax: 86-28-8670-3203 e-mail: yangcf@lsis.com.cn
- **LS Industrial Systems Qingdao Office >> Qingdao, China**
Address: 7B40, Haixin Guangchang Shenye Building B, No.9, Shandong Road Qingdao 26600, P.R. China
Tel: 86-532-8501-6568 Fax: 86-532-583-3793 e-mail: lijr@lsis.com.cn

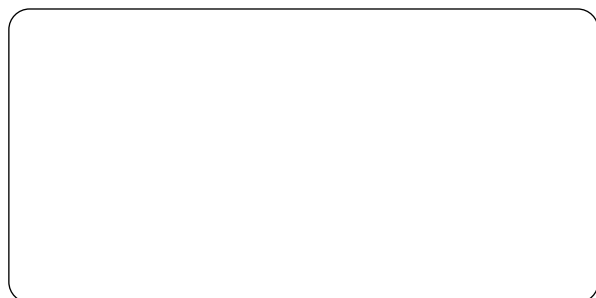

Specifications in this catalog are subject to change without notice due to continuous product development and improvement.