




Flexible Conductors

Solutions to Optimize the Design
of Electrical Power & Earth/Ground
Connections

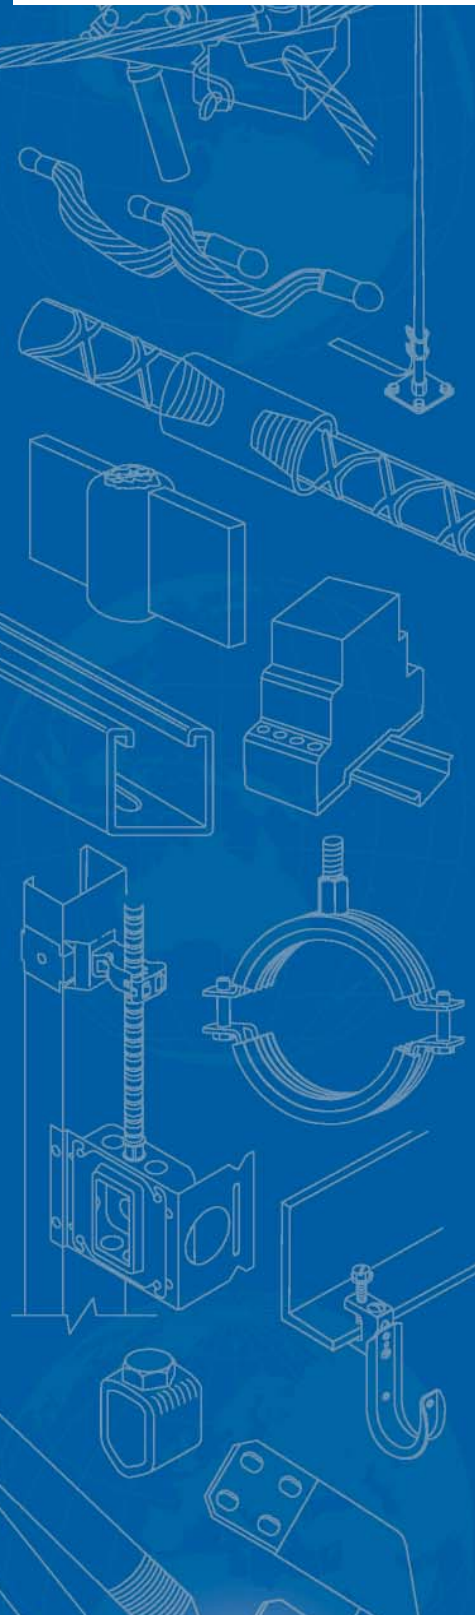

+1-604-817-0987

westshorecontrols@gmail.com

Fax : +1-604-943-1661

www.westshorecontrols.com

ERICO®

WARNING

ERICO products shall be installed and used only as indicated in ERICO's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

WARRANTY

ERICO products are warranted to be free from defects in material and workmanship at the time of shipment. NO OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED (INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), SHALL EXIST IN CONNECTION WITH THE SALE OR USE OF ANY ERICO PRODUCTS. Claims for errors, shortages, defects or nonconformities ascertainable upon inspection must be made in writing within 5 days after Buyer's receipt of products. All other claims must be made in writing to ERICO within 6 months from the date of shipment or transport. Products claimed to be nonconforming or defective must, upon ERICO's prior written approval in accordance with its standard terms and procedures governing returns, promptly be returned to ERICO for inspection. Claims not made as provided above and within the applicable time period will be barred. ERICO shall in no event be responsible if the products have not been stored or used in accordance with its specifications and recommended procedures. ERICO will, at its option, either repair or replace nonconforming or defective products for which it is responsible or return the purchase price to the Buyer. THE FOREGOING STATES BUYER'S EXCLUSIVE REMEDY FOR ANY BREACH OF ERICO WARRANTY AND FOR ANY CLAIM, WHETHER SOUNDING IN CONTRACT, TORT OR NEGLIGENCE, FOR LOSS OR INJURY CAUSED BY THE SALE OR USE OF ANY PRODUCT.

LIMITATION OF LIABILITY

ERICO excludes all liability except such liability that is directly attributable to the willful or gross negligence of ERICO's employees. Should ERICO be held liable its liability shall in no event exceed the total purchase price under the contract. ERICO SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS OF BUSINESS OR PROFITS, DOWNTIME OR DELAY, LABOR, REPAIR OR MATERIAL COSTS OR ANY SIMILAR OR DISSIMILAR CONSEQUENTIAL LOSS OR DAMAGE INCURRED BY BUYER.



	Flexible conductors for multiple applications	4-5
	Certificates & software	6
	Product overview	7
	ERICO® FLEXIBAR® Insulated flexible busbar	8-15
	ERICO FLEXIBAR accessories	16-19
	Hydraulic and manual tools for busbar & ERICO FLEXIBAR	20-21
	Insulated braided conductor (IBS, IBSB & IBSBR)	22-29
	Earth/ground copper braids (MBJ & BJ)	30-31
	Earth/ground stainless steel braids (CPI)	32-33
	Power shunt (PBC, PBCR & PPS)	34-35
	Flat copper & stainless steel braids in coils (FTCB, FRCB, FSSB & FTCBI)	36
	Round and tubular copper braids in coils (RTCBI, RTCB, RRCB, RRCBI & TTCE)	37-38
	Make your own braided connections	39
	Made-to-order solutions	40-41
	Cross reference list	42-44

Flexible Conductors for Low-Voltage Industrial Applications

The ERICO Advantages

- A solution provider with strong expertise in a variety of markets worldwide
- A worldwide team of experts in electrical power connections
- Experienced manufacturer and global provider
- Full range of high-quality, reliable, certified products
- Innovative and compatible product designs
- Easy to use – saves time and space
- Maximize power density



Energy

- Electrical Power Generators and Distribution
 - Transformers
 - Generators
- Renewable Energies
 - Windmills
 - Solar
 - Hydropower
- Oil, Gas and Petrochemical
- Telecom
- Power Stations




Transportation

- Marine
- Aircraft
- Ground Transportation
- Automotive

Industry & Buildings

- Buildings & Shopping Centers
- Air Conditioning
- Elevators, Escalators & Automatic Doors

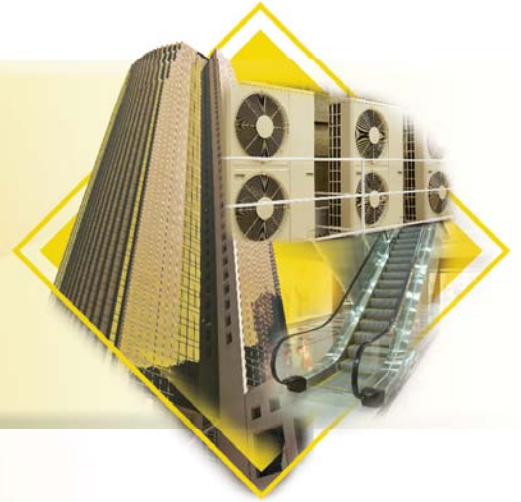

Panelboard

- Power
- Control & Command Applications:
 - Power Switchboards
 - Distribution Panel
 - UPS
 - Power Factory Correction




Machinery

- Tunneling
- Crushers
- Printing
- Welding
- Packaging
- Wood Working




Flexible Conductors for Multiple Applications


ERICO is trusted for producing high quality flexible conductors for low voltage power connections. Flexible conductors made out of braids or laminates are used in a variety of applications for current transfer or grounding/earthing connections.

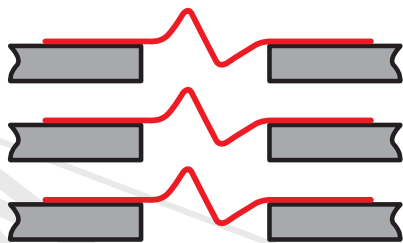


Expansion connections for busbar system

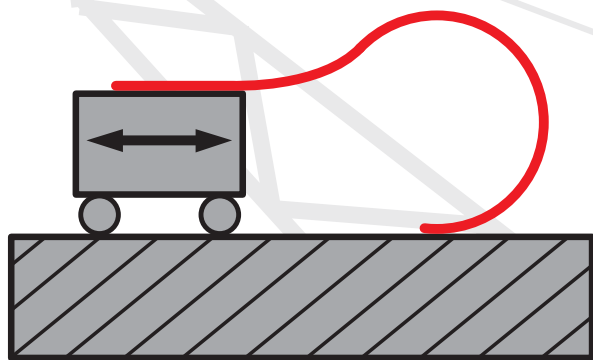


Flexible connection between fixed and moving parts

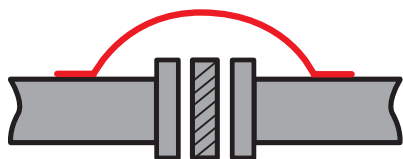


Earthing/grounding interconnection
(Example: pipeline)

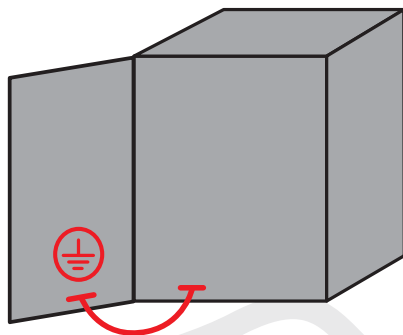


Earthing/grounding connection with
excellent electro-magnetic compatibility

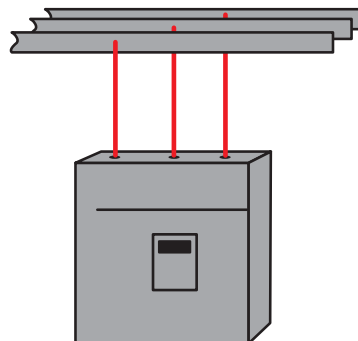

Busbar and active electrical component
connection (Example: circuit breaker,
contactor) including most compact
components on the market

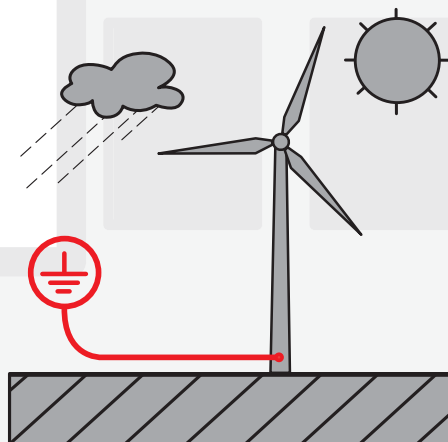

Outdoor/offshore application or difficult
environment (Example: abrasion,
corrosion, UV...)

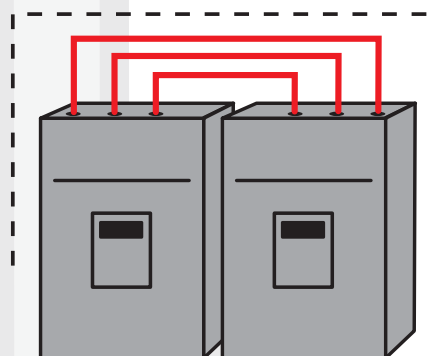


Short and compact connection between
electrical components for volume
reduction



Flexible Conductors for Multiple Applications




Worldwide certifications, applications and product availability

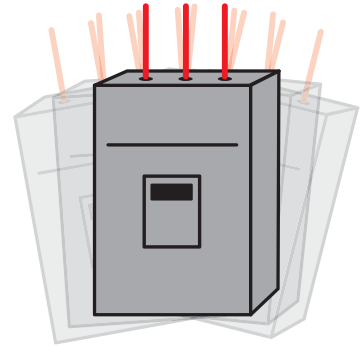


Vibration and reliability solution for connection

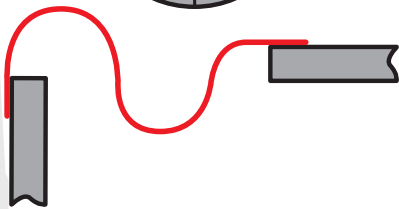


Reduce time assembly or maintenance connection

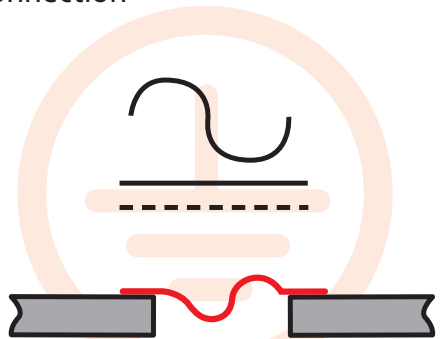


Connection for alternating current or direct current application

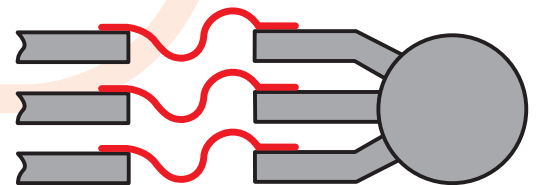

Motor, generator or transformer connection with busbar system

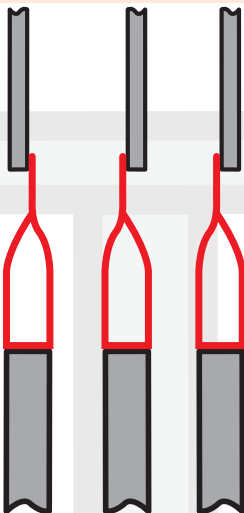

Power connection between horizontal and vertical system

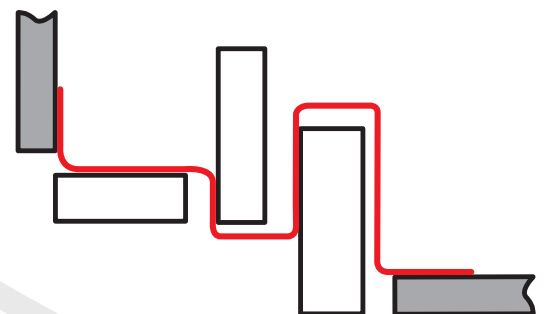

Complicated and difficult connection for specific application

Certificates & ERICO Software

Tests & Certificates

ERICO components have received conformity certificates from several agencies/standards.

Worldwide Certification

UL® CSA® IEC GOST



ABS® VERITAS CE

Interactive ERIFLEX Software Available Online from ERICO

With the click of a mouse, ERICO makes it easy to create a technical panel layout with all of the necessary components. Available at www.erico.com/eriflex, this interactive software walks the user through the creation of a project with easy to follow instructions. The software features updated pricelists, informative product datasheets and a project installation calculator.

Whether you're interested in making a complete low-voltage busbar system or a distribution kit, or if you need to determine a flexible connection with ERICO® FLEXIBAR®, you can trust ERICO software to help simplify the process.

In fact, the software will provide you with technical and commercial datasheets dedicated to your project.

For more information or to request your personal login information, contact your local ERICO representative or visit www.erico.com/eriflex.

Early involvement of ERICO experts results in optimal solutions:

- Compact Solution
- Quality Environment
- Compliance
- Cost Effective

Agency/Standard Approvals



International Electrotechnical Commission
IEC 60439.1 Standard
IEC 61439.1 Standard



Underwriters Laboratories
UL Recognized, File No. E125470
UL Recognized, File No. E220029
UL Recognized, File No. E316390



UL Listed, File No. E220029



Canadian Standards Association
CSA Certified, File No. LL 90005



ABS American Bureau of Shipping
Certificate No. 08-HS365878-1-PDA-DUP &
Certificate No. 13-HS1018106-1-PDA-DUP
Marine & Offshore Applications



European Conformity



Bureau VERITAS
Certificate No. 02859 / DO BV for
shipboard use



GOST
Certificate compliance for Russia








RoHS Compliant



www.erico.com/eriflex

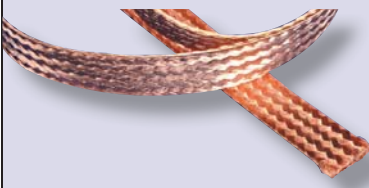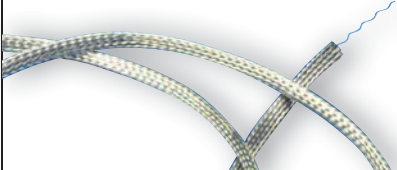

Product Range	Typical Uses	Typical Market
Insulated flexible busbar (ERICO® FLEXIBAR®) 	• Heavy-duty power interconnection • Overcome vibration/alignment problems • Circuit breaker, generator & prefabricated power network conductor • Expansion joints • Variable terminating positions • Machine connections • Movable connection from massive busbar system • Alternative to large & multiple cables • Alternative to rigid busbar	• Switchgear & control equipment • Transport • Electrical equipment manufacturers • Power generation • Machinery manufacturer
Insulated braided conductor (IBS, IBSB & IBSBR) 	• Interconnects for low voltage power distribution units • IBSB specially designed for industrial circuit breaker connection • Overcome vibration/alignment problems • Battery connections • Earth/ground connections	• Switchgear & control equipment • Transport • Electrical equipment manufacturers • Power generation
Power shunt (PBC, PBCR & PPS) 	• Transformer or generator to busbar connection • Overcome vibration/alignment problems • Power interconnection	• Switchgear & control equipment • Power distribution • Transportation
Earth/ground copper braids (MBJ & BJ) 	• Power, earthing/grounding and equipotential connections • Electrical bonding enclosure door • EMI effect reduction application	• Switchgear & control equipment • Rail transportation • Electrical equipment manufacturers • Power generation (wind, solar) • Data center
Earth/ground stainless steel braids (CPI) 	• Earthing/grounding and equipotential connections • Superior abrasion, corrosion, chemical, and UV resistance for outdoor applications • Expansion joints • Connections for lightning protection systems	• Transportation • Food and beverage industry • Power generation (wind, solar) • Chemical and oil industry • Automotive • Defense & aerospace • Civil construction • Urban projects
Flat and round copper braids in coils 	• Earth/ground connections • Power interconnection • Lightning protection • Flexible links • Overcome vibration/alignment problems	• Defense & aerospace • Rail transportation • Automotive • Electronics • General electrical sector • Civil construction
Tubular copper braids in coils 	• Screening of cables from electromagnetic, electrostatic and RF interference • Mechanical support • Protection against abrasion and corrosion • EMC & EMH applications	• Defense & aerospace • Transportation • Electronics & communication • Cable harness & assembly makers • Component distributors

ERICO® FLEXIBAR® - Insulated Flexible Busbar

NEW Generation Flexible Busbar

Patent pending insulation on ERICO FLEXIBAR



Superior Flexibility

ERICO's exclusive manufacturing process offers superior flexibility:

- Copper laminates are free to slide within the insulation
- High insulation quality
- Wide variety of bending, twisting & folding possibilities

NEW

Innovative patent pending insulation*

ERICO FLEXIBAR has added grooves on the inner surface of the insulation sleeve to improve sliding between the central conductor and the insulation material. The grooves help reduce the contact surface between the central conductor and the insulation material. This results in improved flexibility of the flexible busbar. Result: <20% of the inner surface is in contact with the central conductor. This ERICO patent-pending idea makes ERICO FLEXIBAR more flexible than ever, and allows users to optimize the design of their electrical power connection.

* This patent is applicable for the cross section indication by “**” on the part number. Refer to table on page 13




ERICO FLEXIBAR Flexible Busbar - a preferred conductor

- ERICO FLEXIBAR is formed with multiple layers of thin electrolytic copper, available in plain or tin plated
- ERICO FLEXIBAR connections are made by punching directly through the laminates. There are no lugs to purchase, helping to eliminate faulty connection problems and making installation simpler and faster
- The insulation is a high-resistance, self-extinguishing PVC or silicone compound
- Traceability code and designation Part Number on product
- Easily formed, ERICO FLEXIBAR improves assembly flexibility and aesthetics of panels
- Ideal alternative to large cable & rigid busbar
- Quality: 100% production dielectric tested
- Full range from 24 mm² up to 1200 mm²



Diverse Applications

- Usage -25°C up to 105°C (-13°F up to 221°F)
ERICO FLEXIBAR
- Nominal voltage = 1000 V AC/1500 V DC (IEC & UL®)
- Self-extinguishable
- High mechanical resistance
- High elongation value
- High current withstanding
- High copper quality (99.9% purity)
- High conductivity

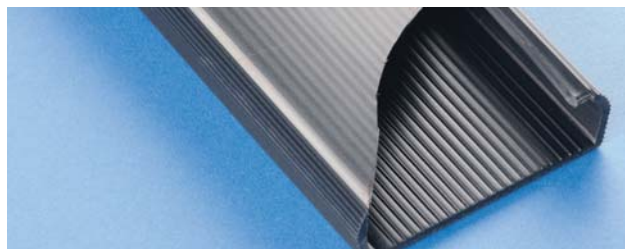

Connection Types

- Between main power and distribution equipment (contactors, circuit-breakers...)
- Between transformer and busduct
- Between busduct and electrical cabinet

Space/Weight Savings

- Requires less installation space when compared to cable
- Reduces the length and number of conductors, reducing weight
- Insulation allows for closer spacing than traditional busbar designs.

Cost Savings

- Eliminates cost and installation of lugs
- Reduces inventory costs

Improves Reliability


- Connection is made directly to ERICO FLEXIBAR thus eliminating the cable lug connection
- Excellent resistance to vibration
- No crimping

Aesthetics

- Improves design flexibility and panel access

Ease of Installation

- Installation is facilitated through the ease of bending and shaping even large sizes

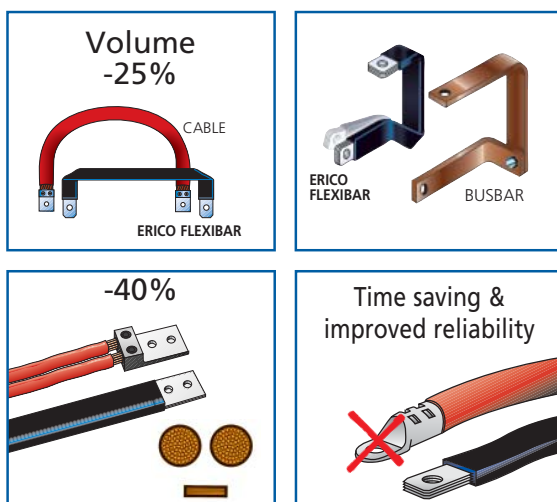

Skin Effect on A.C. Application


Comparison of the penetration depth between:

1 x 95 mm² Copper Cable — OR — 1 x ERICO FLEXIBAR
2 x 20 x 1

95 mm²

250 A

40 mm²



58%
Smaller




2 x 150 mm² Copper Cables — OR — 1 x ERICO FLEXIBAR
5 x 32 x 1

300 mm²

630 A

160 mm²



47%
Smaller



3 x 185 mm² Copper Cables — OR — 1 x ERICO FLEXIBAR
6 x 50 x 1

555 mm²

1000 A

300 mm²



46%
Smaller




■ = Conductor
■ = Reduced Conductivity
■ = Insulation

Representative to scale.

ERICO FLEXIBAR intensity and cable intensity are based on conductor temperature rise of 50°C.



ERICO® FLEXIBAR® Technical Characteristics

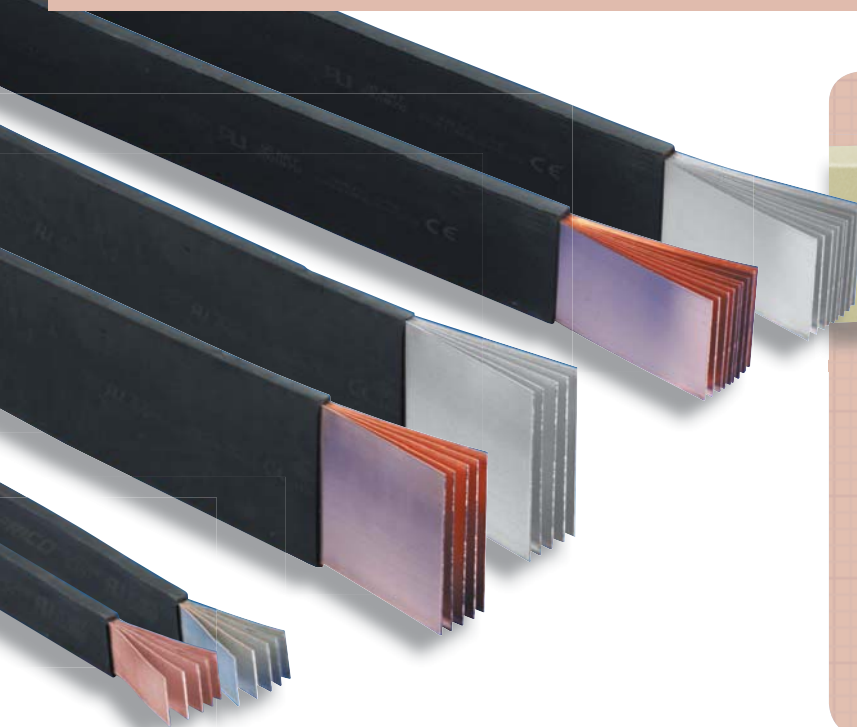

ERICO FLEXIBAR Insulated Flexible Busbar Technical Characteristics

- Conductor is electrolytic copper (Cu-ETP)
- Insulation is high-resistance vinyl compound:
 - Elongation: 370%
 - Maximum working temperature: 105°C
 - Minimum working temperature: -25°C
 - Thickness: 2 mm ± 0,2
 - Self-extinguishing: UL® 94 VO
 - Dielectric strength: 20kV/mm

Selection of ERICO FLEXIBAR according to the internal temperature of the panel

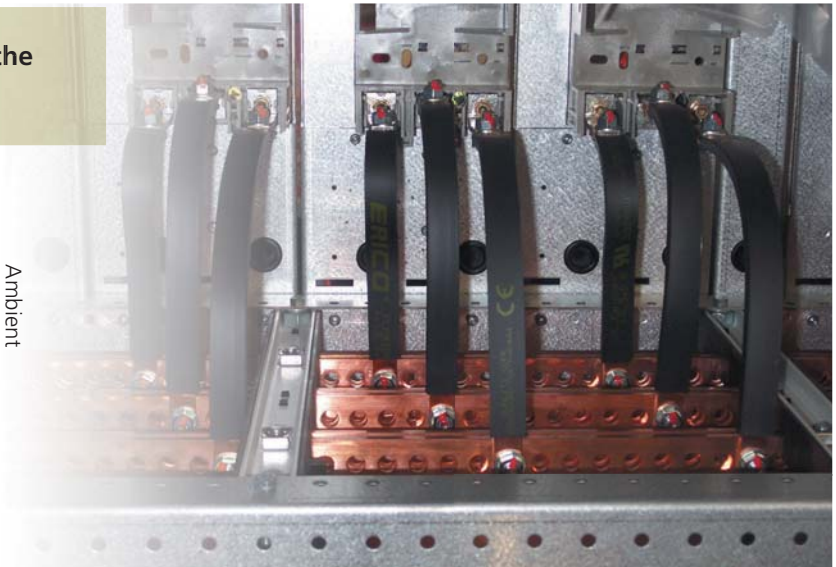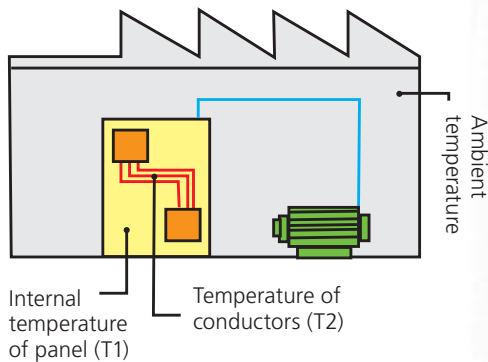

Temperature rise of conductor = $T2 - T1 = \Delta T$ (K)

Ex: For a current of 630A, with: $T1 = 40^{\circ}\text{C}$ - $T2 = 90^{\circ}\text{C}$

- 1) $\Delta T = 90 - 40 = 50\text{K}$
- 2) In the 50°K column, find the closest current value to 630A. ERICO FLEXIBAR 5x32x1 - 552650 - 160 mm² - 640A.
- 3) Select ERICO FLEXIBAR according to the terminal width of the equipment being connected.

K = Kelvin degree (temperature calculated, but not measurable)

ERICO FLEXIBAR in parallel


When using 2 or 3 ERICO FLEXIBAR on edge in parallel for the same phase, use the coefficient:

Ex: $5 \times 32 \times 1 - \Delta T^{\circ} = 50\text{ K}$: 640 A

2 bars in parallel $> 640\text{ A} \times 1,72 = 1100\text{ A}$


3 bars in parallel $> 640\text{ A} \times 2,25 = 1440\text{ A}$

ERICO® FLEXIBAR® Technical Characteristics

A	Part Number				Section mm²	ΔT (K)						Current Coefficient			
		N	A	B		70	60	50	40	30	20				
125 A	552400	8	x	6	x	0,5	24	196	182	166	143	128	105	1,72	2,25
	552410	3	x	9	x	0,8	21,6	158	147	134	120	104	85	1,72	2,25
	552420	6	x	9	x	0,8	43,2	290	269	245	220	190	155	1,72	2,25
	552440	3	x	13	x	0,5	19,5	198	184	167	150	130	106	1,72	2,25
	552390	2	x	15,5	x	0,8	24,8	252	234	212	191	165	134	1,72	2,25
250 A	552430	9	x	9	x	0,8	64,8	314	291	265	237	206	168	1,72	2,25
	552450	6	x	13	x	0,5	39	300	277	253	226	196	160	1,72	2,25
	552460	4	x	15,5	x	0,8	49,6	380	350	320	286	248	202	1,72	2,25
	552490	2	x	20	x	1	40	326	300	275	246	214	174	1,72	2,25
	552500	3	x	20	x	1	60	428	395	360	323	280	228	1,72	2,25
	552550	2	x	24	x	1	48	450	416	380	340	295	240	1,72	2,25
	552470	6	x	15,5	x	0,8	74,4	476	440	402	360	318	254	1,72	2,25
	552480	10	x	15,5	x	0,8	124	538	498	455	407	352	288	1,72	2,25
	552510	4	x	20	x	1	80	476	440	402	360	312	254	1,72	2,25
	552520	5	x	20	x	1	100	498	460	420	376	326	266	1,72	2,25
	552530	6	x	20	x	1	120	546	506	462	413	358	292	1,72	2,25
	552560	3	x	24	x	1	72	490	453	413	370	320	261	1,72	2,25
	552570	4	x	24	x	1	96	550	510	465	416	360	294	1,72	2,25
	552620	2	x	32	x	1	64	480	445	406	363	315	257	1,72	2,25
	552630	3	x	32	x	1	96	570	525	480	430	372	304	1,72	2,25
	552690	2	x	40	x	1	80	538	500	455	406	352	288	1,72	2,25
	552580	5	x	24	x	1	120	608	563	514	460	398	325	1,72	2,25
	552590	6	x	24	x	1	144	670	620	566	506	438	358	1,72	2,25
	552640	4	x	32	x	1	128	648	600	548	490	425	347	1,72	2,25
	552700	3	x	40	x	1	120	617	570	522	466	405	330	1,72	2,25
	552710	4	x	40	x	1	160	727	673	615	550	476	389	1,72	2,25
	552760	3	x	50	x	1	150	700	650	592	530	460	374	1,72	2,25
	552540	10	x	20	x	1	200	762	706	645	576	500	408	1,72	2,25
	552600	8	x	24	x	1	192	802	743	678	606	525	429	1,72	2,25
	552650	5	x	32	x	1	160	758	702	640	573	496	405	1,72	2,25
	552660	6	x	32	x	1	192	846	783	715	640	555	452	1,72	2,25
	552720	5	x	40	x	1	200	900	832	760	680	590	481	1,72	2,25
	552770	4	x	50	x	1	200	860	795	727	650	563	460	1,72	2,25
	552610	10	x	24	x	1	240	948	877	800	716	592	506	1,72	2,25
	552670	8	x	32	x	1	256	1018	943	860	770	667	544	1,72	2,25
	552730	6	x	40	x	1	240	1018	943	860	770	667	544	1,72	2,25
	552780	5	x	50	x	1	250	1100	1016	930	830	718	588	1,72	2,25
	552830	4	x	63	x	1	252	1010	935	855	763	661	541	1,65	2,12
	552880	3	x	80	x	1	240	980	906	827	740	640	523	1,65	2,12
	552680	10	x	32	x	1	320	1230	1140	1040	930	805	658	1,72	2,25
	552740	8	x	40	x	1	320	1230	1140	1040	930	805	658	1,72	2,25
	552750	10	x	40	x	1	400	1400	1295	1181	1055	915	747	1,72	2,25
	552790	6	x	50	x	1	300	1225	1135	1035	925	802	655	1,72	2,25
	552800	8	x	50	x	1	400	1393	1290	1175	1050	912	743	1,72	2,25
	552840	5	x	63	x	1	315	1220	1125	1030	920	797	651	1,65	2,12
	552850	6	x	63	x	1	378	1437	1330	1215	1085	941	768	1,65	2,12
	552890	4	x	80	x	1	320	1200	1110	1015	906	785	642	1,65	2,12
	552900	5	x	80	x	1	400	1390	1285	1175	1050	910	743	1,65	2,12
	552810	10	x	50	x	1	500	1650	1525	1395	1245	1080	882	1,72	2,25
	552860	8	x	63	x	1	504	1650	1525	1395	1245	1080	882	1,65	2,12
	552910	6	x	80	x	1	480	1627	1505	1375	1230	1065	870	1,65	2,12
	552950	5	x	100	x	1	500	1635	1515	1385	1235	1070	876	1,6	2,02
	552960	6	x	100	x	1	600	1843	1705	1550	1393	1205	980	1,6	2,02
	552870	10	x	63	x	1	630	1895	1755	1600	1435	1240	1012	1,65	2,12
	552920	8	x	80	x	1	640	1895	1755	1600	1430	1240	1012	1,65	2,12
	552930	10	x	80	x	1	800	2100	1945	1775	1585	1375	1123	1,65	2,12
	552970	8	x	100	x	1	800	2147	1990	1815	1625	1405	1148	1,6	2,02
	552980	10	x	100	x	1	1000	2350	2170	1985	1775	1535	1255	1,6	2,02
	552990	12	x	100	x	1	1200	2500	2315	2115	1890	1636	1338	1,6	2,02
	538650	10	x	120	x	1	1200	2755	2550	2330	2070	1792	1474	1,49	1,95

ADMISSIBLE CURRENTS: This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.

ERICO® FLEXIBAR® Certifications & Approvals

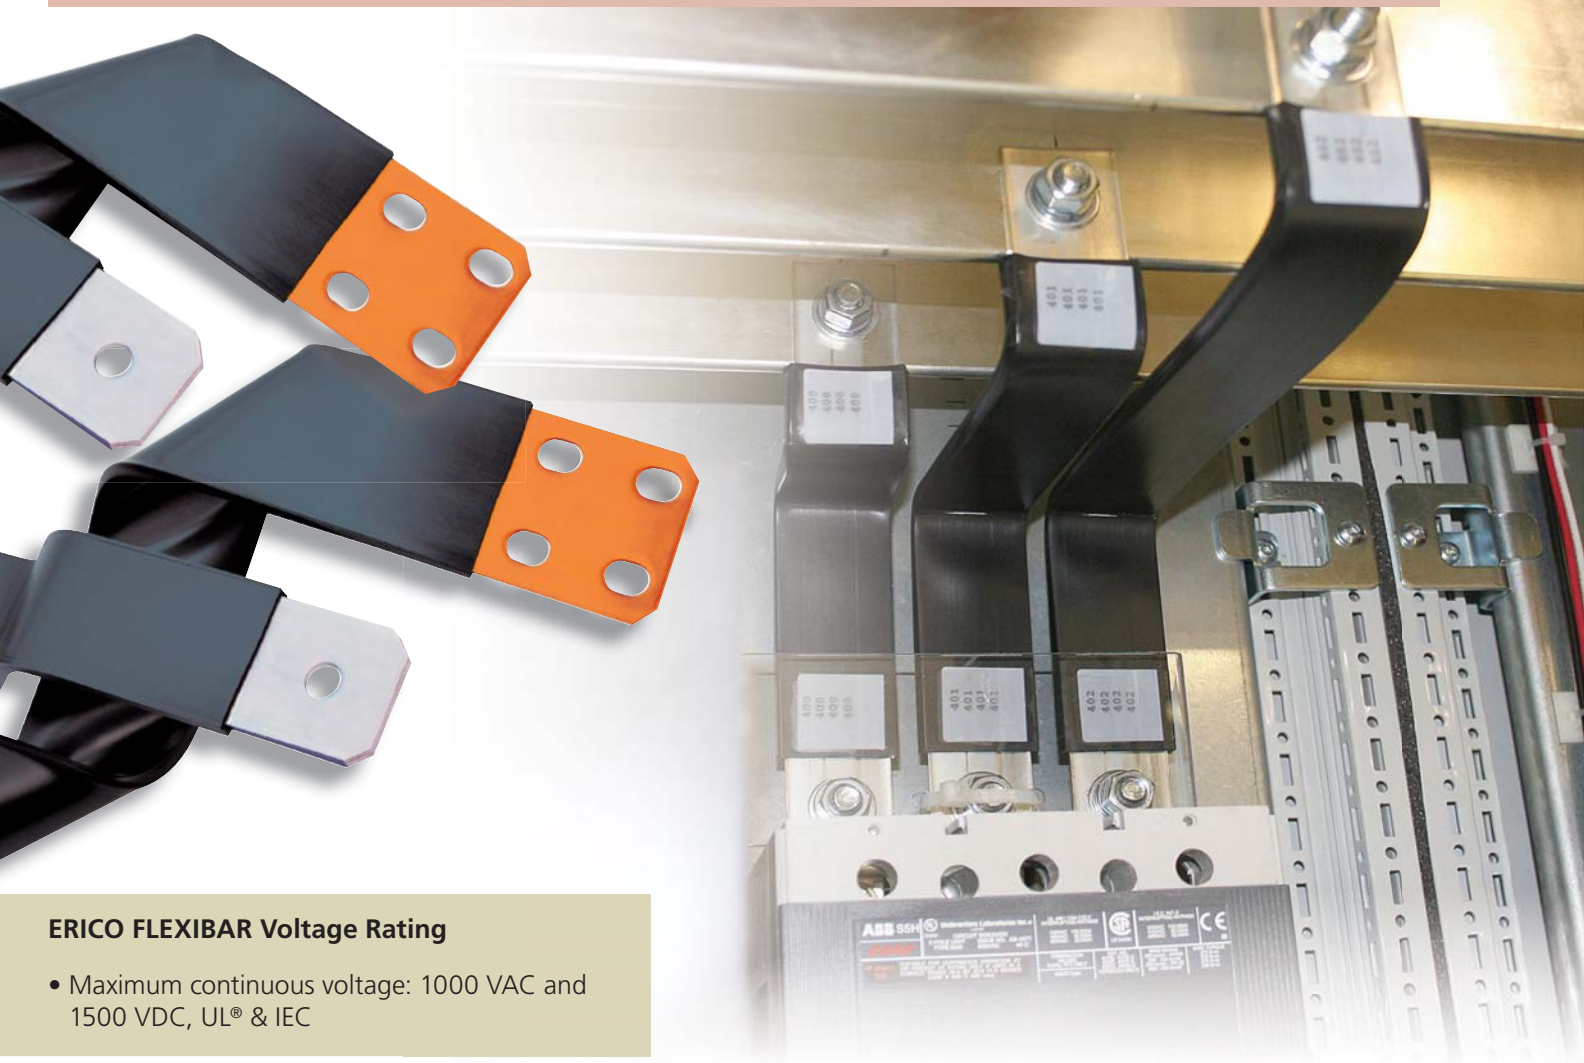

ERICO FLEXIBAR Voltage Rating

- Maximum continuous voltage: 1000 VAC and 1500 VDC, UL® & IEC

ERICO FLEXIBAR Insulated Flexible Busbar Certification & Approvals

- International Commission Electrotechnique (IEC) - Meets all requirements of IEC 60439.1 & IEC 61439.1
- UL 67 Recognized component in the "Panelboard and Switchboard accessories - component" category (UL file E125470) for US and Canadian territory
- UL 758 Recognized component in the "Appliance wiring material - component" category style 10531 (UL file E316390) and category style 11343 (UL file E316390)
- Veritas Certified - No. 02859/DOBV. Ship application
- Canadian Standards Association - CSA® certified as appliance wiring material for a maximum of 1000 volts. File N° 090005 (CAN/CSA - C22.2)
- American Bureau of Shipping (ABS®) - Certificate No. 08-HS365878-1-PDA-DUP - Marine & Offshore Applications
- CE Conformity
- GOST Certificate Compliance - for Russia
- RoHS Compliance
- Class II Conductors (IEC 61439-1, Chapter 8.4.4 - Protection by total insulation)



ERICO® FLEXIBAR® Part Numbers

2 Meters Red Copper

Part Number	ERICO FLEXIBAR Description		 Kg
552400	2M 8 x 6 x 0,5	10	0,35
552410	2M 3 x 9 x 0,8	10	0,43
552420	2M 6 x 9 x 0,8	10	0,81
552430	2M 9 x 9 x 0,8	10	1,19
552440	2M 3 x 13 x 0,5	10	0,45
552450	2M 6 x 13 x 0,5	10	0,79
552390	2M 2 x 15,5 x 0,8	10	0,51
552460	2M 4 x 15,5 x 0,8	10	1,02
552470	2M 6 x 15,5 x 0,8	10	1,50
552480	2M 10 x 15,5 x 0,8	10	2,20
552490	2M 2 x 20 x 1	5	1,05
552500	2M 3 x 20 x 1	5	1,42
552510	2M 4 x 20 x 1	5	1,78
552520*	2M 5 x 20 x 1	5	2,15
552530*	2M 6 x 20 x 1	5	2,41
552540*	2M 10 x 20 x 1	5	3,99
552550	2M 2 x 24 x 1	5	1,24
552560	2M 3 x 24 x 1	5	1,68
552570	2M 4 x 24 x 1	5	2,12
552580*	2M 5 x 24 x 1	5	2,55
552590*	2M 6 x 24 x 1	5	2,99
552600*	2M 8 x 24 x 1	5	3,87
552610*	2M 10 x 24 x 1	5	4,75
552620	2M 2 x 32 x 1	5	1,62
552630	2M 3 x 32 x 1	5	2,20
552640	2M 4 x 32 x 1	5	2,78
552650*	2M 5 x 32 x 1	5	3,36
552660*	2M 6 x 32 x 1	5	3,94
552670*	2M 8 x 32 x 1	5	5,10
552680*	2M 10 x 32 x 1	5	6,27
552690	2M 2 x 40 x 1	5	1,99
552700	2M 3 x 40 x 1	5	2,72
552710	2M 4 x 40 x 1	5	3,44
552720*	2M 5 x 40 x 1	5	4,16
552730*	2M 6 x 40 x 1	5	4,89
552740*	2M 8 x 40 x 1	5	6,33
552750*	2M 10 x 40 x 1	5	7,78
552760	2M 3 x 50 x 1	5	3,37
552770*	2M 4 x 50 x 1	5	4,27
552780*	2M 5 x 50 x 1	5	5,17
552790*	2M 6 x 50 x 1	2	6,07
552800*	2M 8 x 50 x 1	2	7,87
552810*	2M 10 x 50 x 1	2	9,68
552830*	2M 4 x 63 x 1	2	5,34
552840*	2M 5 x 63 x 1	2	6,48
552850*	2M 6 x 63 x 1	2	7,61
552860*	2M 8 x 63 x 1	2	9,88
552870*	2M 10 x 63 x 1	2	12,14
552880	2M 3 x 80 x 1	2	5,32
552890*	2M 4 x 80 x 1	2	6,75
552900*	2M 5 x 80 x 1	2	8,19
552910*	2M 6 x 80 x 1	2	9,62
552920*	2M 8 x 80 x 1	2	12,49
552930*	2M 10 x 80 x 1	2	15,37
552950*	2M 5 x 100 x 1	2	10,20
552960*	2M 6 x 100 x 1	2	11,99
552970*	2M 8 x 100 x 1	2	15,57
552980*	2M 10 x 100 x 1	2	19,16
552990*	2M 12 x 100 x 1	2	22,74
538650*	2M 10 x 120 x 1	1	22,90

* ERICO patent pending insulation



All ERICO FLEXIBAR cross sections can be bent, folded or twisted with a very small bending radius for shorter and more compact power connections, from 125A up to 4500A applications.

3 Meters Red Copper

Part Number	ERICO FLEXIBAR Description		 Kg
541020	3M 6 x 9 x 0,8	5	1,22
541060	3M 4 x 15,5 x 0,8	5	1,53
541070	3M 6 x 15,5 x 0,8	5	2,25
541090	3M 2 x 20 x 1	5	1,58
541100	3M 3 x 20 x 1	5	2,13
541110	3M 4 x 20 x 1	5	2,67
541150	3M 2 x 24 x 1	5	1,86
541160	3M 3 x 24 x 1	5	2,52
541170	3M 4 x 24 x 1	5	3,18
541180*	3M 5 x 24 x 1	5	3,83
541230	3M 3 x 32 x 1	2	3,30
541240	3M 4 x 32 x 1	2	4,17
541250*	3M 5 x 32 x 1	2	5,04
541260*	3M 6 x 32 x 1	2	5,91
541270*	3M 8 x 32 x 1	2	7,65
541320*	3M 5 x 40 x 1	2	6,24
541380*	3M 5 x 50 x 1	2	7,76


* ERICO patent pending insulation

3 Meters Tinned Copper

Part Number	ERICO FLEXIBAR Description		 Kg
505501	3MTC 2 x 20 x 1	5	1,58
505502	3MTC 3 x 20 x 1	5	2,13
505503	3MTC 4 x 20 x 1	5	2,67
505506	3MTC 2 x 24 x 1	5	1,86
505507	3MTC 3 x 24 x 1	5	2,52
505508	3MTC 4 x 24 x 1	5	3,18
505509*	3MTC 5 x 24 x 1	5	3,83
505510*	3MTC 6 x 24 x 1	5	4,48
505514	3MTC 3 x 32 x 1	2	3,30
505515	3MTC 4 x 32 x 1	2	4,17
505516*	3MTC 5 x 32 x 1	2	5,04
505517*	3MTC 6 x 32 x 1	2	5,91
505518*	3MTC 8 x 32 x 1	2	7,65
505519*	3MTC 10 x 32 x 1	2	9,40
505523*	3MTC 5 x 40 x 1	2	6,24
505526*	3MTC 10 x 40 x 1	2	11,67

* ERICO patent pending insulation

ERICO® FLEXIBAR® SUMMUM - Halogen Free

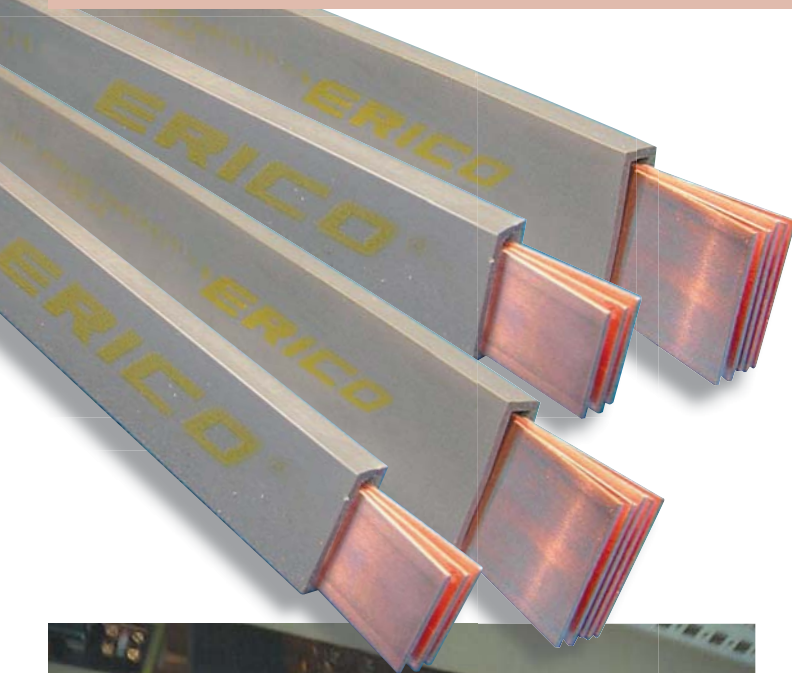

ERICO FLEXIBAR SUMMUM Characteristics

- Halogen free
- Environmental awareness
- High current density
- High ambient temperature
- High flexibility
- High insulation value

IEC 60439.1 &
IEC 61439.1




**On request: Silvered or Tinned
ERICO FLEXIBAR SUMMUM**



ERICO FLEXIBAR SUMMUM

- Conductor in electrolytic copper
 - Laminates thickness 1 mm
- Insulation in silicone compound
 - Working temperature: -50°C up to 280°C (315°C short time)
 - Halogen free
 - Low smoke
 - Very high UV & ozone withstanding
 - Self-extinguishing: UL® 94 VO
 - Elongation: 400% minimum
 - Tear resistance: 20 KN/m minimum
 - Thickness: 2 mm ± 0.2 mm
 - Dielectric strength: 20 KV/mm
 - Maximum continuous voltage: 1000 V AC/ 1500 V DC -
- American Bureau of Shipping (ABS®) - Certificate No. 08-HS365878-1-PDA-DUP - Marine & Offshore Applications

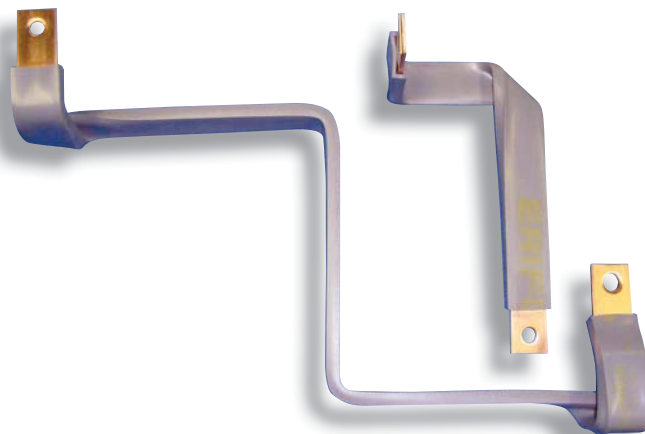

ERICO® FLEXIBAR® SUMMUM - Halogen Free



Some photographs in the ERICO FLEXIBAR SUMMUM section may actually be using ERICO FLEXIBAR

2 Meter Red Copper


Part Number	ERICO FLEXIBAR Description		 Kg	Section mm²	IEC® Ampacity ΔT (°K)					Current Coefficient	
					70	60	50	40	30		
566490	ERICO FLEXIBAR SUMMUM 2 M 2 x 20 x 1	5	1,05	40	326	300	275	246	214	1,72	2,25
566500	ERICO FLEXIBAR SUMMUM 2 M 3 x 20 x 1	5	1,42	60	428	395	360	323	280	1,72	2,25
566510	ERICO FLEXIBAR SUMMUM 2 M 4 x 20 x 1	5	1,78	80	476	440	402	360	312	1,72	2,25
566520	ERICO FLEXIBAR SUMMUM 2 M 5 x 20 x 1	5	2,15	100	498	460	420	376	326	1,72	2,25
566550	ERICO FLEXIBAR SUMMUM 2 M 2 x 24 x 1	5	1,24	48	450	416	380	340	295	1,72	2,25
566560	ERICO FLEXIBAR SUMMUM 2 M 3 x 24 x 1	5	1,68	72	490	453	413	370	320	1,72	2,25
566570	ERICO FLEXIBAR SUMMUM 2 M 4 x 24 x 1	5	2,12	96	550	540	465	416	360	1,72	2,25
566580	ERICO FLEXIBAR SUMMUM 2 M 5 x 24 x 1	5	2,55	120	608	563	514	460	398	1,72	2,25
566590	ERICO FLEXIBAR SUMMUM 2 M 6 x 24 x 1	5	2,99	144	670	620	566	506	438	1,72	2,25
566630	ERICO FLEXIBAR SUMMUM 2 M 3 x 32 x 1	5	2,2	96	570	525	480	430	372	1,72	2,25
566640	ERICO FLEXIBAR SUMMUM 2 M 4 x 32 x 1	5	2,78	128	648	600	548	490	425	1,72	2,25
566650	ERICO FLEXIBAR SUMMUM 2 M 5 x 32 x 1	5	3,36	160	758	702	640	573	496	1,72	2,25
566660	ERICO FLEXIBAR SUMMUM 2 M 6 x 32 x 1	5	3,94	192	846	783	715	640	555	1,72	2,25
566670	ERICO FLEXIBAR SUMMUM 2 M 8 x 32 x 1	5	5,1	256	1018	943	860	770	667	1,72	2,25
566720	ERICO FLEXIBAR SUMMUM 2 M 5 x 40 x 1	5	4,16	200	900	832	760	680	590	1,72	2,25
566730	ERICO FLEXIBAR SUMMUM 2 M 6 x 40 x 1	5	4,89	240	1018	943	860	770	667	1,72	2,25
566750	ERICO FLEXIBAR SUMMUM 2 M 10 x 40 x 1	5	7,78	400	1400	1295	1181	1055	915	1,72	2,25
566780	ERICO FLEXIBAR SUMMUM 2 M 5 x 50 x 1	5	5,17	250	1100	1016	930	830	718	1,72	2,25
566800	ERICO FLEXIBAR SUMMUM 2 M 8 x 50 x 1	2	7,87	400	1393	1290	1175	1050	912	1,72	2,25
566810	ERICO FLEXIBAR SUMMUM 2 M 10 x 50 x 1	2	9,68	500	1650	1525	1395	1245	1080	1,72	2,25

ADMISSIBLE CURRENTS: This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.




ERICO FLEXIBAR Kits

- Application: connections between busbar and fixed switchgear
- Kit is comprised of ERICO FLEXIBAR preformed and punched at the 2 extremities & end covers
- Only 1 kit for 3 configurations
- Intensity range : from 250A to 630A
- RoHS compliant

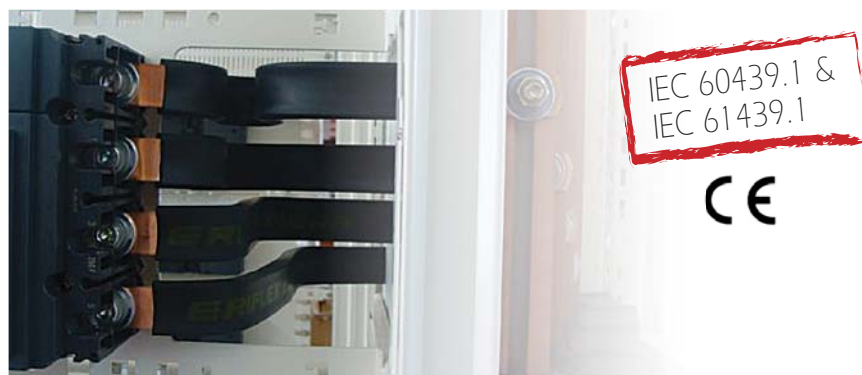

ERICO FLEXIBAR Kit 250A

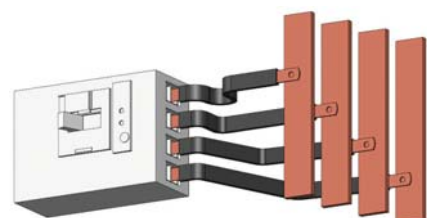


3 Phases

KIT 250A T


3 Phases
+ Neutral

KIT 250A TN

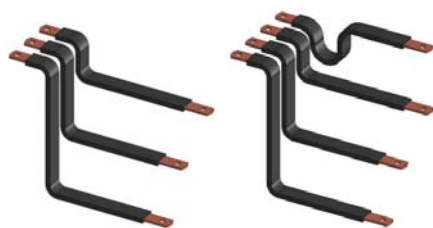

Part No.	Description		kg/lbs
541800	Kit 250A T	1	0,76/1.68
541805	Kit 250A TN	1	0,98/2.16

ERICO FLEXIBAR Kit 630A

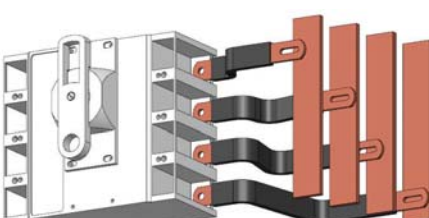

3 Phases

KIT 630A T

3 Phases
+ Neutral

KIT 630A TN




Part No.	Description		kg/lbs
541810	Kit 630A T	1	2,10/4.63
541815	Kit 630A TN	1	3,10/6.83

ERICO FLEXIBAR End Cover 20, 24 & 32

End Cover 20, 24 & 32

- End Cover 20: Accessory for ERICO FLEXIBAR 20 mm, Kit 250A T, Kit 250A TN, IBS 25, IBS 50, IBSB 50 and IBSB 70.
- End Cover 24: Accessory for ERICO FLEXIBAR 24 mm and IBSB 100
- End Cover 32: Accessory for ERICO FLEXIBAR 32 mm, Kit 630A T, Kit 630A TN, IBSB 120, 185 and 240.
- Visual inspection of connection (transparent cover)
- Halogen-free
- Self-extinguishing: UL®94 V-0
- RoHS compliant
- Easy-fitting after bolting

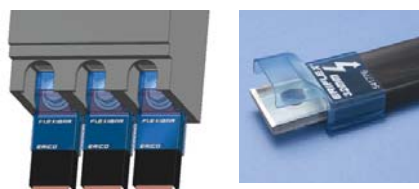

Part No.	Description		kg/lbs
541774	End Cover 20	12	0,19/0.42
541775	End Cover 24	12	0,22/0.48
541776	End Cover 32	12	0,26/0.57



ERICO FLEXIBAR Spacer Clamps


- Easy to install
- Provides support
- Allows for proper cooling



UFS Kit ERICO FLEXIBAR Support

Assembly comprised of a 2 m aluminum section and 24 retaining blocks made of glass-reinforced halogen-free polyamide.


- Possible to make up 3 supports, 650 mm long each for 4 ERICO FLEXIBAR
- Recommended distance between clamps: 400 mm max.

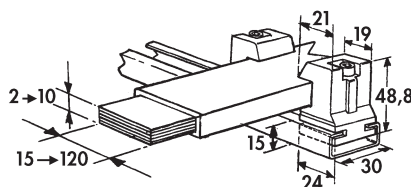

Part No.	Description		Kg
553590	UFS Kit	1	2,3

FS ERICO FLEXIBAR Spacer Clamp

- Helps ensure correct support for ERICO FLEXIBAR, IBSB & IBSBR in parallel, without damage to the insulation.
- Helps ensure correct space for optimum cooling.
- 4 ERICO FLEXIBAR in parallel maximum
- UL 67
- Recommended distance between clamps: 400 mm

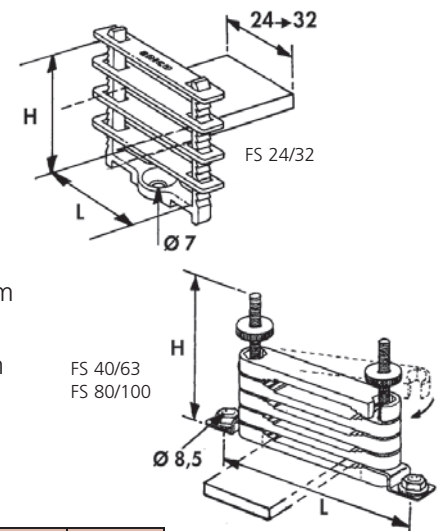


Part No.	Description	Type*	H mm	L mm		Kg
553550	FS 24	=< 24 mm	53	30	25	0,015
553560	FS 32	=< 32 mm	53	38	25	0,018
553570	FS 40-63	40-50 & 63 mm	95	150	10	0,100
553580	FS 80-100	80/100 mm	140	200	10	0,250


* Type of ERICO FLEXIBAR and IBS/IBSB/IBSBR

RFS Reinforced ERICO FLEXIBAR Support

- Allows up to 8 ERICO FLEXIBAR in parallel.
- Easy mounting in the panel. (25 mm pitch)
- Recommended distance between clamps: 400 mm

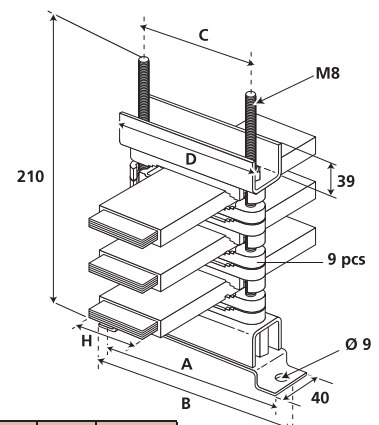

Part No.	Description	A mm	B mm	C mm	D mm	ERICO FLEXIBAR H mm		Kg
553370	RFS 40-63	150	175	90	120	40=>63	1	0,240
553380	RFS 80-100	200	225	140	170	80=>100	1	0,300

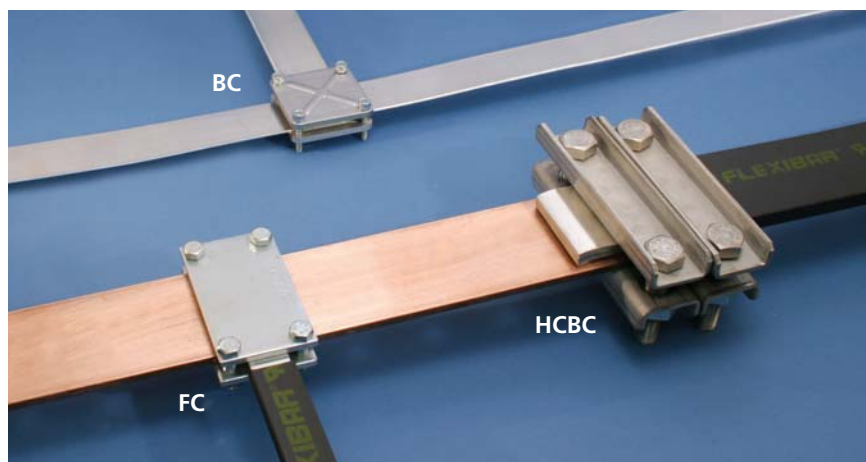


Connecting Clamps

- Allows excellent electrical contact
- Very compact: space saving
- Quick installation
- Ideal for "on site" modifications

FC ERICO FLEXIBAR Clamp


- Clamping capacity: 20 mm
- 2 zinc plated steel plates complete with M8 screws 8.8 class




Part No.	Description	A mm	B mm	C mm	D mm	E mm	F mm	Torque N.m		Kg
553020	FC 50 x 24	50	20-24	60	36	75	52	10	3	0,319
553030	FC 50 x 32	50	32	60	44	75	60	10	3	0,362
553040	FC 50 x 40	50	40	60	52	75	68	10	3	0,412
553050	FC 80 x 24	80	20-24	90	36	105	52	10	3	0,432
553060	FC 80 x 32	80	32	90	44	105	60	10	3	0,492
553070	FC 80 x 50	80	50	90	62	105	78	10	3	0,642
568700	FC 100 x 32	100	32	110	44	125	60	10	3	0,670
568730	FC 120 x 32	120	32	130	44	125	60	10	3	0,760

HCBC High Current Busbar Clamp

- Clamping capacity: 40 mm
- This modular busbar clamp is designed with non-magnetic materials for high current connections between ERICO FLEXIBAR and rigid busbars such as transformer terminals
- Its mechanical design assures rigidity and even contact pressure
- Use 2 clamps to guarantee the contact pressure

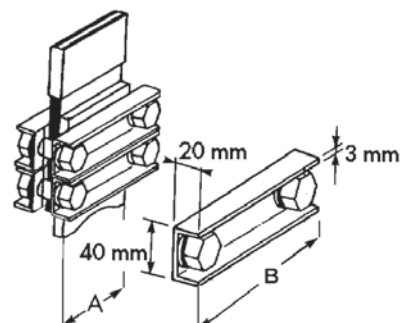

BC Ribbed-Steel Busbar Clamp




- Clamping capacity: 20 mm
- 2 ribbed zinc-plated hardened-steel plates complete with screws
- Maximum clamping capacity is 50 mm using longer screws 8.8 class
- UL® 67 recognized

Part No.	Description	A mm	B mm	C mm	Ø mm	Torque N.m		Kg
553200	BC 30	56	42	30	M6	7	8	0,31
553210	BC 40	66	52	40	M6	7	8	0,37
553220	BC 50	83	64	50	M8	20	8	0,59
553230	BC 63	93	74	63	M8	20	4	0,74
553250	BC 80	118	96	80	M10	40	4	0,118
553260	BC 100	144	118	100	M10	40	4	1,72

Part No.	Description	A mm	B mm	Torque N.m		Kg
553100	HSBC 80	80	140	100	1	0,84
553110	HSBC 100	100	160	100	1	0,92
553120	HSBC 120	120	180	100	1	1,00



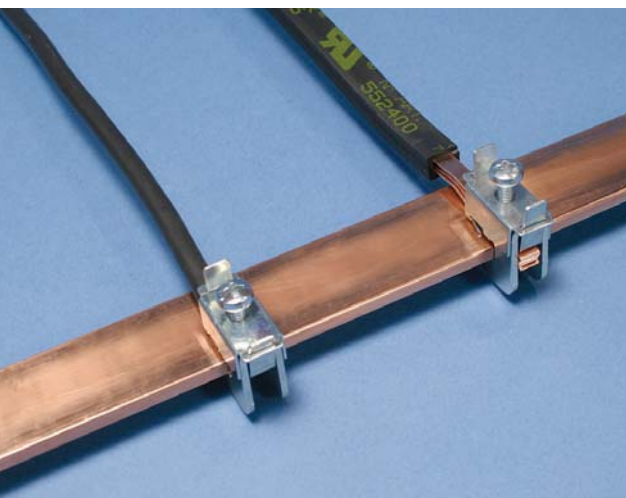

FBC


Connectors for Connecting without Drilling

- Very compact connector for connecting without drilling to a 5 mm or 10 mm thick busbar
- Cables from 1 mm² up to 185 mm² or ERICO FLEXIBAR width 6 mm to 20 mm
- Self-support of connector during mounting procedure
- IEC 60 999

ERICO FLEXIBAR Type


Connectors for busbar thickness 5 mm

Part No.	Description	A mm	B mm	C mm	ERICO FLEXIBAR Type (mm)	Torque N.m	Cable Size mm²		Kg
553405	FBC 5 x 4	23	29	11	-	2	1 - 4	15	0,016
553400	FBC 5 x 6	28	31	14	6	3	2,5 - 16	15	0,028
553410	FBC 5 x 9	36	40	19	9	6-8	16 - 50	15	0,068
553510	FBC 5 x 15,5	44	40	25	15,5	10-12	35 - 70	15	0,110
553520	FBC 5 x 20	48	40	31	20	12-15	70 - 185	15	0,132



Connectors for busbar thickness 10 mm


Part No.	Description	A mm	B mm	C mm	ERICO FLEXIBAR Type (mm)	Torque N.m	Cable Size mm²		Kg
553505	FBC 10 x 4	28	29	12	-	2	1 - 4	15	0,018
553430	FBC 10 x 6	33	31	14	6	3	2,5 - 16	15	0,030
553440	FBC 10 x 9	42	40	19	9	6 - 8	16 - 50	15	0,070
553530	FBC 10 x 15,5	49	40	25	15,5	10 - 12	35 - 70	15	0,112
553540	FBC 10 x 20	54	40	31	20	12 - 15	70 - 185	15	0,138



QCC

Clamps ERICO FLEXIBAR

- For ERICO FLEXIBAR thickness ≤ 5 mm = 1 clamp
- For ERICO FLEXIBAR thickness > 5 mm = 2 clamps

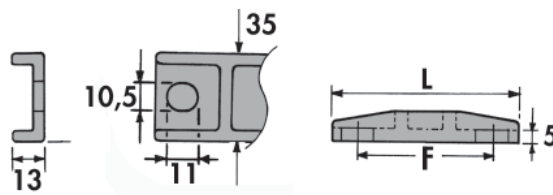

Part No.	Description	ERICO FLEXIBAR width min. mm	ERICO FLEXIBAR width max. mm	L mm	F mm		Kg
561200	QCC 6/13	6	13	48	25	5	0,068
561210	QCC 15,5/32	15,5	32	70	50	5	0,112
561220	QCC 40/63	40	63	95	75	5	0,158



Cont Kit Metal Nuts and Bolts Contact Kit

- For good electrical contact
- 100 nuts - 100 bolts - 200 flat washers
- 200 contact washers (class 8/8 ZN8C protection)

Part No.	Description	Dimensions	Torque N.m		Kg
558310	Cont Kit M6 x 16	HM 6 x 16	13	100	0,012
558340	Cont Kit M8 x 30	HM 8 x 30	30	100	0,028
558370	Cont Kit M10 x 30	HM 10 x 30	60	100	0,052
558410	Cont Kit M10 x 50	HM 10 x 50	60	100	0,062
558440	Cont Kit M12 x 30	HM 12 x 30	110	100	0,081
558460	Cont Kit M12 x 40	HM 12 x 40	110	100	0,091
558480	Cont Kit M12 x 50	HM 12 x 50	110	100	0,097
558880	Cont Kit M12 x 60	HM 12 x 60	110	100	0,116
558490	Cont Kit M12 x 80	HM 12 x 80	110	100	0,150

ERICO® FLEXIBAR® and Busbar Hydraulic Work Center



To discover our full range of tools, please request a copy of our specific "Hydraulic & Manual Tools" brochure, or download it from this QR code.



Hydraulic Busbar & ERICO FLEXIBAR Puncher



Hydraulic Busbar Bender



Hydraulic Busbar Cutter




Shearing Tool Ruler



Hydraulic Pump & Foot Controller




Hydraulic ERICO FLEXIBAR Shearing Tool




Shearing Tool Guide

NEW

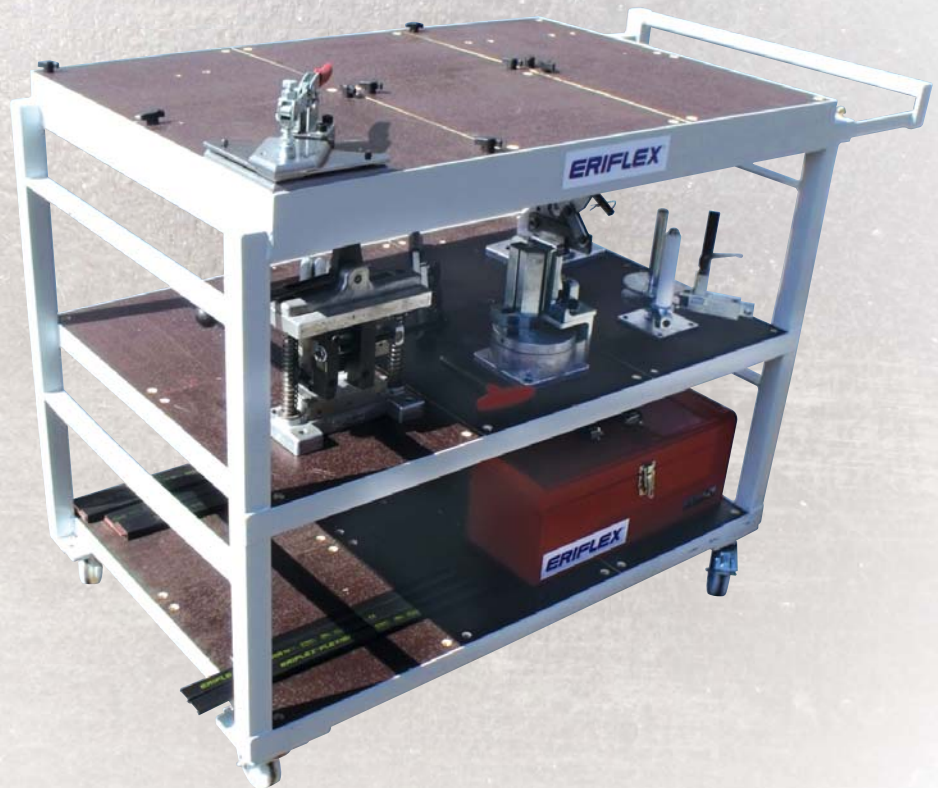


Shearing Tool




Bending Tool



Twisting Tool



ERICO® FLEXIDRILL



Folding Tool



Stripping Tool



Stripping Knife



Bending Tool

Insulated Braided Conductor (IBSB & IBSBR)



Insulated braided conductors suitable for all the main molded case circuit breakers worldwide.




Insulated Braided Conductor Technical Characteristics

- IBSB and IBSBR are specially designed and developed to be suitable and connectable for molded case circuit breaker ranges, including most compact breakers on the market
- IBSB and IBSBR are formed with high-quality electrolytic copper wire (diameter 0,15 mm for maximum flexibility)
- Material savings: Integral palm without lugs or terminals
- Quick and easy to install: Ready to use. No cutting, stripping, crimping or punching. Less labor time for installation
- Weight savings: A flat braid weighs less than a cable (with insulation) and lugs. Offers better copper usage (Skin Effect)
- The insulation is a high-resistance self-extinguishing PVC – 105°C working temperature maximum
- Full application range: 80 A to 630 A (section 25, 50, 70, 100, 120, 185 and 240 mm²), with 230 up to 1030 mm length
- Reliability – No extra contact due to the lugs being crimped at the extremities of the cables. Integral palm without tin addition or crimped lug for an excellent electrical contact.
- Resistant to vibration - ideal alternative to cable

Ideal connection for molded case circuit breakers

The IBSB and IBSBR range can be used as an alternative to cable for all low-voltage applications. It is suitable and connectable for molded case circuit breaker ranges, including most compact breakers on the market. From 80 A up to 630 A circuit breakers, you can directly connect the IBSB/IBSBR on the front access terminals breaker without additional accessories, such as angular connectors, spreaders, ring terminal connectors or extenders. No lugs and no cutting, stripping, or crimping are necessary.

Very simple! Very quick! Ready to use!

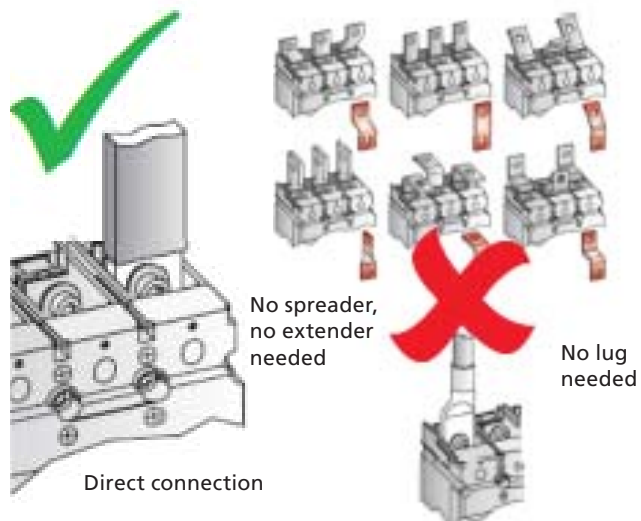

Insulated Braided Conductor (IBSB & IBSBR)



The optimised alternative to cable - Ready to use.

ERICO has developed a unique, state-of-the-art manufacturing line to massivate directly the palms of IBSB and IBSBR braids.

The innovative manufacturing process provides an effective electrical contact, due to the integral palms, without the addition of tin or crimped lugs. This process welds the flexible braid and brings back a solid tinned or red copper block as a palm. Unlike the traditional press-welded palms process, ERICO's process is suitable for red copper, but also for tinned plated copper. The electrical contact between each wire is optimized.


This ERICO process also helps eliminate moisture issues in the palms. By using crimped lugs in a severe environment, moisture can enter in the lug (often by capillarity) and create corrosion between each wire. After several years, the electrical contact between each wire can deteriorate and alter the electrical conductivity of the equipment. The corrosion in the palm is impossible to remove without changing the element.

This process produces RoHS products; no additional substances are added to the tinned-plated wires during the manufacturing process.


Insulated Braided Conductor (IBSB & IBSBR)



Comparison of tensile strength

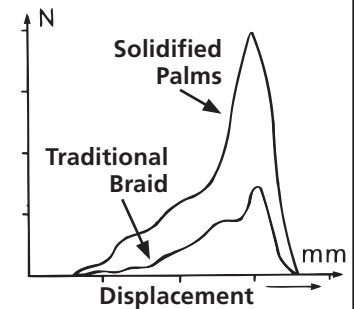

Nominal clamping force



Technical data

- Excellent electrical contact with integral palm construction
- Good tensile strength

Insulation



- High resistance: vinyl compound
- Maximum working temperature: 105° C
- Self-extinguishable: UL 94 V0
- Dielectric strength: 20 kV/mm
- Max. working voltage: 1000 V AC-1500 V DC-IEC & UL 758
- Max. working voltage: 600V AC/DC – UL 67
- Class II Conductors (IEC 61439-1, Chapter 8.4.4 Protection by total insulation)

Braid







- Tinned (IBSB 25-50-70-100) or red (IBSBR 120-185-240) electrolytic copper
- Wire diameter: 0.15 mm for maximum flexibility - According to EN 13602
- Very good resistance to vibration

Certification & Approvals

- IEC 60439.1 & IEC 61439.1
- cRUus per UL67 & CAN/CSA C22.2 No. 29 (File E125470)
- RU per UL758 (E316390)
- CE conformity
- RoHS compliance
- American Bureau of Shipping (ABS®) - Certificate No. 13-HS1070074-PDA - Marine & Offshore Applications

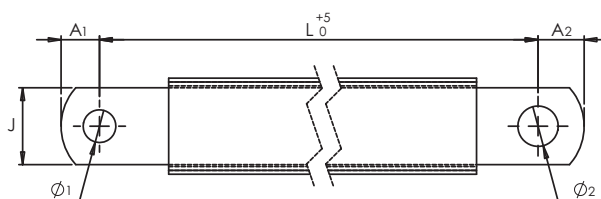

Insulated Braided Conductor (IBSB & IBSBR)

Use with circuit breaker	Part Number	Description	S mm²	L mm	Ø1 mm	Ø2 mm	A1 mm	A2 mm	J mm	M mm	K1 mm	K2 mm		 Kg	
IBSB - Tinned Copper															
IBSB 25 	125/160A	558500	IBSB 25-230-6	25	230	6,5	6,5	7,5	7,5	12	2,8	9	18	10	0,08
		558501	IBSB 25-330-6	25	330	6,5	6,5	7,5	7,5	12	2,8	9	18	10	0,11
		558502	IBSB 25-430-6	25	430	6,5	6,5	7,5	7,5	12	2,8	9	18	10	0,15
		558503	IBSB 25-530-6	25	530	6,5	6,5	7,5	7,5	12	2,8	9	18	10	0,18
		558504	IBSB 25-630-6	25	630	6,5	6,5	7,5	7,5	12	2,8	9	18	10	0,22
		558505	IBSB 25-830-6	25	830	6,5	6,5	7,5	7,5	12	2,8	9	18	10	0,28
		558506	IBSB 25-1030-6	25	1030	6,5	6,5	7,5	7,5	12	2,8	9	18	10	0,35
IBSB 50 	250A	558507	IBSB 50-230-8-10	50	230	8,5	10,5	9	11	20	3	9	27	10	0,15
		558508	IBSB 50-330-8-10	50	330	8,5	10,5	9	11	20	3	9	27	10	0,21
		558509	IBSB 50-430-8-10	50	430	8,5	10,5	9	11	20	3	9	27	10	0,27
		558510	IBSB 50-530-8-10	50	530	8,5	10,5	9	11	20	3	9	27	10	0,33
		558511	IBSB 50-630-8-10	50	630	8,5	10,5	9	11	20	3	9	27	10	0,39
		558512	IBSB 50-830-8-10	50	830	8,5	10,5	9	11	20	3	9	27	10	0,52
		558513	IBSB 50-1030-8-10	50	1030	8,5	10,5	9	11	20	3	9	27	10	0,64
IBSB 70 	300A	558514	IBSB 70-230-8-10	70	230	8,5	10,5	9	11	20	4,3	11	27	10	0,197
		558515	IBSB 70-330-8-10	70	330	8,5	10,5	9	11	20	4,3	11	27	10	0,28
		558516	IBSB 70-430-8-10	70	430	8,5	10,5	9	11	20	4,3	11	27	10	0,362
		558517	IBSB 70-530-8-10	70	530	8,5	10,5	9	11	20	4,3	11	27	10	0,444
		558518	IBSB 70-630-8-10	70	630	8,5	10,5	9	11	20	4,3	11	27	10	0,527
		558519	IBSB 70-830-8-10	70	830	8,5	10,5	9	11	20	4,3	11	27	10	0,692
		558520	IBSB 70-1030-8-10	70	1030	8,5	10,5	9	11	20	4,3	11	27	10	0,857
IBSB 100 	350A	558521	IBSB 100-230-8-10	100	230	8,5	10,5	9	11	24	5	13	31	10	0,27
		558522	IBSB 100-330-8-10	100	330	8,5	10,5	9	11	24	5	13	31	10	0,39
		558523	IBSB 100-430-8-10	100	430	8,5	10,5	9	11	24	5	13	31	10	0,50
		558524	IBSB 100-530-8-10	100	530	8,5	10,5	9	11	24	5	13	31	10	0,62
		558525	IBSB 100-630-8-10	100	630	8,5	10,5	9	11	24	5	13	31	10	0,73
		558526	IBSB 100-830-8-10	100	830	8,5	10,5	9	11	24	5	13	31	10	0,96
		558527	IBSB 100-1030-8-10	100	1030	8,5	10,5	9	11	24	5	13	31	10	1,19
IBSBR - Red Copper															
IBSBR 120 	400A	558528	IBSBR 120-230-10	120	230	10,5	10,5	11	11	32	4,4	12	39	2	0,33
		558529	IBSBR 120-330-10	120	330	10,5	10,5	11	11	32	4,4	12	39	2	0,47
		558530	IBSBR 120-430-10	120	430	10,5	10,5	11	11	32	4,4	12	39	2	0,6
		558531	IBSBR 120-530-10	120	530	10,5	10,5	11	11	32	4,4	12	39	2	0,74
		558532	IBSBR 120-630-10	120	630	10,5	10,5	11	11	32	4,4	12	39	2	0,88
		558533	IBSBR 120-830-10	120	830	10,5	10,5	11	11	32	4,4	12	39	2	1,15
		558534	IBSBR 120-1030-10	120	1030	10,5	10,5	11	11	32	4,4	12	39	2	1,43
IBSBR 185 	500A	558535	IBSBR 185-330-10-12	185	330	10,5	12,5	12	14	32	7,1	16	39	2	0,7
		558536	IBSBR 185-430-10-12	185	430	10,5	12,5	12	14	32	7,1	16	39	2	0,9
		558537	IBSBR 185-530-10-12	185	530	10,5	12,5	12	14	32	7,1	16	39	2	1,1
		558538	IBSBR 185-630-10-12	185	630	10,5	12,5	12	14	32	7,1	16	39	2	1,3
		558539	IBSBR 185-830-10-12	185	830	10,5	12,5	12	14	32	7,1	16	39	2	1,7
		558540	IBSBR 185-1030-10-12	185	1030	10,5	12,5	12	14	32	7,1	16	39	2	2,1
IBSBR 240 	630A	558541	IBSBR 240-330-10-12	240	330	10,5	12,5	12	14	32	9,2	18.5	39	2	0,89
		558542	IBSBR 240-430-10-12	240	430	10,5	12,5	12	14	32	9,2	18.5	39	2	1,14
		558543	IBSBR 240-530-10-12	240	530	10,5	12,5	12	14	32	9,2	18.5	39	2	1,4
		558544	IBSBR 240-630-10-12	240	630	10,5	12,5	12	14	32	9,2	18.5	39	2	1,65
		558545	IBSBR 240-830-10-12	240	830	10,5	12,5	12	14	32	9,2	18.5	39	2	2,16
		558546	IBSBR 240-1030-10-12	240	1030	10,5	12,5	12	14	32	9,2	18.5	39	2	2,67

Insulated Braided Conductor (IBS)



Insulated Braided Conductor Technical Characteristics

- The ideal alternative to cable
- No cutting, no stripping, no crimping
- More flexible connection
- Pre-punched: ready to use
- Quick and easy to install
- Excellent electrical contact
- Tinned electrolytic copper for better corrosion protection
- Very good resistance to vibration
- Volume reduction inside the panel board

Technical Data

- Intensity = 100A up to 1000A
- Excellent electrical contact
- Good tensile strength

Insulation

- High resistance : vinyl compound
- Max. working temperature : 105°C
- Self-extinguishable: UL® 94 VO
- Dielectric strength: 20 kV/mm
- Max. working voltage:
1000 V AC-1500 V DC-IEC & UL 758
- Max. working voltage:
600V AC/DC – UL 67

Braid


- Tinned electrolytic copper for better corrosion protection
- Wire diameter: 0.15 mm for maximum flexibility
- Very good resistance to vibration

Certification & Approval

- IEC 60439.1 & IEC 61439.1
- cRUus per UL67 & CAN/CSA C22.2 No. 29
- CE conformity
- RoHS compliance
- RU per UL758
- American Bureau of Shipping (ABS®)


Dielectric Test

- 3500 V_{AC}, 1 minute according to the IEC 60439.1 standard (rated insulation voltage U_i 1000 V_{AC})
- 6000 V_{AC}, 1 minute with 6 mA creepage current set up

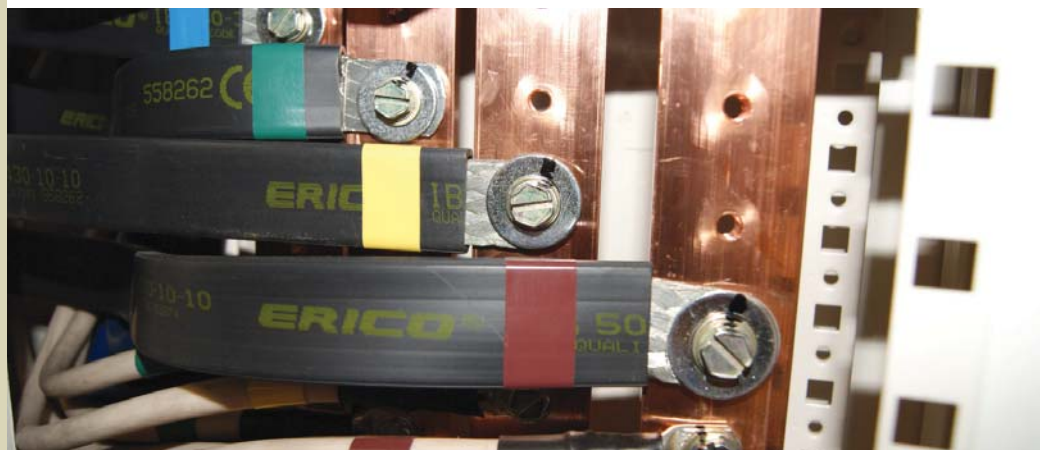

Insulated Braided Conductor (IBS)


IBS 25
IBS 50

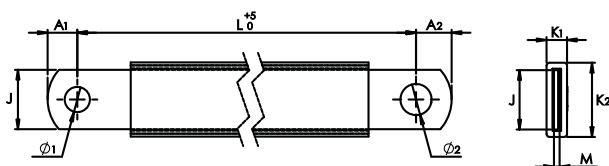

	Part No.	IBS 25	S mm ²	L mm	Ø1 mm	Ø2 mm	A1 mm	A2 mm	J mm	M mm	K1 mm	K2 mm		Kg
160 A	558240	IBS 25-230-8-10	25	230	8,5	10,5	10	12	20	1,9	6	25	10	0,095
	558241	IBS 25-330-8-10	25	330	8,5	10,5	10	12	20	1,9	6	25	10	0,14
	558242	IBS 25-430-8-10	25	430	8,5	10,5	10	12	20	1,9	6	25	10	0,17
	558243	IBS 25-530-8-10	25	530	8,5	10,5	10	12	20	1,9	6	25	10	0,21
	558244	IBS 25-630-8-10	25	630	8,5	10,5	10	12	20	1,9	6	25	10	0,25
	558249	IBS 25-830-8-10	25	830	8,5	10,5	10	12	20	1,9	6	25	10	0,33
	558250	IBS 25-1030-8-10	25	1030	8,5	10,5	10	12	20	1,9	6	25	10	0,41

	Part No.	IBS 50	S mm ²	L mm	Ø1 mm	Ø2 mm	A1 mm	A2 mm	J mm	M mm	K1 mm	K2 mm		Kg
250 A	558260	IBS 50-230-10	50	230	10,5	10,5	12	12	20	3,8	7,5	25	10	0,16
	558261	IBS 50-330-10	50	330	10,5	10,5	12	12	20	3,8	7,5	25	10	0,22
	558262	IBS 50-430-10	50	430	10,5	10,5	12	12	20	3,8	7,5	25	10	0,29
	558263	IBS 50-530-10	50	530	10,5	10,5	12	12	20	3,8	7,5	25	10	0,35
	558264	IBS 50-630-10	50	630	10,5	10,5	12	12	20	3,8	7,5	25	10	0,41
	558255	IBS 50-830-10	50	830	10,5	10,5	12	12	20	3,8	7,5	25	10	0,53
	558256	IBS 50-1030-10	50	1030	10,5	10,5	12	12	20	3,8	7,5	25	10	0,65

IBS 120
IBS 185
IBS 240

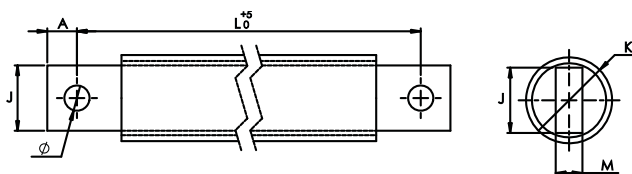


	Part No.	IBS 120	S mm ²	L mm	Ø mm	A mm	J mm	M mm	K mm		Kg
400 A	558270	IBS 120-330-10	120	330	10,5	12	24	10	27	2	0,51
	558271	IBS 120-430-10	120	430	10,5	12	24	10	27	2	0,67
	558272	IBS 120-530-10	120	530	10,5	12	24	10	27	2	0,82
	558273	IBS 120-630-10	120	630	10,5	12	24	10	27	2	0,98
	558274	IBS 120-830-10	120	830	10,5	12	24	10	27	2	1,29
	558276	IBS 120-1030-10	120	1030	10,5	12	24	10	27	2	1,6

	Part No.	IBS 185	S mm ²	L mm	Ø mm	A mm	J mm	M mm	K mm		Kg
500 A	558290	IBS 185-330-10	185	330	10,5	12	24	15	31	2	0,82
	558291	IBS 185-430-10	185	430	10,5	12	24	15	31	2	1,07
	558292	IBS 185-530-10	185	530	10,5	12	24	15	31	2	1,26
	558293	IBS 185-630-10	185	630	10,5	12	24	15	31	2	1,48
	558294	IBS 185-830-10	185	830	10,5	12	24	15	31	2	1,9
	558295	IBS 185-1030-10	185	1030	10,5	12	24	15	31	2	2,3

	Part No.	IBS 240	S mm ²	L mm	Ø mm	A mm	J mm	M mm	K mm		Kg
630 A	558280	IBS 240-330-12	240	330	12,5	13	32	15	36	2	1,03
	558281	IBS 240-430-12	240	430	12,5	13	32	15	36	2	1,34
	558282	IBS 240-530-12	240	530	12,5	13	32	15	36	2	1,65
	558283	IBS 240-630-12	240	630	12,5	13	32	15	36	2	1,96
	558284	IBS 240-830-12	240	830	12,5	13	32	15	36	2	2,58
	558285	IBS 240-1030-12	240	1030	12,5	13	32	15	36	2	3,2

Insulated Braided Conductor (IBS, IBSB & IBSBR)

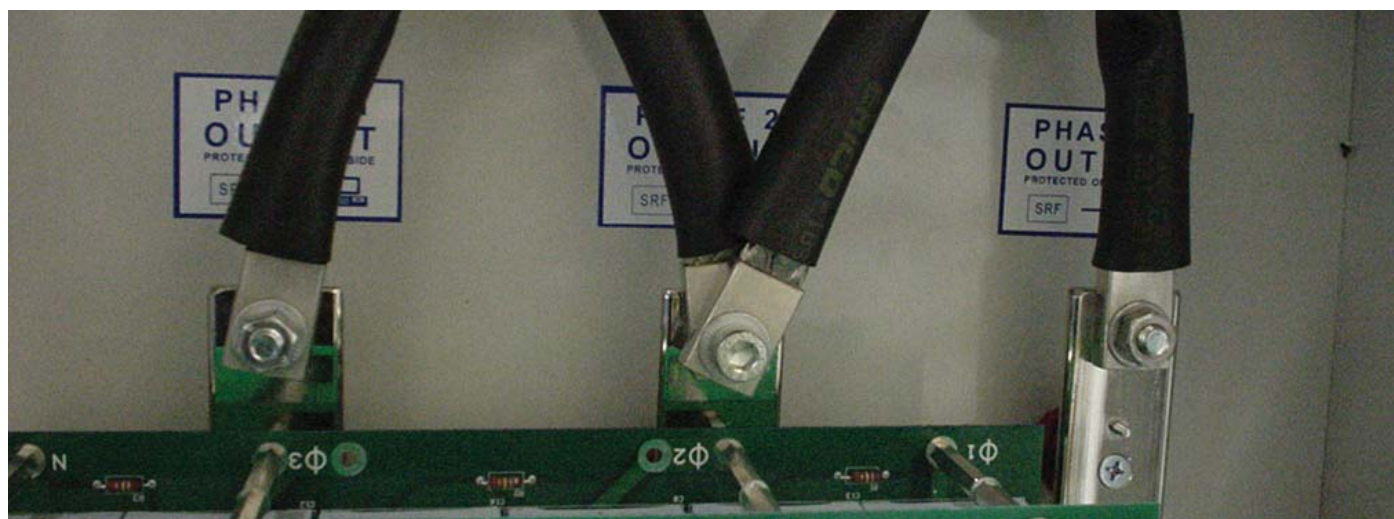


Insulated Braided conductor type	Section mm ²	ΔT (K)							Current Coefficient	
		30	40	45	50	55	60	70		
IBS 25	25	137	158	167	177	185	193	209	1,6	2
IBSB 25	25	116	134	142	150	157	164	177	1,6	2
IBS 50	50	213	246	260	274	288	301	325	1,6	2
IBSB 50	50	213	246	260	274	288	301	325	1,6	2
IBSB 70	70	226	261	277	291	306	319	345	1,6	2
IBSB 100	100	298	344	365	385	404	422	456	1,6	2
IBS 120	120	325	376	398	420	441	460	497	1,6	
IBSBR 120	120	363	419	444	468	491	513	554	1,6	2
IBS 185	185	407	470	499	526	552	576	622	1,6	
IBSBR 185	185	416	480	509	537	563	588	635	1,6	2
IBS 240	240	488	563	598	630	661	690	745	1,6	
IBSBR 240	240	556	642	681	718	753	786	849	1,6	2

ADMISSIBLE CURRENTS: This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.



Selection of insulated braided conductor IBS, IBSB & IBSBR according to the internal temperature of the panel.

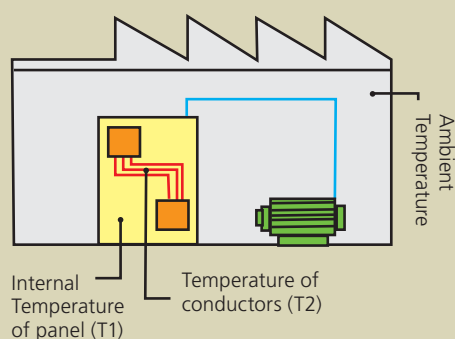

Temperature rise of conductor = $T_2 - T_1 = \Delta T$ (K)

Ex.: For a current of 630A, with:

$T_1 = 40^\circ\text{C} - T_2 = 90^\circ\text{C}$

1) $\Delta T = 90 - 40 = 50\text{K}$

2) In the 50°K column, find the closest current value to 630A.

K = Kelvin degree (temperature calculated, but not measurable.)

Insulated braided conductor in parallel


When using 2 or 3 insulated braided conductors in parallel for the same phase, use the current coefficient:

Ex.: IBSB 100 - $\Delta T^\circ = 50\text{K}$: 385 A


2 braids in parallel > $385 \text{ A} \times 1,6 = 616 \text{ A}$

3 braids in parallel > $385 \text{ A} \times 2 = 770 \text{ A}$

Insulated Braided Conductor (IBS, IBSB & IBSBR)

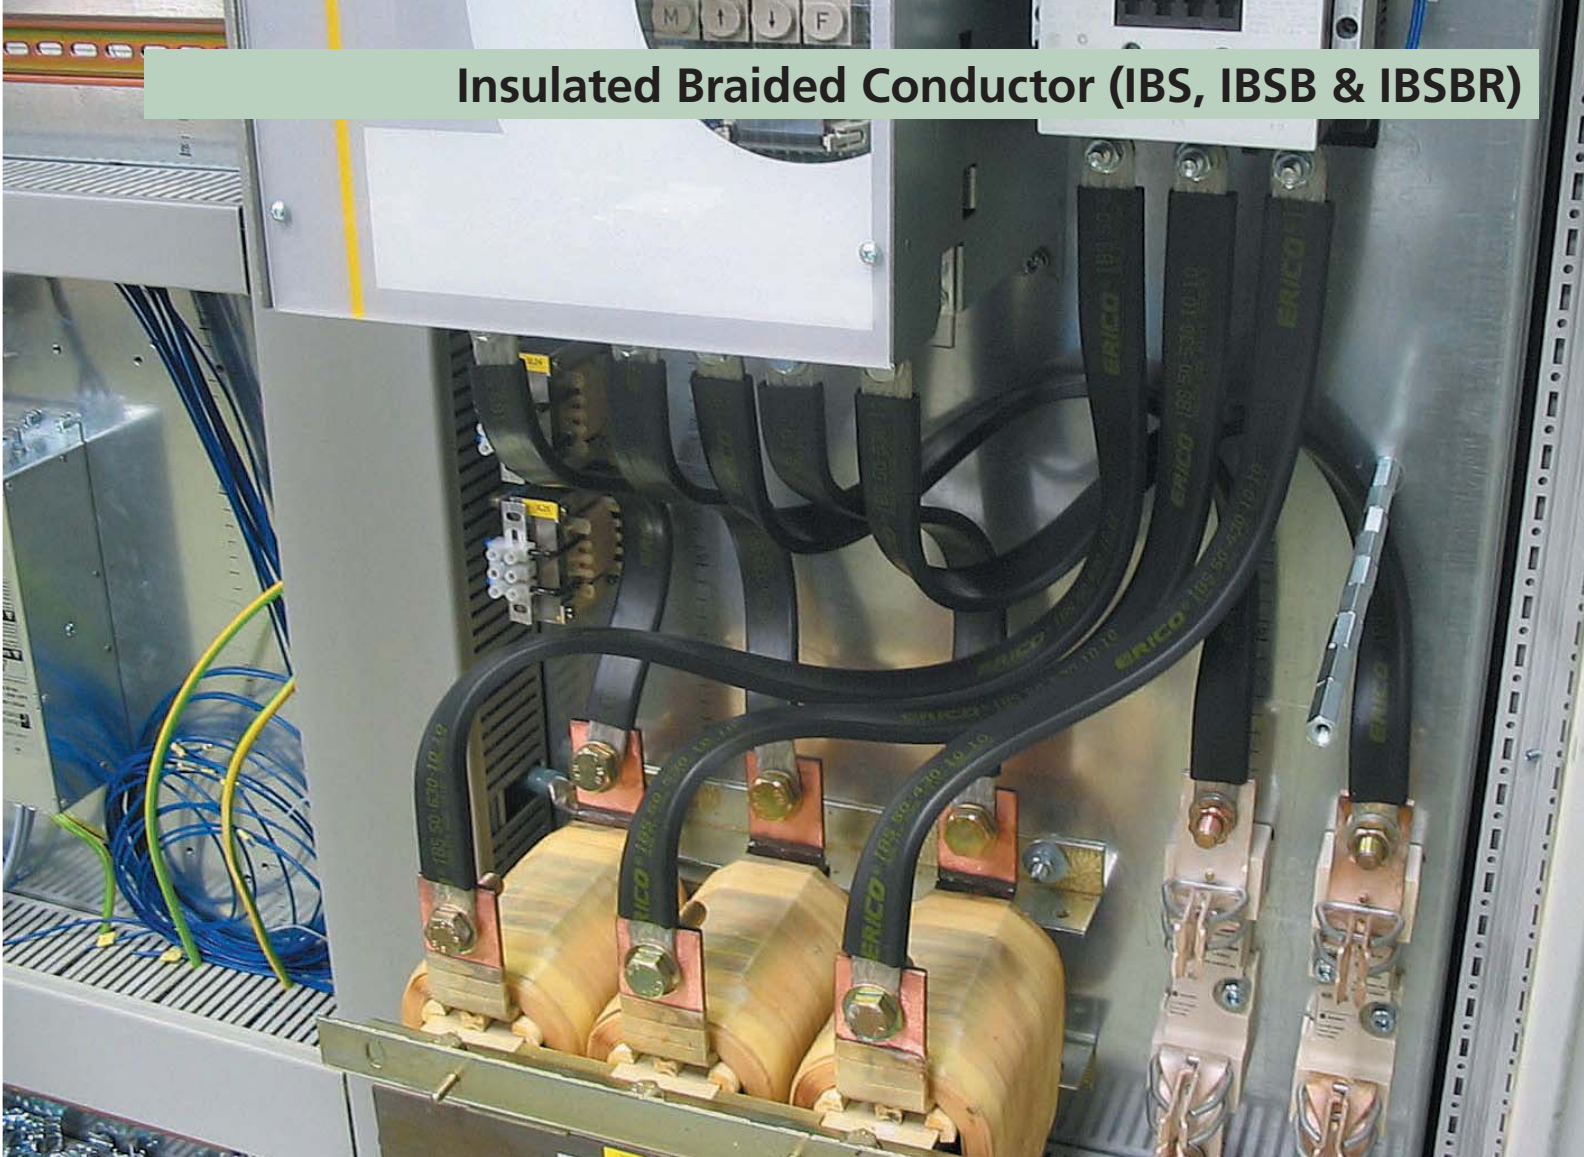


Assembly Instructions

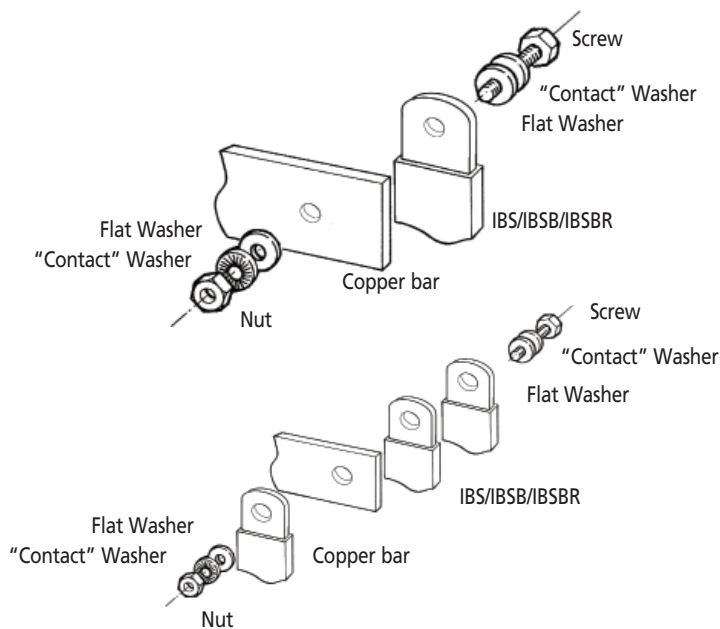

Space between 2 or 3 insulated braided conductors in parallel, for cooling.

A minimum air gap is required. Use FS type spacer clamp.



Designation	Part No.	For insulated braided conductor type
FS 24	553550	IBS 25 / 50
		IBSB 25 / 50 / 70 / 100
FS 32	553560	IBSBR 120 / 185 / 240

Earth/Ground Copper Braids (MBJ & BJ)



Innovative, state-of-the-art manufacturing process.

ERICO manufacturing directly massivates the palms of the MBJ tinned-plated braids. This manufacturing process provides an effective electrical contact, due to the integral palms, without the addition of tin or crimped lugs.

This process welds the flexible braid and brings back a solid tinned or red copper block as a palm. Unlike the traditional press-welded palms process, ERICO's process is suitable for red copper, but also for tin plated copper. The electrical contact between each wire is optimized.

This ERICO process also helps eliminate moisture issues in the palms. By using crimped lugs in a severe environment, moisture can enter in the lug (often by capillarity) and create corrosion between each wire. After several years, the electrical contact between each wire can deteriorate and alter the electrical conductivity of the equipment. The corrosion in the palm is impossible to remove without changing the element.

This process produces RoHS products; no additional substances are added to the tinned-plated wires during the manufacturing process.

Tinned Copper Earth/Ground Braids Technical Characteristics

With integral palm

- A complete range of earth/ground flexible connections from 6 to 100 mm² section and from 100 to 500 mm length
- Good resistance to vibration and fatigue
- Reliable: No extra contact due to the lugs crimped at the ends of the cable
- Weight savings: A flat braid weighs less than a cable (with insulation) and lugs and offers better copper usage (Skin Effect)
- Integral palm, without tin or crimped lugs for superior electrical contact and tensile strength resistance
- Quick and easy to install: Ready to use. No cutting, stripping, crimping or punching. Less labor time for installation
- Material savings: No lugs or terminals
- Recommended by the EMC/EMI directives and less impedance than cables



BJ

Round braids with crimped lugs





Part No.	Description	Section mm	L mm	Ø D mm	Intensity A		 Kg
556900	BJ 6-150 S	6	150	6,5	45	10	0,010
556910	BJ 6-200 S	6	200	6,5	45	10	0,015
556920	BJ 10-300 S	10	300	6,5	75	10	0,033



Earth/Ground Copper Braids (MBJ & BJ)

Part Number	Description	Intensity A	Thickness mm	Section mm ²	L mm	Ø mm	J mm	T mm		 Kg
556600	MBJ 6-150-6	40	1,1	6	150	6,5	11	18	10	0,01
563410	MBJ 6-200-6	40	1,1	6	200	6,5	11	18	10	0,0167
556930	MBJ 10-200-6	75	1,1	10	200	6,5	11	18	10	0,022
556610	MBJ 10-300-6	75	1,1	10	300	6,5	11	18	10	0,033
563540	MBJ 16-100-6	120	1,5	16	100	6,5	15	20	10	0,018
556620	MBJ 16-100-8	120	1,5	16	100	8,5	15	20	10	0,018
563550	MBJ 16-150-6	120	1,5	16	150	6,5	15	20	10	0,035
556630	MBJ 16-150-8	120	1,5	16	150	8,5	15	20	10	0,035
563300	MBJ 16-200-6	120	1,5	16	200	6,5	15	20	10	0,033
556640	MBJ 16-200-8	120	1,5	16	200	8,5	15	20	10	0,033
556650	MBJ 16-250-8	120	1,5	16	250	8,5	15	20	10	0,04
563320	MBJ 16-300-6	120	1,5	16	300	6,5	15	20	10	0,05
556660	MBJ 16-300-8	120	1,5	16	300	8,5	15	20	10	0,05
556940	MBJ 16-500-8	120	1,5	16	500	8,5	15	20	10	0,082
556670	MBJ 25-100-10	150	1,5	25	100	10,5	22	28	10	0,027
556680	MBJ 25-150-10	150	1,5	25	150	10,5	22	28	10	0,039
563340	MBJ 25-200-6	150	1,5	25	200	6,5	22	28	10	0,052
556690	MBJ 25-200-10	150	1,5	25	200	10,5	22	28	10	0,052
563430	MBJ 25-200-12	150	1,5	25	200	12,5	22	28	10	0,052
556700	MBJ 25-250-10	150	1,5	25	250	10,5	22	28	10	0,064
556710	MBJ 25-300-10	150	1,5	25	300	10,5	22	28	10	0,077
556950	MBJ 25-500-10	150	1,5	25	500	10,5	22	28	10	0,13
556720	MBJ 30-100-10	180	2	30	100	10,5	22	28	10	0,032
556730	MBJ 30-150-10	180	2	30	150	10,5	22	28	10	0,047
556740	MBJ 30-200-10	180	2	30	200	10,5	22	28	10	0,062
556750	MBJ 30-250-10	180	2	30	250	10,5	22	28	10	0,075
556760	MBJ 30-300-10	180	2	30	300	10,5	22	28	10	0,092
556960	MBJ 30-500-10	180	2	30	500	10,5	22	28	10	0,155
556770	MBJ 35-100-10	197	2,1	35	100	10,5	22	28	10	0,037
556780	MBJ 35-150-10	197	2,1	35	150	10,5	22	28	10	0,054
556790	MBJ 35-200-10	197	2,1	35	200	10,5	22	28	10	0,072
556800	MBJ 35-250-10	197	2,1	35	250	10,5	22	28	10	0,089
565000	MBJ 35-250-25	197	1,5	35	250	25,5	40	45	10	0,089
556810	MBJ 35-300-10	197	2,1	35	300	10,5	22	28	10	0,11
556970	MBJ 35-500-10	197	2,1	35	500	10,5	22	28	10	0,18
556820	MBJ 50-100-10	250	2,5	50	100	10,5	28	33	10	0,052
556830	MBJ 50-150-10	250	2,5	50	150	10,5	28	33	10	0,077
563350	MBJ 50-200-6	250	2,5	50	200	6,5	28	33	10	0,12
556840	MBJ 50-200-10	250	2,5	50	200	10,5	28	33	10	0,12
563440	MBJ 50-200-12	250	2,5	50	200	12,5	28	33	10	0,12
563360	MBJ 50-200-16	250	2,5	50	200	16,5	28	33	10	0,11
563370	MBJ 50-200-18	250	2,5	50	200	18,5	28	33	10	0,11
556850	MBJ 50-250-10	250	2,5	50	250	10,5	28	33	10	0,127
563380	MBJ 50-300-6	250	2,5	50	300	6,5	28	33	10	0,15
556860	MBJ 50-300-10	250	2,5	50	300	10,5	28	33	10	0,153
563390	MBJ 50-300-16	250	2,5	50	300	16,5	28	33	10	0,15
563400	MBJ 50-300-18	250	2,5	50	300	18,5	28	33	10	0,14
556980	MBJ 50-500-10	250	2,5	50	500	10,5	28	33	10	0,255
563560	MBJ 50-500-12	250	2,5	50	500	12,5	28	33	10	0,255
563450	MBJ 70-300-6	290	3,4	70	300	6,5	28	33	10	0,21
563460	MBJ 70-300-10	290	3,4	70	300	10,5	28	33	10	0,21
563420	MBJ 70-300-12	290	3,4	70	300	12,5	28	33	10	0,21
563470	MBJ 70-300-16	290	3,4	70	300	16,5	28	33	10	0,2
563480	MBJ 70-300-22	290	2,8	70	300	22,5	40	45	10	0,2
563490	MBJ 70-500-10	290	3,4	70	500	10,5	28	33	10	0,34
563500	MBJ 100-250-16	349	4	100	250	16,5	50	55	10	0,254
563510	MBJ 100-250-30	349	4	100	250	30,5	50	55	10	0,254
563520	MBJ 100-500-16	349	4	100	500	16,5	50	55	10	0,508
563530	MBJ 100-500-30	349	4	100	500	30,5	50	55	10	0,508

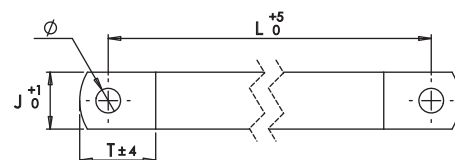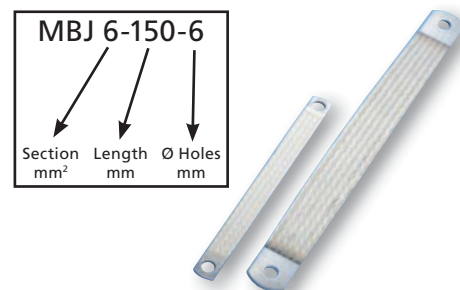


Technical Data

- Recommended by EMC/EMI directives
- Flat tinned copper braids
- Electrolytic copper Cu-ETP according to standard EN13602
- Copper purity of minimum 99,9%
- Maximum resistivity of 0,017241 mm²/m at 20°C
- Standard wire diameter; 0,15 mm
- Bends very close to the contact area
- Working temperature up to 105°C

Certification & Approvals

- UL® Listed (UL467) except BJ
- GOST certificates
- RoHS 2002/95/EC Compliant
- IEC 60439.1 & 61439.1

Comparison of tensile strength



Nominal clamping force



Earth/Ground Stainless Steel Braids (CPI)



Ready-to-use stainless steel braids for multiple applications


Stainless Steel Braids Technical Characteristics

- 316L stainless steel braid ready to use
- Full application range: 16 to 70 mm² section with 150 to 1100 mm length
- High-quality 316L stainless steel: superior abrasion, corrosion, chemical, and UV resistance for outdoor applications
- Good resistance to vibration and fatigue
- Time savings: Quick and easy to install. Ready to use. No additional cutting, stripping, crimping and punching needed. Less labor time for installation
- Material savings: No additional lugs or terminals needed
- Durable in outdoor, salt and corrosive environments
- Non-magnetic material
- Long maintenance cycle


ERICO developed and manufactures a range of earth/ground stainless steel braids. These high-quality 316L stainless steel braids can be installed in extremely corrosive environments, like offshore applications or coastal applications. The CPI braid is ideal for applications using stainless steel pipe or tanks, like the food and beverage industry, building industry, transportation, oil and chemical industry.

ERICO offers 316L stainless steel, one of the highest resistant stainless steel options on the market. ERICO has mastered the process of manufacturing stainless steel for braiding, crimping, cutting or punching and offers a full range of ready-to-use stainless steel braids.

Where stainless braids can be used:


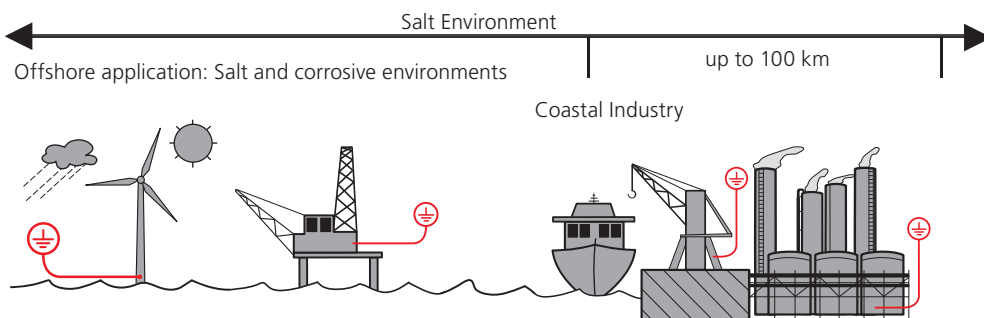


Outdoor application: Oil & chemical industry, food & beverage industry, civil construction, urban projects and transportation

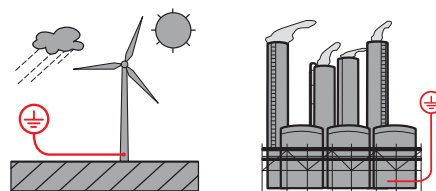

Earth/Ground Stainless Steel Braids (CPI)

- Superior abrasion, corrosion, chemical and UV resistance make it ideal for outdoor applications
- Great for expansion joints where constant movement requires a flexible and indestructible covering
- Won't rust or discolor, so the appearance will never fade or change
- No additional cutting, stripping, or crimping needed
- More flexible connection
- Pre-punched: ready to use
- Quick and easy to install
- Excellent electrical contact
- Very good resistance to vibration and fatigue
- Recommended by the EMC directives
- Reduced maintenance

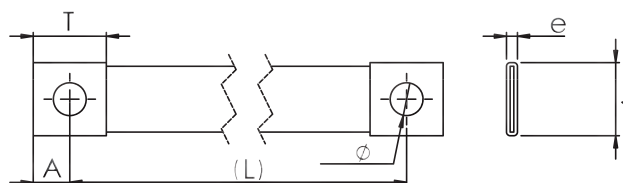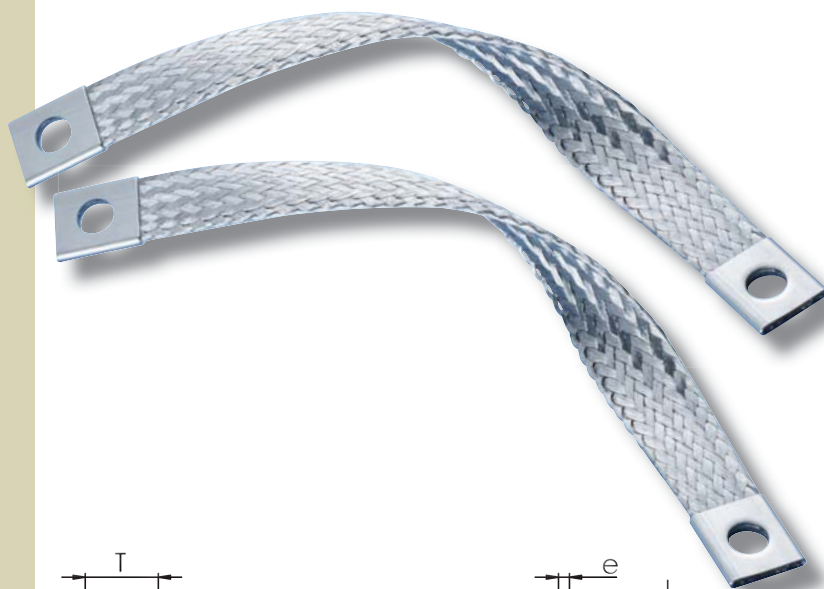

Part Number	Description	Section mm ²	L mm	Ø mm	J mm	A mm	T mm	e mm		 Kg
554277	CPI 16-150-8	16	150	8,5	17,5	10	20	3	10	0,031
554278	CPI 16-200-8	16	200	8,5	17,5	10	20	3	10	0,037
554279	CPI 16-250-8	16	250	8,5	17,5	10	20	3	10	0,043
554280	CPI 16-300-8	16	300	8,5	17,5	10	20	3	10	0,050
554282	CPI 16-400-8	16	400	8,5	17,5	10	20	3	10	0,062
554286	CPI 16-600-8	16	600	8,5	17,5	10	20	3	10	0,087
554299	CPI 25-150-10	25	150	10,5	26,5	15	30	3,5	10	0,058
554300	CPI 25-200-10	25	200	10,5	26,5	15	30	3,5	10	0,068
554301	CPI 25-250-10	25	250	10,5	26,5	15	30	3,5	10	0,078
554302	CPI 25-300-10	25	300	10,5	26,5	15	30	3,5	10	0,088
554304	CPI 25-400-10	25	400	10,5	26,5	15	30	3,5	10	0,108
554308	CPI 25-600-10	25	600	10,5	26,5	15	30	3,5	10	0,147
554321	CPI 35-150-12	35	150	13	26,5	15	30	4	10	0,071
554322	CPI 35-200-12	35	200	13	26,5	15	30	4	10	0,085
554323	CPI 35-250-12	35	250	13	26,5	15	30	4	10	0,099
554324	CPI 35-300-12	35	300	13	26,5	15	30	4	10	0,112
554326	CPI 35-400-12	35	400	13	26,5	15	30	4	10	0,140
554330	CPI 35-600-12	35	600	13	26,5	15	30	4	10	0,195
554343	CPI 50-150-12	50	150	13	30	15	30	5	10	0,111
554344	CPI 50-200-12	50	200	13	30	15	30	5	10	0,130
554345	CPI 50-250-12	50	250	13	30	15	30	5	10	0,150
554346	CPI 50-300-12	50	300	13	30	15	30	5	10	0,170
554348	CPI 50-400-12	50	400	13	30	15	30	5	10	0,209
554352	CPI 50-600-12	50	600	13	30	15	30	5	10	0,288
554365	CPI 70-150-12	70	150	13	30	15	30	5,8	10	0,139
554366	CPI 70-200-12	70	200	13	30	15	30	5,8	10	0,167
554367	CPI 70-250-12	70	250	13	30	15	30	5,8	10	0,194
554368	CPI 70-300-12	70	300	13	30	15	30	5,8	10	0,222
554370	CPI 70-400-12	70	400	13	30	15	30	5,8	10	0,277
554374	CPI 70-600-12	70	600	13	30	15	30	5,8	10	0,388
554378	CPI 70-800-12	70	800	13	30	15	30	5,8	10	0,498
554384	CPI 70-1100-12	70	1100	13	30	15	30	5,8	10	0,664

Technical Data

- Excellent electrical contact
- Good tensile strength
- Working temperature up to 105°C


Braid

- 316L Stainless steel
- Wire diameter: 0,25 mm for maximum flexibility
- Very good resistance to vibration

Certification & Approvals

- UL® Listed UL467 - grounding and bonding equipment for US and Canada
- RoHS Compliant
- IEC 60439.1 & 61439.1
- ABS American Bureau of Shipping Certificate No. 13-HS1018106-1-PDA-DUP


Power Shunt (PBC, PBCR & PPS)

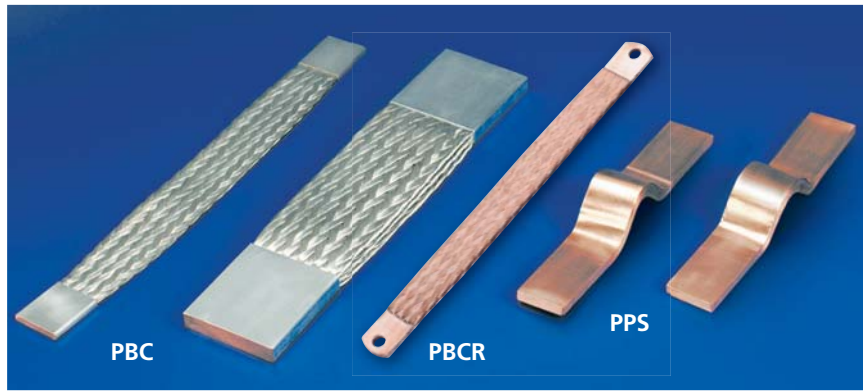

- High flexibility
- Reduce vibrations
- Ideal for transformer-busduct link
- Intensity: Up to 4600 A

PBCR Braided Power Shunts


- Drilled palms (ready to use)
- Weight savings - integral palm without tin addition or crimped lug
- Red electrolytic copper strand
Ø 0,15 mm
- Extra flexible power connection and good resistance to vibration
- UL® Listed to UL 467 up to 100 mm² for grounding and bonding application
- UL® Recognized to UL 67

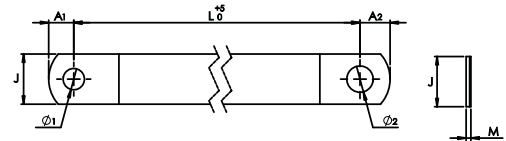

Part No.	Description	Section mm²	Intensity (ΔT 30K)		Intensity (ΔT 50K)		L mm	Ø1 mm	Ø2 mm	A1 mm	A2 mm	J mm	M mm	Kg
564960	PBCR 70-230-8-10	70	226	362	291	466	230	8,5	10,5	9	11	20	4,3	2
564961	PBCR 70-330-8-10	70	226	362	291	466	330	8,5	10,5	9	11	20	4,3	2
564962	PBCR 70-430-8-10	70	226	362	291	466	430	8,5	10,5	9	11	20	4,3	2
564963	PBCR 100-230-8-10	100	298	477	385	616	230	8,5	10,5	9	11	24	5	2
564964	PBCR 100-330-8-10	100	298	477	385	616	330	8,5	10,5	9	11	24	5	2
564965	PBCR 100-430-8-10	100	298	477	385	616	430	8,5	10,5	9	11	24	5	2
564966	PBCR 120-230-10	120	363	581	468	749	230	10,5	10,5	11	11	32	4,4	2
564967	PBCR 120-330-10	120	363	581	468	749	330	10,5	10,5	11	11	32	4,4	2
564968	PBCR 120-430-10	120	363	581	468	749	430	10,5	10,5	11	11	32	4,4	2
564969	PBCR 185-330-10-12	185	416	666	537	859	330	10,5	12,5	12	14	32	7,1	2
564970	PBCR 185-430-10-12	185	416	666	537	859	430	10,5	12,5	12	14	32	7,1	2
564971	PBCR 240-330-10-12	240	556	890	718	1149	330	10,5	12,5	12	14	32	9,2	2
564972	PBCR 240-430-10-12	240	556	890	718	1149	430	10,5	12,5	12	14	32	9,2	2

PBC Braided Power Shunts


- Undrilled palms to customer's specific designs, fitted by power press
- Extra-flexible power connections (expansion rings, busbar...)
- Tinned electrolytic copper strand Ø 0,15 mm
- When used in parallel, the 2 shunts must be spaced with a minimum distance equal to the thickness of the shunt to allow air cooling

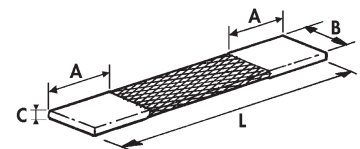

Part No.	Description	Section mm²	Intensity (ΔT 30K)		Intensity (ΔT 50K)		A mm	B mm	C mm	L mm	Kg
564000	PBC 100 x 250	100	349	600	462	795	35	40	7,0	250	0,38
564050	PBC 100 x 500	100	349	600	462	795	35	40	7,0	500	0,63
564010	PBC 120 x 250	120	385	670	511	877	35	40	7,5	250	0,42
564100	PBC 150 x 250	150	440	757	583	1003	55	50	8,0	250	0,63
564150	PBC 150 x 500	150	440	757	583	1003	55	50	8,0	500	0,90
564200	PBC 200 x 250	200	550	946	729	1253	55	50	9,0	250	0,76
564250	PBC 200 x 500	200	550	946	729	1253	55	50	9,0	500	1,20
564300	PBC 250 x 300	250	651	1120	863	1484	85	50	10,5	300	1,03
564400	PBC 300 x 400	300	716	1180	948	1565	85	60	11,0	400	1,53
564500	PBC 400 x 400	400	853	1360	1131	1808	85	80	11,0	400	2,20
564600	PBC 500 x 400	500	917	1561	1216	1944	105	100	11,0	400	2,64
564700	PBC 600 x 450	600	1101	1762	1459	2334	105	100	13,0	450	3,40
564800	PBC 800 x 450	800	1376	2202	1823	2917	105	100	14,0	450	4,26
564900	PBC 1000 x 450	1000	1651	2642	2188	3500	105	100	16,0	450	5,47
564030	PBC 1200 x 500	1200	1982	3170	2626	4208	125	120	17,5	500	7,16




Power Shunt (PBC, PBCR & PPS)

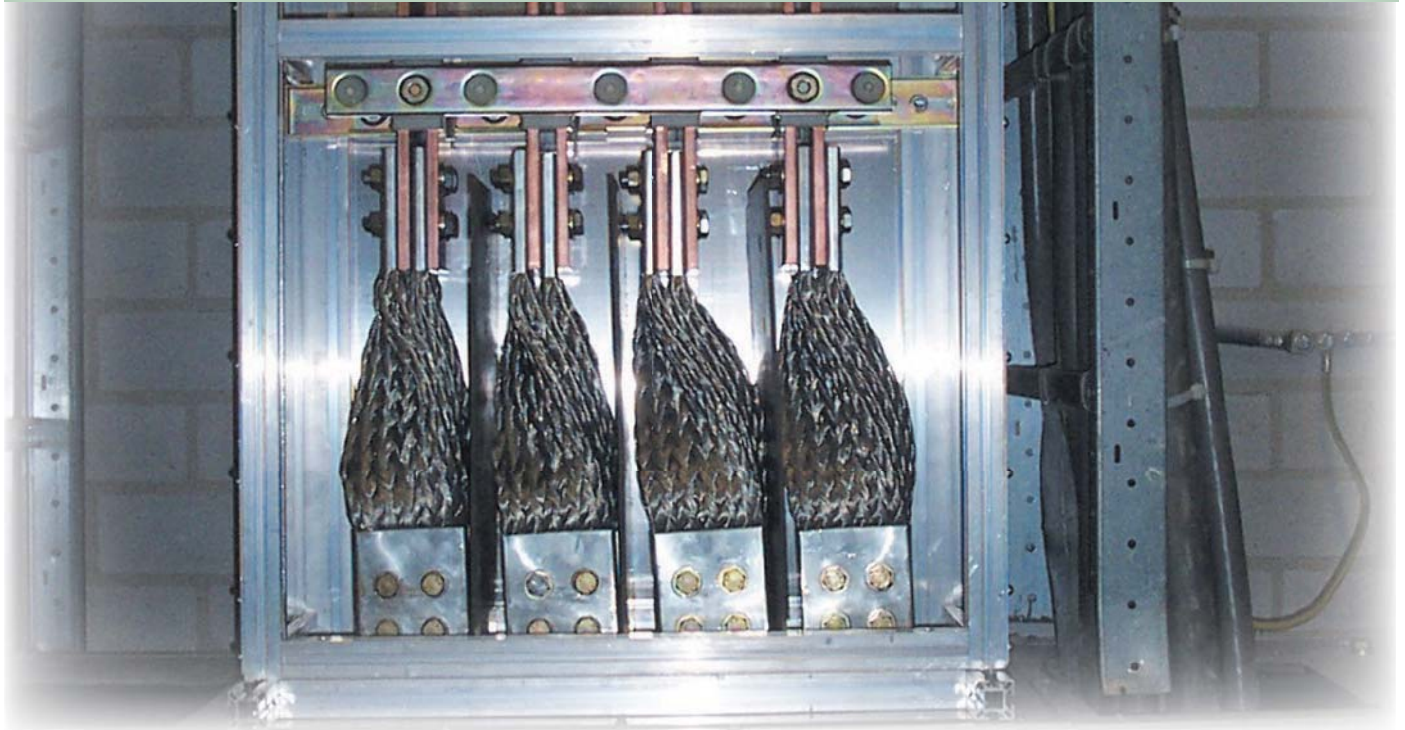

PPS
Presswelded Power Shunts

PBC Application

Part No.	Description	Section mm ²	Intensity (ΔT 30K)		Intensity (ΔT 50K)		A mm	B mm	C mm	L mm	H mm		 Kg
													
566000	PPS 40/5/50-180	200	572	984	758	1304	50	40	5	180	45	2	0,390
566020	PPS 40/10/50-220	400	849	1460	1125	1935	50	40	10	220	58	2	0,930
566030	PPS 50/10/80-280	500	1022	1758	1354	2329	80	50	10	280	58	1	1,440
566040	PPS 80/10/100-320	800	1511	2493	2002	3303	100	80	10	320	52	1	2,625
566050	PPS 100/10/100-300	1000	1825	2920	2418	3869	100	100	10	300	54	1	3,065
566060	PPS 100/10/110-360	1000	1825	2920	2418	3869	110	100	10	360	53	1	3,610
566070	PPS 100/15/110-360	1500	2178	3485	2886	4617	110	100	15	360	57	1	5,385



Custom Solutions

ERICO can provide made-to-order, custom configurations to your drawing specifications.

ERICO copper braids can be made to custom lengths, widths, thicknesses and hole patterns; with PVC installation; in flat or tubular shapes; using copper wire; in continuous coils; or with soldered studs or crimped lugs. Let ERICO solve your design and production scheduling challenges.




Press welding is welding of laminations to each other through direct current applied to pieces under pressure.

This technique results in:

- The formation of a solid palm with properties of plain bar
- Smaller cross section for same capacity
- Runs cooler than equal section
- Plain copper, thickness of laminations 0,2 mm
- When used in parallel, the 2 shunts must be spaced with a minimum distance equal to the thickness of the shunt

Flat Copper & Stainless Steel Braids (FTCB, FRCB, FSSB & FTCBI)

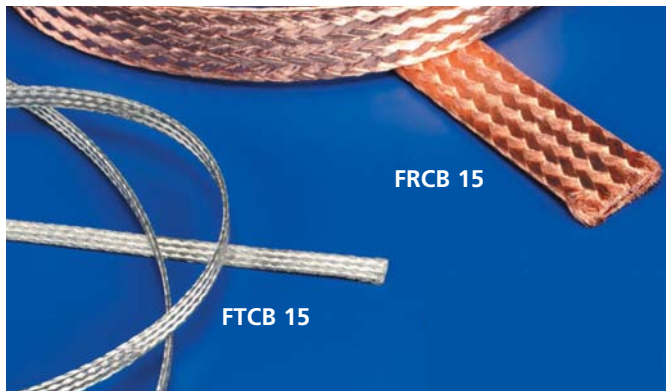

FTCB 15 Flat tinned copper braids

- Standard wire diameter: 0,15 mm
- 25 m coils

Part No.	Description	Section mm²	mm	Number of Wire	Nominal Current A		 Kg
557200	FTCB 15-3	3	5x1	168	30	25 m	0,03
557210	FTCB 15-5	5	8x1	288	45	25 m	0,05
557220	FTCB 15-8	8	8x1,5	456	65	25 m	0,08
557230	FTCB 15-10	10	10x1,5	576	75	25 m	0,10
557240	FTCB 15-16	16	15x1,5	896	120	25 m	0,16
557250	FTCB 15-20	20	20x1,5	1120	140	25 m	0,20
557260	FTCB 15-25	25	23x1,5	1404	150	25 m	0,25
557270	FTCB 15-30	30	23x2,0	1692	180	25 m	0,30
557280	FTCB 15-35	35	23x2,5	1980	200	25 m	0,35
557290	FTCB 15-40	40	25x2,5	2272	220	25 m	0,40
557300	FTCB 15-50	50	28x3	2848	250	25 m	0,50
557310	FTCB 15-60	60	30x3	3392	280	25 m	0,60
557320	FTCB 15-70	70	30x3,5	3968	290	25 m	0,70
557330	FTCB 15-75	75	30x4	4256	300	25 m	0,75
557350	FTCB 15-100	100	40x4	5664	360	25 m	1,00

FRCB 15 Flat plain copper braids

- Standard wire diameter: 0,15 mm
- 25 m coils

Part No.	Description	Section mm²	mm	Number of Wire	Nominal Current A		 Kg
557000	FRCB 15-3	3	5x1	168	30	25 m	0,03
557010	FRCB 15-5	5	8x1	288	45	25 m	0,05
557020	FRCB 15-8	8	8x1,5	456	65	25 m	0,08
557030	FRCB 15-10	10	10x1,5	576	75	25 m	0,10
557040	FRCB 15-16	16	15x1,5	896	120	25 m	0,16
557050	FRCB 15-20	20	20x1,5	1120	140	25 m	0,20
557060	FRCB 15-25	25	23x1,5	1404	150	25 m	0,25
557070	FRCB 15-30	30	23x2,0	1692	180	25 m	0,30
557080	FRCB 15-35	35	23x2,5	1980	200	25 m	0,35
557090	FRCB 15-40	40	25x2,5	2272	220	25 m	0,40
557100	FRCB 15-50	50	28x3	2848	250	25 m	0,50
557110	FRCB 15-60	60	30x3	3392	280	25 m	0,60
557120	FRCB 15-70	70	30x3,5	3968	290	25 m	0,70
557130	FRCB 15-75	75	30x4	4256	300	25 m	0,75
557150	FRCB 15-100	100	40x4	5664	360	25 m	1,00



FTCBI Insulated flat tinned copper braids

- Insulation in clear PVC, thickness 1 mm, self-extinguishing UL® 94 VO
- Standard wire diameter: 0,15 mm
- 25 m coils
- Insulation voltage: 450 V
- Working temperature: up to 70°C

Part No.	Description	Section mm²	mm	Number of Wire	Nominal Current A		 Kg
510300	FTCBI 16	16	17x3,5	896	120	25 m	0,18
510310	FTCBI 25	25	25x3,5	1404	150	25 m	0,29
510320	FTCBI 35	35	25x4,5	1980	200	25 m	0,40
510340	FTCBI 50	50	30x5	2848	250	25 m	0,60
Standard wire diameter 0,15 mm - Extra long reels							
503600	FTCBI 15-16	16	17x3,5	896	120	100 m	0,18
503610	FTCBI 15-25	25	25x3,5	1404	150	100 m	0,29
503620	FTCBI 15-35	35	25x4,5	1980	200	75 m	0,40

FTCB 20 Flat tinned copper braids

- Standard wire diameter: 0,20 mm
- Extra long reels

Part No.	Description	Section mm²	mm	Number of Wire	Nominal Current A		 Kg
503500	FTCB 20-3	3	5x1	96	30	500 m	0,03
503510	FTCB 20-5	5	8x1	168	45	500 m	0,05
503520	FTCB 20-10	10	10x1,5	312	75	150 m	0,10
503530	FTCB 20-16	16	15x2	512	120	150 m	0,16
503540	FTCB 20-25	25	25x1,5	792	150	100 m	0,25

FSSB 25 Stainless steel flat braids

- Standard wire diameter: 0,25 mm
- Stainless steel 316L

Part No.	Description	Section mm²	mm		 Kg
557160	FSSB 25-16²	16	15x1,5	25 m	0,14
557170	FSSB 25-25²	25	23x1,5	25 m	0,22
557390	FSSB 25-50²	50	30x3	25 m	0,44



Round & Tubular Copper Braids (RTCB, RRCB & TTCE)

- A large range of braids
- Bare or insulated

- Tubulars for shielding
- Stainless steel for corrosive environment



RTCB / RTCB HL Tinned copper round braids



- Standard wire diameter: 0,15 mm
- 25 m coils

Part No.	Description	Section mm ²	External dia in mm	Number of Wire	Nominal Current A		Kg
557600	RTCB 15-6	6	4	352	45	25 m	0,06
557610	RTCB 15-8	8	4,5	464	65	25 m	0,08
557620	RTCB 15-10	10	5	560	75	25 m	0,10
557630	RTCB 15-16	16	6	900	120	25 m	0,16
557640	RTCB 15-25	25	8	1416	150	25 m	0,25
557650	RTCB 15-30	30	9	1680	180	25 m	0,30
557660	RTCB 15-50	50	11	2820	250	25 m	0,50
557670	RTCB 15-75	75	13,5	4236	300	25 m	0,75
557680	RTCB 15-100	100	17	5652	360	25 m	1,00
Standard wire diameter 0,15 mm - Extra long reels							
503700	RTCB 15-10/HL	10	5	560	75	100 m	0,100
503710	RTCB 15-16/HL	16	6	900	120	100 m	0,160
503720	RTCB 15-25/HL	25	7,5	1416	150	100 m	0,250
503730	RTCB 15-30/HL	30	8	1680	180	75 m	0,300



RRCB Plain copper round braids

- Standard wire diameter: 0,15 mm
- 25 m coils

Part No.	Description	Section mm ²	External dia in mm	Number of Wire	Nominal Current A		Kg
557400	RRCB 15-6	6	4	352	45	25 m	0,06
557410	RRCB 15-8	8	4,5	464	65	25 m	0,08
557420	RRCB 15-10	10	5	560	75	25 m	0,10
557430	RRCB 15-16	16	6	900	120	25 m	0,16
557440	RRCB 15-25	25	8	1416	150	25 m	0,25
557450	RRCB 15-30	30	9	1680	180	25 m	0,30
557460	RRCB 15-50	50	11	2820	250	25 m	0,50
557470	RRCB 15-75	75	14	4236	300	25 m	0,75
557480	RRCB 15-100	100	18	5652	360	25 m	1,00



TTCE Tinned copper tubular braids

- For screening connecting cables between equipment used in an electromagnetically disturbed environment.
- Supplied with draw wire

Part No.	Description	Section mm ²	Diameter (mm)				Number of Wire	Ø wires mm	Nominal Current A		Kg
			Int.	Covering %	Exp.	Covering %					
510100	TTCE 3	1,7	3	100%	6	90%	96	0,15	13	50 m	0,020
510110	TTCE 5	2,5	5	99%	10	92%	144	0,15	19	50 m	0,026
510120	TTCE 8	4,45	8	99%	16	95%	252	0,15	37	50 m	0,050
510130	TTCE 10	5,7	10	100%	20	92%	320	0,15	43	50 m	0,054
510140	TTCE 15	12	15	100%	30	94%	334	0,20	90	50 m	0,120
510150	TTCE 20	20,4	20	99%	40	87%	288	0,30	122	50 m	0,190
510160	TTCE 25	27,1	25	99%	50	92%	384	0,30	163	25 m	0,270
510170	TTCE 30	33,9	30	100%	60	90%	480	0,30	185	25 m	0,320
510180	TTCE 35	40,7	35	100%	70	94%	576	0,30	244	25 m	0,380
Extra long reels											
504690	TTCE 8/HL	6,8	8	-	16	-	216	0,20	37	200 m	0,050

The primary use of tubular braid is to provide sensitive cables with an EMC/EMI screen to shield them against electromagnetic, electrostatic and radio frequency interference. Optimum screening performance is obtained using copper wire braid that can also be used for earth continuity purposes.

Round Copper Braids (RRCBI & RTCBI)



RRCBI Insulated plain copper round braids

- Insulation in clear PVC, thickness 1 mm, self-extinguishing UL® 94 VO
- Standard wire diameter: 0,15 mm
- Insulation voltage: 450 V
- Working temperature: up to 70°C

Part No.	Description	Section mm²	External dia in mm	Number of Wire	Nominal Current A		 Kg
510500	RRCBI 15-10	10	7	560	75	25 m	0,10
510510	RRCBI 15-16	16	8	900	120	25 m	0,16

On Request Special Manufacturing:

- Tubular braids up to 60 mm diameter maximum
- Flat or round copper braids up to 400 mm² maximum
- Insulation 105° C




RTCBI / RTCBI HL Insulated round tinned copper braids

- Insulation in clear PVC, thickness 1 mm, self-extinguishing UL 94 VO
- Standard wire diameter: 0,15 mm
- 25 m coils
- Insulation voltage: 450 V
- Working temperature: up to 70°C

Part No.	Description	Section mm²	mm	Number of Wire	Nominal Current A		 Kg
503400	RTCBI 15-10	10	7	560	75	25 m	0,12
503410	RTCBI 15-16	16	8	900	120	25 m	0,18
503420	RTCBI 15-25	25	9,5	1416	150	25 m	0,25
503430	RTCBI 15-30	30	10	1680	180	25 m	0,35
503440	RTCBI 15-50	50	12,5	2820	250	25 m	0,58
Standard wire diameter 0,15 mm - Extra long reels							
503800	RTCBI 15-10HL	10	7	560	75	100 m	0,12
503810	RTCBI 15-16HL	16	8	900	120	100 m	0,18
503820	RTCBI 15-25HL	25	9,5	1416	150	100 m	0,28
503830	RTCBI 15-30HL	30	10	1680	180	75 m	0,35

Make Your Own Braided Connections

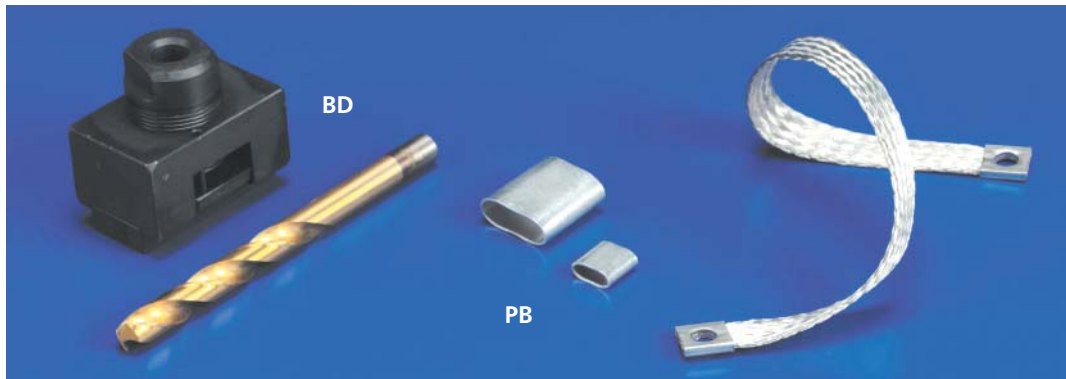

BD

Crimp and drill tool

- This tool has been developed by ERICO specifically for crimping and drilling of braid terminals. Guide and specially adapted drill bit included.

Part No.	Description	For Flat	Ø Drill Bit	Bolt		 Kg
558610	BD 16	FTCB or FRCB 15-16	6,5	M6	1	0,653
558640	BD 16-8,5	FTCB or FRCB 15-16	8,5	M8	1	0,653
558620	BD 25	FTCB or FRCB 15-25	11	M10	1	0,678
558630	BD 50	FTCB or FRCB 15-50	12,5	M126	1	0,712

HCT 3-4

Crimping tool for hydraulic work center


- This package allows to crimp lugs PB16, PB25 and PB50 on braids with the hydraulic ERICO Puncher.

Part No.	Description		 Kg
545980	HCT 3-4	1	1,850

PB

Lugs for flat braids (FTCB or FCRB)

- In tinned annealed copper







Part No.	Description	For Flat	A	B	e		 Kg
557180	PB 16	FTCB or FRCB 15-16	16	15	1	100	0,004
557190	PB 25	FTCB or FRCB 15-25	22	25	1	100	0,010
557380	PB 50	FTCB or FRCB 15-50	30	30	1	100	0,017

ABOUT ELECTROMAGNETIC COMPATIBILITY...

In an environment where electromagnetic disturbances are more and more numerous, the ElectroMagnetic Compatibility (EMC) is increasingly important in the design and building of electrical panels.

In order to avoid stray currents, it is necessary that all the metallic framework, inside the panel or outside, is at the same electrical potential. Thus, it is essential to link all these metal parts with connections presenting a low impedance at High Frequency (H.F.).

Connections with cables are not efficient. Only short and flat conductors are. Their H.F. impedances are 10 times lower than the wire impedances.



Made to Order Solutions (MTO)


ERICO® FLEXIBAR® Custom Solutions (Made to Order)

ERICO can provide preformed ERICO FLEXIBAR configurations to your drawing specifications. ERICO FLEXIBAR can be cut, punched, twisted or bent to address your most challenging panelboard designs and production scheduling requirements. Give ERICO your low voltage connection challenges!



Braided Conductors Custom Solutions (Made to Order)

ERICO® brand of copper braids can be made to custom lengths, widths, thicknesses and hole patterns; with PVC insulation; in flat or tubular shapes; using copper or stainless steel wire; in continuous coils; or with soldered studs or crimped lugs. Let ERICO solve your design and production scheduling challenges.

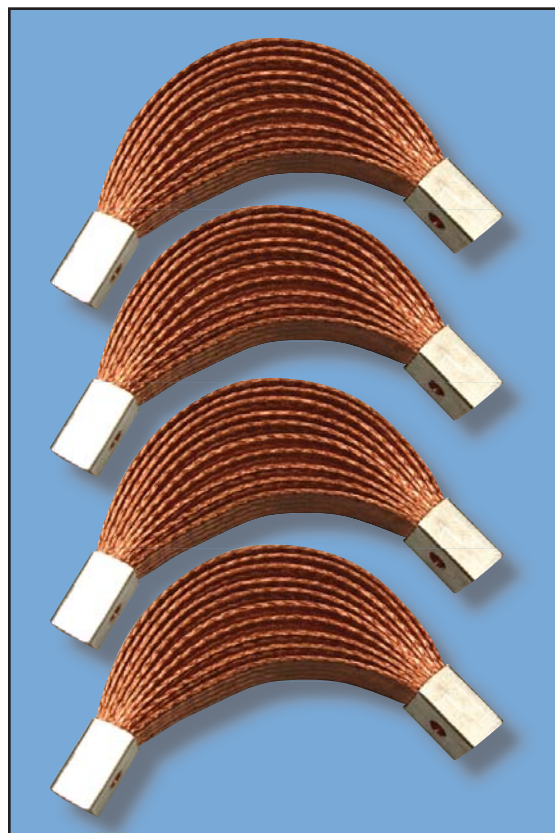

Custom Solutions (Made to Order) - Check List

Summary of the information we need for custom design work. Please photocopy this page and complete it by providing the information you know and sending to your local ERICO customer service representative. (Sections can be left blank)

Electrical Function:

Earthing/grounding conductor ☐
 Power conductor ☐
 Nominal current.....A
 Alternating or direct current.....
 Nominal voltage.....V
 Insulation specification (if required).....


Material:


Red/plain copper..... ☐
 Tinned copper ☐
 Stainless steel ☐
 Aluminum..... ☐
 Other.....

Environment:

Ambient temperature.....C°
 Operating temperature.....C°
 Conductor maximum temperature.....C°
 Humidity (dry/average/moist).....%HR


Extremity/terminal dimensions: Indicate your dimensions on the proposed terminal drawing or make a sketch showing your needs.

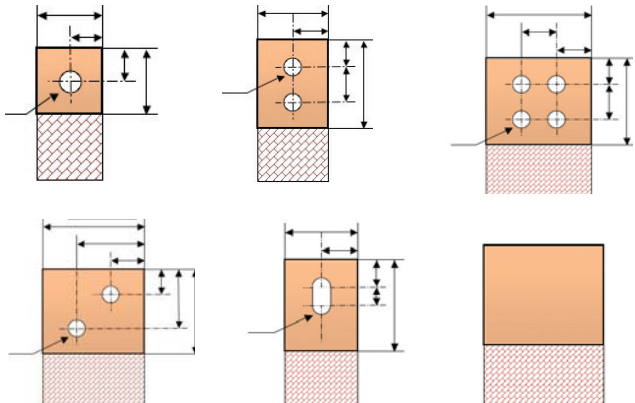

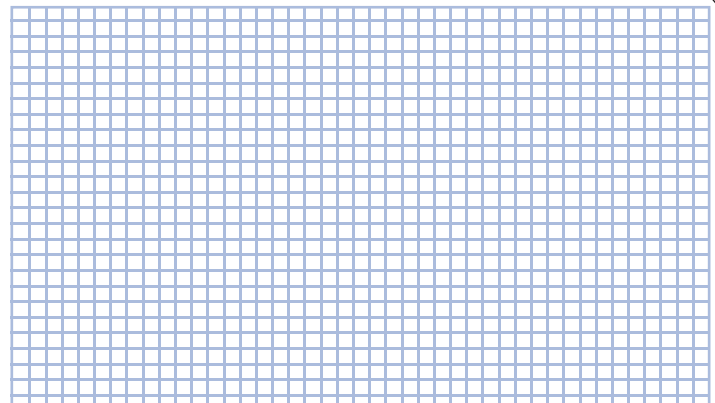

Conductor Dimensions:

Availability: Drawing ☐ Specification ☐ Samples ☐
 Cross Section mm²
 Flat or Round Section
 Width of the Conductor mm
 Thickness of the Conductor mm
 Length of the Conductor mm
 Quantity

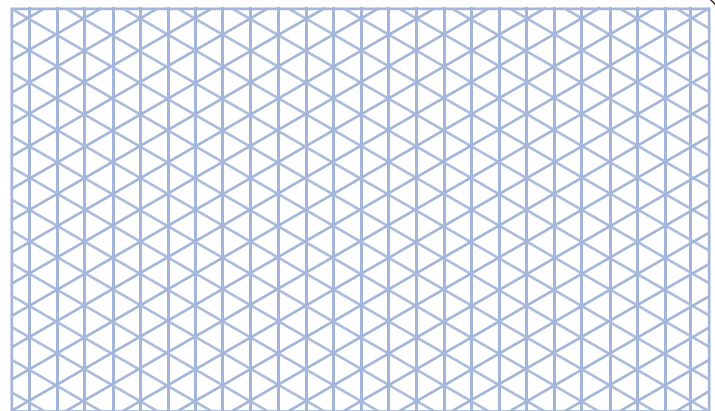

Contact/Requested by:

Company
 Contact Name
 Phone Number

E-mail address
 Address (City & Country)

Cross Reference List

Part Number	Page
503400	38
503410	38
503420	38
503430	38
503440	38
503500	36
503510	36
503520	36
503530	36
503540	36
503600	36
503610	36
503620	36
503700	37
503710	37
503720	37
503730	37
503800	38
503810	38
503820	38
503830	38
504690	37
505501	13
505502	13
505503	13
505506	13
505507	13
505508	13
505514	13
505515	13
510100	37
510110	37
510120	37
510130	37
510140	37
510150	37
510160	37
510170	37
510180	37
510300	36
510310	36
510320	36
510340	36
510500	38
510510	38
538650	11
541020	13
541060	13
541070	13
541090	13
541100	13
541110	13
541150	13
541160	13
541170	13
541230	13
541240	13
541774	16
541775	16

Part Number	Page
541776	16
541800	16
541805	16
541810	16
541815	16
545980	39
552390	11
552390	13
552400	11
552400	13
552410	11
552410	13
552420	11
552420	13
552430	11
552430	13
552440	11
552440	13
552450	11
552450	13
552460	11
552460	13
552470	11
552470	13
552480	11
552480	13
552490	11
552490	13
552500	11
552500	13
552510	11
552510	13
552520	11
552530	11
552540	11
552550	11
552550	13
552560	11
552560	13
552570	11
552570	13
552580	11
552590	11
552600	11
552610	11
552620	11
552620	13
552630	11
552630	13
552640	11
552640	13
552650	11
552660	11
552670	11
552680	11
552690	11
552690	13
552700	11
552700	13
552710	11

Part Number	Page
552710	13
552720	11
552730	11
552740	11
552750	11
552760	11
552760	13
552770	11
552780	11
552790	11
552800	11
552810	11
552830	11
552840	11
552850	11
552860	11
552870	11
552880	11
552880	13
552890	11
552900	11
552910	11
552920	11
552930	11
552950	11
552960	11
552970	11
552980	11
552990	11
553020	18
553030	18
553040	18
553050	18
553060	18
553070	18
553100	18
553110	18
553120	18
553200	18
553210	18
553220	18
553230	18
553250	18
553260	18
553370	17
553380	17
553400	19
553405	19
553410	19
553430	19
553440	19
553505	19
553510	19
553520	19
553530	19
553540	19
553550	17
553550	29
553560	17
553560	29



Cross Reference List

Part Number	Page
553570	17
553580	17
553590	17
554277	33
554278	33
554279	33
554280	33
554282	33
554286	33
554299	33
554300	33
554301	33
554302	33
554304	33
554308	33
554321	33
554322	33
554323	33
554324	33
554326	33
554330	33
554343	33
554344	33
554345	33
554346	33
554348	33
554352	33
554365	33
554366	33
554367	33
554368	33
554370	33
554374	33
554378	33
554384	33
556600	31
556610	31
556620	31
556630	31
556640	31
556650	31
556660	31
556670	31
556680	31
556690	31
556700	31
556710	31
556720	31
556730	31
556740	31
556750	31
556760	31
556770	31
556780	31
556790	31
556800	31
556810	31
556820	31
556830	31
556840	31

Part Number	Page
556850	31
556860	31
556900	30
556910	30
556920	30
556930	31
556940	31
556950	31
556960	31
556970	31
556980	31
557000	36
557010	36
557020	36
557030	36
557040	36
557050	36
557060	36
557070	36
557080	36
557090	36
557100	36
557110	36
557120	36
557130	36
557150	36
557160	36
557170	36
557180	39
557190	39
557200	36
557210	36
557220	36
557230	36
557240	36
557250	36
557260	36
557270	36
557280	36
557290	36
557300	36
557310	36
557320	36
557330	36
557350	36
557380	39
557390	36
557400	37
557410	37
557420	37
557430	37
557440	37
557450	37
557460	37
557470	37
557480	37
557600	37
557610	37
557620	37
557630	37

Part Number	Page
557640	37
557650	37
557660	37
557670	37
557680	37
558240	27
558241	27
558242	27
558243	27
558244	27
558249	27
558250	27
558255	27
558256	27
558260	27
558261	27
558262	27
558263	27
558264	27
558270	27
558271	27
558272	27
558273	27
558274	27
558276	27
558280	27
558281	27
558282	27
558283	27
558284	27
558285	27
558290	27
558291	27
558292	27
558293	27
558294	27
558295	27
558310	19
558340	19
558370	19
558410	19
558440	19
558460	19
558480	19
558490	19
558500	25
558501	25
558502	25
558503	25
558504	25
558505	25
558506	25
558507	25
558508	25
558509	25
558510	25
558511	25
558512	25
558513	25
558514	25

Cross Reference List

Part Number	Page
558515	25
558516	25
558517	25
558518	25
558519	25
558520	25
558521	25
558522	25
558523	25
558524	25
558525	25
558526	25
558527	25
558528	25
558529	25
558530	25
558531	25
558532	25
558533	25
558534	25
558535	25
558536	25
558537	25
558538	25
558539	25
558540	25
558541	25
558542	25
558543	25
558544	25
558545	25
558546	25
558610	39
558620	39
558630	39
558640	39
558880	19
561200	19
561210	19
561220	19
563300	31
563320	31
563340	31
563350	31
563360	31
563370	31
563380	31
563390	31
563400	31
563410	31
563420	31
563430	31
563440	31
563450	31
563460	31
563470	31
563480	31
563490	31
563500	31


Part Number	Page
563510	31
563520	31
563530	31
563540	31
563550	31
563560	31
564000	34
564010	34
564030	34
564050	34
564100	34
564150	34
564200	34
564250	34
564300	34
564400	34
564500	34
564600	34
564700	34
564800	34
564900	34
564960	34
564961	34
564962	34
564963	34
564964	34
564965	34
564966	34
564967	34
564968	34
564969	34
564970	34
564971	34
564972	34
565000	31
566000	35
566020	35
566030	35
566040	35
566050	35
566060	35
566070	35
566490	15
566500	15
566510	15
566520	15
566550	15
566560	15
566570	15
566580	15
566590	15
566630	15
566640	15
566650	15
566660	15
566670	15
566720	15
566730	15
566750	15
566780	15

Part Number	Page
566800	15
566810	15
568700	18
568730	18
505509*	13
505510*	13
505516*	13
505517*	13
505518*	13
505519*	13
505523*	13
505526*	13
538650*	13
541180*	13
541250*	13
541260*	13
541270*	13
541320*	13
541380*	13
552520*	13
552530*	13
552540*	13
552580*	13
552590*	13
552600*	13
552610*	13
552650*	13
552660*	13
552670*	13
552680*	13
552720*	13
552730*	13
552740*	13
552750*	13
552770*	13
552780*	13
552790*	13
552800*	13
552810*	13
552830*	13
552840*	13
552850*	13
552860*	13
552870*	13
552890*	13
552900*	13
552910*	13
552920*	13
552930*	13
552950*	13
552960*	13
552970*	13
552980*	13
552990*	13






Power, earthing and grounding conductors, busbar supports and copper busbar, insulators and sleeves solutions.

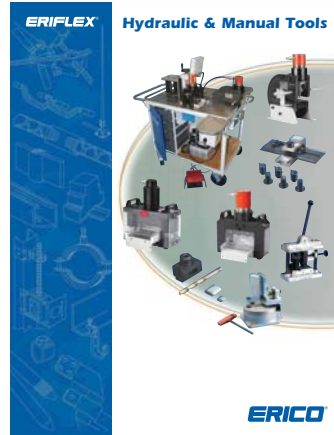

ERICO hydraulic and manual tools for ERICO® FLEXIBAR® flexible busbar and copper busbar manipulation and transformation




Full range of industrial connections and solutions with single and multiple pole distributions blocks, power terminals and power blocks

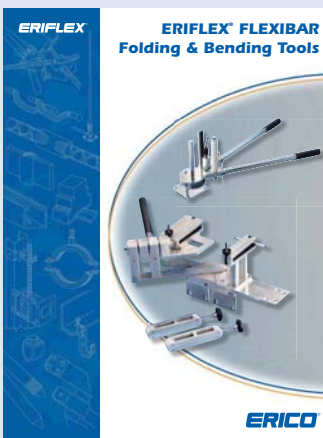


Fold and bend ERICO FLEXIBAR quickly without insulation damage, up to 10x120x1 / 12x100x1 with manual bending and folding tools.



Specific document for earthing and grounding solutions

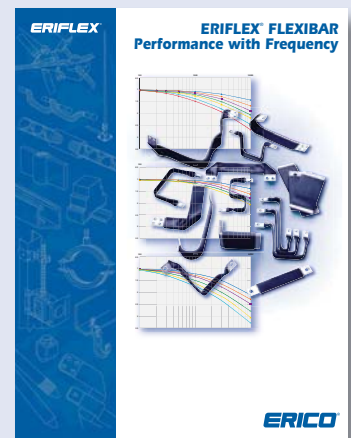

Specific ERICO FLEXIBAR technical data for high frequency applications

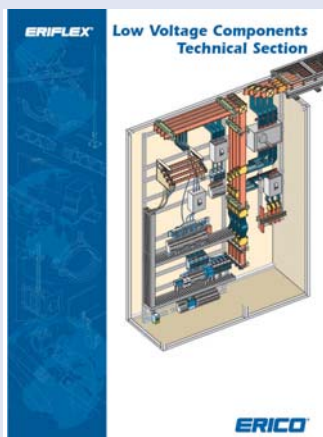

Technical section document for ERICO product range, for general characteristics, main selection criteria, calculation and installation information.



Foundation grounding and construction, power connections, surge protection and lightning protection products for the wind energy industry.



Grounding, lightning protection, electrical connection and cable management solutions for the solar power industry.

+1-604-817-0987

westshorecontrols@gmail.com

Fax : +1-604-943-1661



www.westshorecontrols.com



AUSTRALIA

Phone 1-800-263-508
Fax 1-800-423-091



CHINA

Phone +86-21-3430-4878
Fax +86-21-5831-8177



HUNGARY

Phone 06-800-16538
Fax +39-0244-386-107



NORWAY

Phone 800-100-73
Fax 800-100-66



SWITZERLAND

Phone 0800-55-86-97
Fax 0800-55-96-15



BELGIUM

Phone 0800-757-48
Fax 0800-757-60



DENMARK

Phone 808-89-372
Fax 808-89-373



INDONESIA

Phone +62-21-575-0941
Fax +62-21-575-0942



POLAND

Phone +48-71-349-04-60
Fax +48-71-349-04-61



THAILAND

Phone +66-2-267-5776
Fax +66-2-636-6988



BRAZIL

Phone +55-11-3623-4333
Fax +55-11-3621-4066



FRANCE

Phone 0-800-901-793
Fax 0-800-902-024



ITALY

Phone 800-870-938
Fax 800-873-935



SINGAPORE

Phone +65-6-268-3433
Fax +65-6-268-1389



**UNITED ARAB
EMIRATES**

Phone +971-4-881-7250
Fax +971-4-881-7270



CANADA

Phone +1-800-677-9089
Fax +1-800-677-8131



GERMANY

Phone 0-800-189-0272
Fax 0-800-189-0274



MEXICO

Phone +52-55-5260-5991
Fax +52-55-5260-3310



SPAIN

Phone 900-993-154
Fax 900-807-333



UNITED KINGDOM

Phone 0808-2344-670
Fax 0808-2344-676



CHILE

Phone +56-2-370-2908
Fax +56-2-369-5657



HONG KONG

Phone +852-2764-8808
Fax +852-2764-4486



NETHERLANDS

Phone 0800-0200-135
Fax 0800-0200-136



SWEDEN

Phone 020-790-908
Fax 020-798-964



UNITED STATES

Phone 1-800-753-9221
Fax +1-440-248-0723



ABS is a registered certification mark of American Bureau of Shipping.
CSA is a registered trademark of the Canadian Standards Association.
IEC is a registered trademark of Internationale Commission Electrotechnique.
UL is a registered trademark of UL LLC.

Copyright ©2015, 2013, 2012 ERICO International Corporation. All rights reserved.
CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.

P1224C-WWEN P162LT15WWEN 3.5M0315